

AMERICAN NATIONAL STANDARD

Spindle Noses and Tool Shanks for Milling Machines

ANSI B5.18 - 1972

(REVISION OF B5.18-1960)

REAFFIRMED 1991

REAFFIRMED 1998

FOR CURRENT COMMITTEE PERSONNEL
PLEASE SEE ASME MANUAL AS-11

SOCIETY OF AUTOMOTIVE ENGINEERS
SOCIETY OF MANUFACTURING ENGINEERS
NATIONAL MACHINE TOOL BUILDERS' ASSOCIATION
THE AMERICAN SOCIETY OF MECHANICAL ENGINEERS

PUBLISHED BY

THE AMERICAN SOCIETY OF MECHANICAL ENGINEERS

United Engineering Center

345 East 47th Street

New York, N. Y. 10017

Any part of this standard may be quoted. Credit lines should read: "Extracted from American National Standard Spindle Noses and Tool Shanks for Milling Machines" (ANSI B5.18-1972), with the permission of the publisher, The American Society of Mechanical Engineers, United Engineering Center, 345 East 47th Street, New York, N.Y. 10017.

FOREWORD

The first edition of this standard, known as B5.18-1943, resulted from intensive efforts dating back to 1926 by a special group of milling machine manufacturers; it was reaffirmed in 1949, revised in 1953 and again in 1960. ASA B5.18-1960 incorporated several changes and corrections. It also included a new spindle nose size, designated as 50 A, suggested by the 'Society of Manufacturing Engineers' and several recommendations made by a special committee of fifteen milling machine manufacturers appointed by the National Tool Builder's Association. The revised standard reflected accurately the actual practice at this period of time.

This revision is based on the recommendations of the Technical Committee No. 33 of the American National Standards Committee B5 for 'Standardization of Machine Tools, Components, Elements, Performance, and Equipment'. It updates the 1960 standards; incorporates several recommendations made by members of industry as users and by machine tool builders; it follows the Decimal Inch practice according to ASA B87.1-1965. Several notes have been added, tolerances more clearly defined and conformity with pertinent American National Standards obtained.

The true position dimensions and symbols contained herein are based on American National Standard Y14.5-1966 "Dimensioning and Tolerancing for Engineering Drawings."

Upon the suggestion of the International Organization for Standardization (ISO) a No. 45 size number of spindle nose and tool shank has been added to meet a need for an intermediate size between the 40 and 50 size numbers.

The draft of the proposed revision was submitted to the Technical Committee No. 33 for final review and comments.

The final draft of the proposed revision was processed according to the established procedures of ANSI; it was voted on by letter ballot, approved by the American National Standards Institute on August 22, 1972 as ANSI B5.18-1972.

AMERICAN NATIONAL STANDARDS COMMITTEE B5
MACHINE TOOLS, COMPONENTS, ELEMENTS, PERFORMANCE
AND EQUIPMENT

(The following is the roster of the Committee at the time of approval of this standard)

OFFICERS

W. L. McCann, Chairman

A. W. Colton, Vice-Chairman, Group A	C. C. Blake, Vice-Chairman, Group B
*Paul Ackermann, Vice-Chairman, Group C	Harold Cooper, Vice-Chairman, Group D
E. J. Loeffler, Secretary	

STANDARDS COMMITTEE

AMERICAN SOCIETY OF MECHANICAL ENGINEERS

F. Steele Blackall, III, The Taft-Pierce Manufacturing Company, Woonsocket, Rhode Island
C. T. Blake, The Warner & Swasey Company, Cleveland, Ohio
W. L. McCann, Giddings & Lewis Inc., Fond du Lac, Wisconsin

DEFENSE INDUSTRIAL PLANT EQUIPMENT CENTER

W. J. Taylor, Memphis, Tennessee
R. T. Hoffman, Alternate, Memphis, Tennessee

NATIONAL MACHINE TOOL BUILDERS' ASSOCIATION

Charles Brien, Bullard Company, Bridgeport, Connecticut
E. J. Loeffler, National Machine Tool Builders' Assn., McLean, Virginia
E. A. Munschauer, Jr., Niagara Machine & Tool Works, Buffalo, New York

SOCKET SCREW PRODUCTS BUREAU

Paul Pick, Allen Manufacturing Company, Hartford, Connecticut

SOCIETY OF AUTOMOTIVE ENGINEERS

A. J. McLaren, The Cross Company, Fraser, Michigan
W. H. Seacord, International Harvester Company, Hinsdale, Illinois

SOCIETY OF MANUFACTURING ENGINEERS

Richard Pugh, Jones & Lamson Division of Waterbury Farrell, Springfield, Vermont
J. J. Fickers, Alternate, Westinghouse Electric Corporation, Mansfield, Ohio

TELEPHONE GROUP

M. C. Berryman, Western Electric Company, Inc., Chicago, Illinois
S. P. Rogacki, Alternate, Western Electric Company, Inc., Kearney, New Jersey

U.S. DEPARTMENT OF THE ARMY

R. K. Freeman, Liaison, U.S. Army Weapons Command, Rock Island, Illinois
J. N. Segura, Liaison, Alternate, U.S. Army Weapons Command, Rock Island, Illinois

U.S. DEPARTMENT OF COMMERCE

W. O. Bottamiller, (deceased) National Bureau of Standards, Washington, D.C.

U.S. DEPARTMENT OF THE NAVY

J. N. Cornette, Liaison, Naval Ship Systems Command, Washington, D.C.

INDIVIDUAL MEMBERS

Paul Ackermann, Cincinnati Milacron, Cincinnati, Ohio
F. P. Brown, Vienna, Virginia
Arthur Colton, Grosse Point Woods, Michigan
Harold Cooper, Chrysler Corporation, Detroit, Michigan
H. J. Moffatt, Caterpillar Tractor Company, East Peoria, Illinois

* Vice-Chairman concerned with preparation of this Standard.

PERSONNEL OF TECHNICAL COMMITTEE 33
SPINDLE NOSES AND TOOL SHANKS FOR MILLING MACHINES

*B. R. Better, Chairman, Bendix Industrial Tool Division, 1901 S. Rockwell Street,
Chicago, Illinois*
K. H. Coleman, Lockheed Aircraft Corporation, Burbank Division, Burbank, California
W. T. Forward, Farrel Corporation, Rochester, New York
A. D. Gunderson, Kearny & Trecker Corporation, Milwaukee, Wisconsin
J. O. Snyder, (MATF), AF Material Laboratory, Wright-Patterson AFB, Ohio
J. C. Stames, General Dynamics Corporation, Fort Worth, Texas
A. W. Todd, Van Norman Machine Company, Springfield, Massachusetts
E. L. Watelet, Brown & Sharpe Manufacturing Company, North Kingstown, Rhode Island
R. S. Zapf, Western Electric Company, Hawthorn Works, Chicago, Illinois

CONSULTING MEMBERS

C. A. Parske, Kearney & Trecker Corporation, Milwaukee, Wisconsin
Tom Ribich, Weldon Tool Company, Cleveland, Ohio

CONTENTS

	Page
Figure 1 Pilot Lead on Centering Plugs for Flatback Cutters	7
Table 1 Essential Dimensions of Spindle Nose	2
Table 2 Essential Dimensions for Tool Shanks	4
Table 3 Dimensions of Draw-in Bolt Ends	6
Table 4 Essential Dimensions of Spindle Nose with Large Flange	8

**AMERICAN NATIONAL STANDARD
SPINDLE NOSES AND TOOL SHANKS
FOR MILLING MACHINES**

ASMENORMDOC.COM : Click to view the full PDF of ASME B5.18 1972

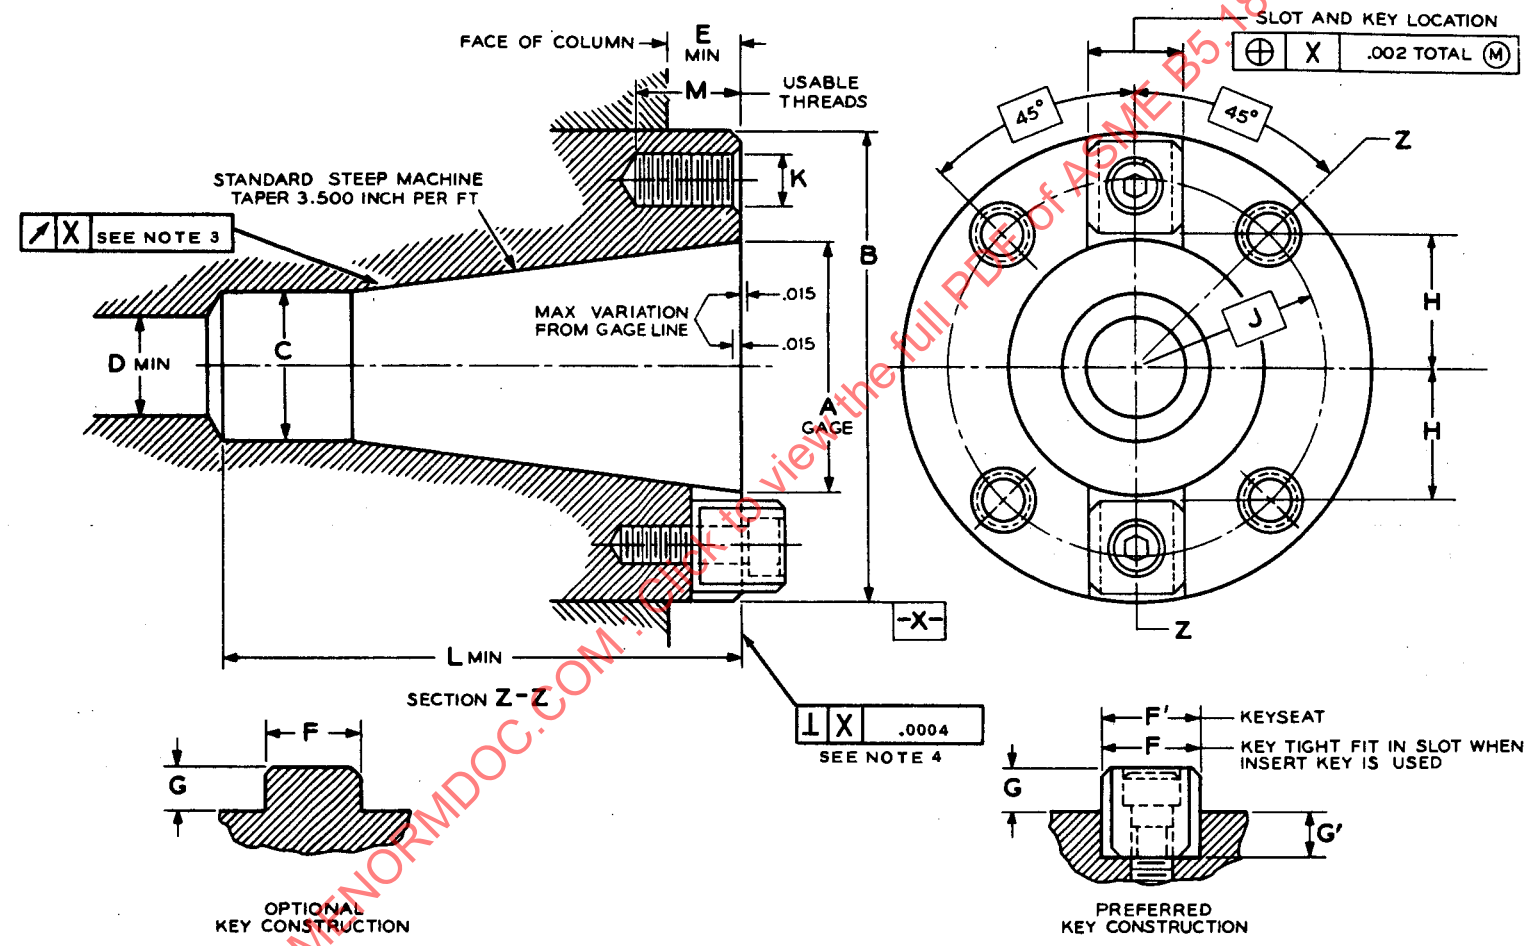


Table 1. Essential Dimensions Of Spindle Nose

Table 1. Essential Dimensions Of Spindle Nose (cont.)

Size Number	Gage Diameter of Taper A	Diameter of Spindle B	Pilot Diameter C	Clearance Hole for Draw-in Bolt Min. D	Minimum Dimension Spindle End to Column E	Width of Driving Key F	Width of Keyseat F'	Maximum Height of Driving Key G	Minimum Depth of Keyseat G'	Distance from Center to Driving Keys H	Radius of Bolt Hole Circle J	Size of Threads for Bolt Holes UNC-2B K	Full Depth of Arbor Hole in Spindle Min. L	Depth of Usable Thread for Bolt Hole M
30	1.250	2.7493 2.7488	0.692 0.685	0.66	0.50	0.6255 0.6252	0.624 0.625	0.31	0.31	0.660 0.654	1.0625 (Note 1)	0.375-16	2.88	0.62
40	1.750	3.4993 3.4988	1.005 0.997	0.66	0.62	0.6255 0.6252	0.624 0.625	0.31	0.31	0.910 0.904	1.3125 (Note 1)	0.500-13	3.88	0.81
45	2.250	3.9993 3.9988	1.286 1.278	0.78	0.62	0.7505 0.7502	0.749 0.750	0.38	0.38	1.160 1.154	1.500 (Note 1)	0.500-13	4.75	0.81
50	2.750	5.0618 5.0613	1.568 1.559	1.06	0.75	1.0006 1.0002	0.999 1.000	0.50	0.50	1.410 1.404	2.000 (Note 2)	0.625-11	5.50	1.00
60	4.250	8.7180 8.7175	2.381 2.371	1.38	1.50	1.0006 1.0002	0.999 1.000	0.50	0.50	2.420 2.414	3.500 (Note 2)	0.750-10	8.62	1.25

All dimensions are given in inches.

TOLERANCES:

Two digit decimal dimensions ± 0.010 unless otherwise specified.

A — See plug gages listed in ANSI B5.10-1963—Table 13.

Taper: Tolerance on rate of taper to be 0.001 inch per foot applied only in direction which decreases rate of taper.

F' — Centrality of Keyway with axis of taper 0.002 total at maximum material condition. (0.002 Total Indicator Variation)

F — Centrality of solid key with axis of taper 0.002 total at maximum material condition. (0.002 Total Indicator Variation)

Size number 45 dimensions from ANSI B5.40-1968 Appendix—Table A3—Page 19.

NOTE 1 — Holes spaced as shown and located within 0.006 Dia of true position

NOTE 2 — Holes spaced as shown and located within 0.010 Dia of true position

NOTE 3 — Maximum turnout on test plug 0.0004 at 1" projection from gage line
0.0010 at 12" projection from gage line

NOTE 4 — Squareness of mounting face measured near mounting bolt hole circle

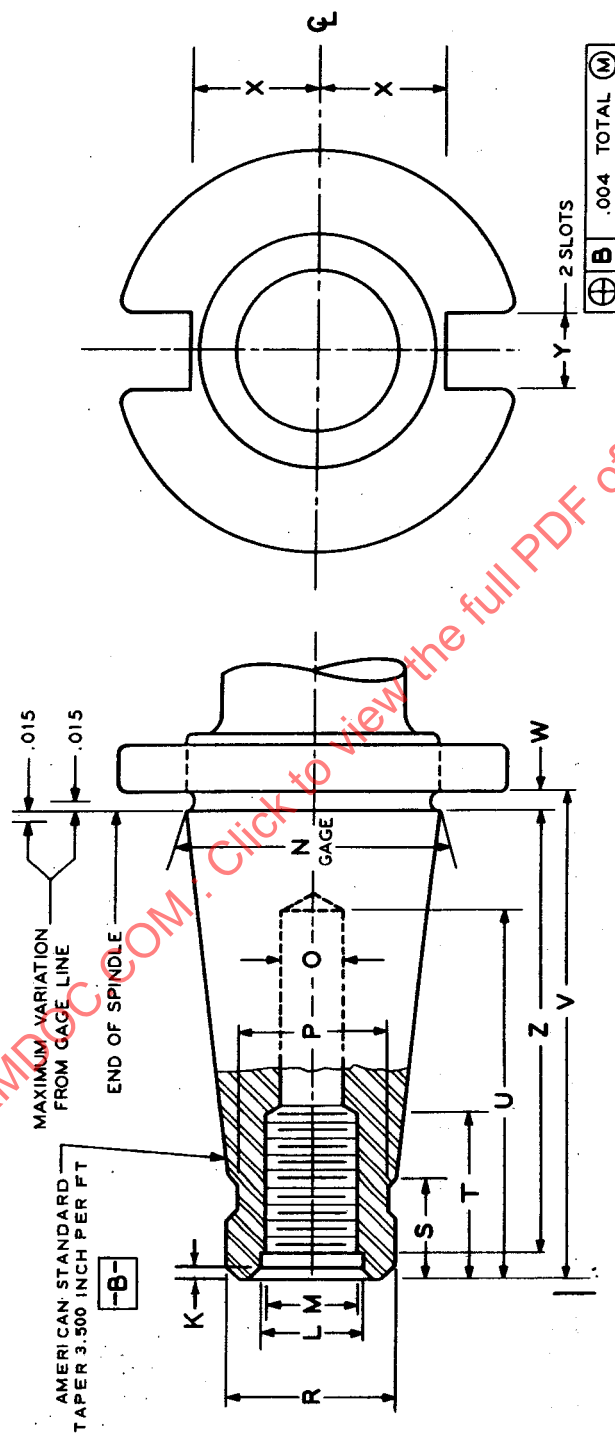


Table 2. Essential Dimensions For Tool Shanks

Table 2. Essential Dimensions for Tool Shanks (cont.)

Size Number	Gage Diameter of Taper	Tap Drill Size for Draw-in Thread	Diameter of Neck	Size of Thread for Draw-in Bolt UNC-2B	Pilot Diameter	Length of Pilot	Minimum Length of Usable Thread	Minimum Depth of Clearance Hole	Distance from Rear of Flange to End of Arbor	Clearance of Flange from Gage Diameter	Tool Shank Center-line to Driving Slot	Width of Driving Slot	Distance From Gage Line to Bottom of C' bore	Depth of 60° Center	Diameter of C' bore
	N	O	P	M	R	S	T	U	V	W	X	Y	Z	K	L
30	1.250	0.422 0.432	0.66 0.65	0.500-13	0.675 0.670	0.81	1.00	2.00	2.75	0.045 0.075	0.640 0.625	0.635 0.645	2.50	0.05 0.07	0.525 0.530
40	1.750	0.531 0.541	0.94 0.93	0.625-11	0.987 0.980	1.00	1.12	2.25	3.75	0.045 0.075	0.890 0.875	0.635 0.645	3.50	0.05 0.07	0.650 0.655
45	2.250	0.656 0.666	1.19 1.18	0.750-10	1.268 1.260	1.00	1.50	2.75	4.38	0.105 0.135	1.140 1.125	0.760 0.770	4.06	0.05 0.07	0.775 0.780
50	2.750	0.875 0.885	1.50 1.49	1.000-8	1.550 1.540	1.00	1.75	3.50	5.12	0.105 0.135	1.390 1.375	1.010 1.020	4.75	0.05 0.12	1.025 1.030
60	4.250	1.109 1.119	2.28 2.27	1.250-7	2.360 2.350	1.75	2.25	4.25	8.25	0.105 0.135	2.400 2.385	1.010 1.020	7.81	0.05 0.12	1.307 1.312

All dimensions are given in inches.

TOLERANCES:

Two digit decimal dimensions ± 0.010 unless otherwise specified.

(M) - Permissible for Class 2B "NoGo" gage to enter five threads before interference.

(N) - See ring gages listed in ANSI B5.10-1963 Table 14 - Taper tolerance on rate of taper to be 0.001 inch per foot applied only in direction which increases rate of taper.

(Y) - Centrality of driveslot with axis of taper shank 0.004 at maximum material condition. (0.004 Total Indicator Variation)

NOTE:

Size Number 45 dimensions from ANSI B5.40 1968 Appendix Table A4 - Page 20.

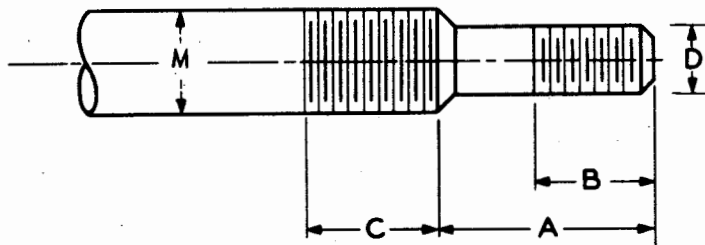



Table 3. Dimensions of Draw-in Bolt Ends

Size Number	Length of Small End A	Length of Usable Thread at Small End B	Length of Usable Thread on Large Diameter C	Size of Thread for Large End UNC-2A M	Size of Thread for Small End UNC-2A D
30	1.06	0.75	0.75	0.500 - 13	0.375 - 16
40	1.25	1.00	1.12	0.625 - 11	0.500 - 13
45	1.50	1.12	1.25	0.750 - 10	0.625 - 11
50	1.50	1.25	1.38	1.000 - 8	0.625 - 11
60	1.75	1.37	2.00	1.250 - 7	1.000 - 8

All dimensions are given in inches.



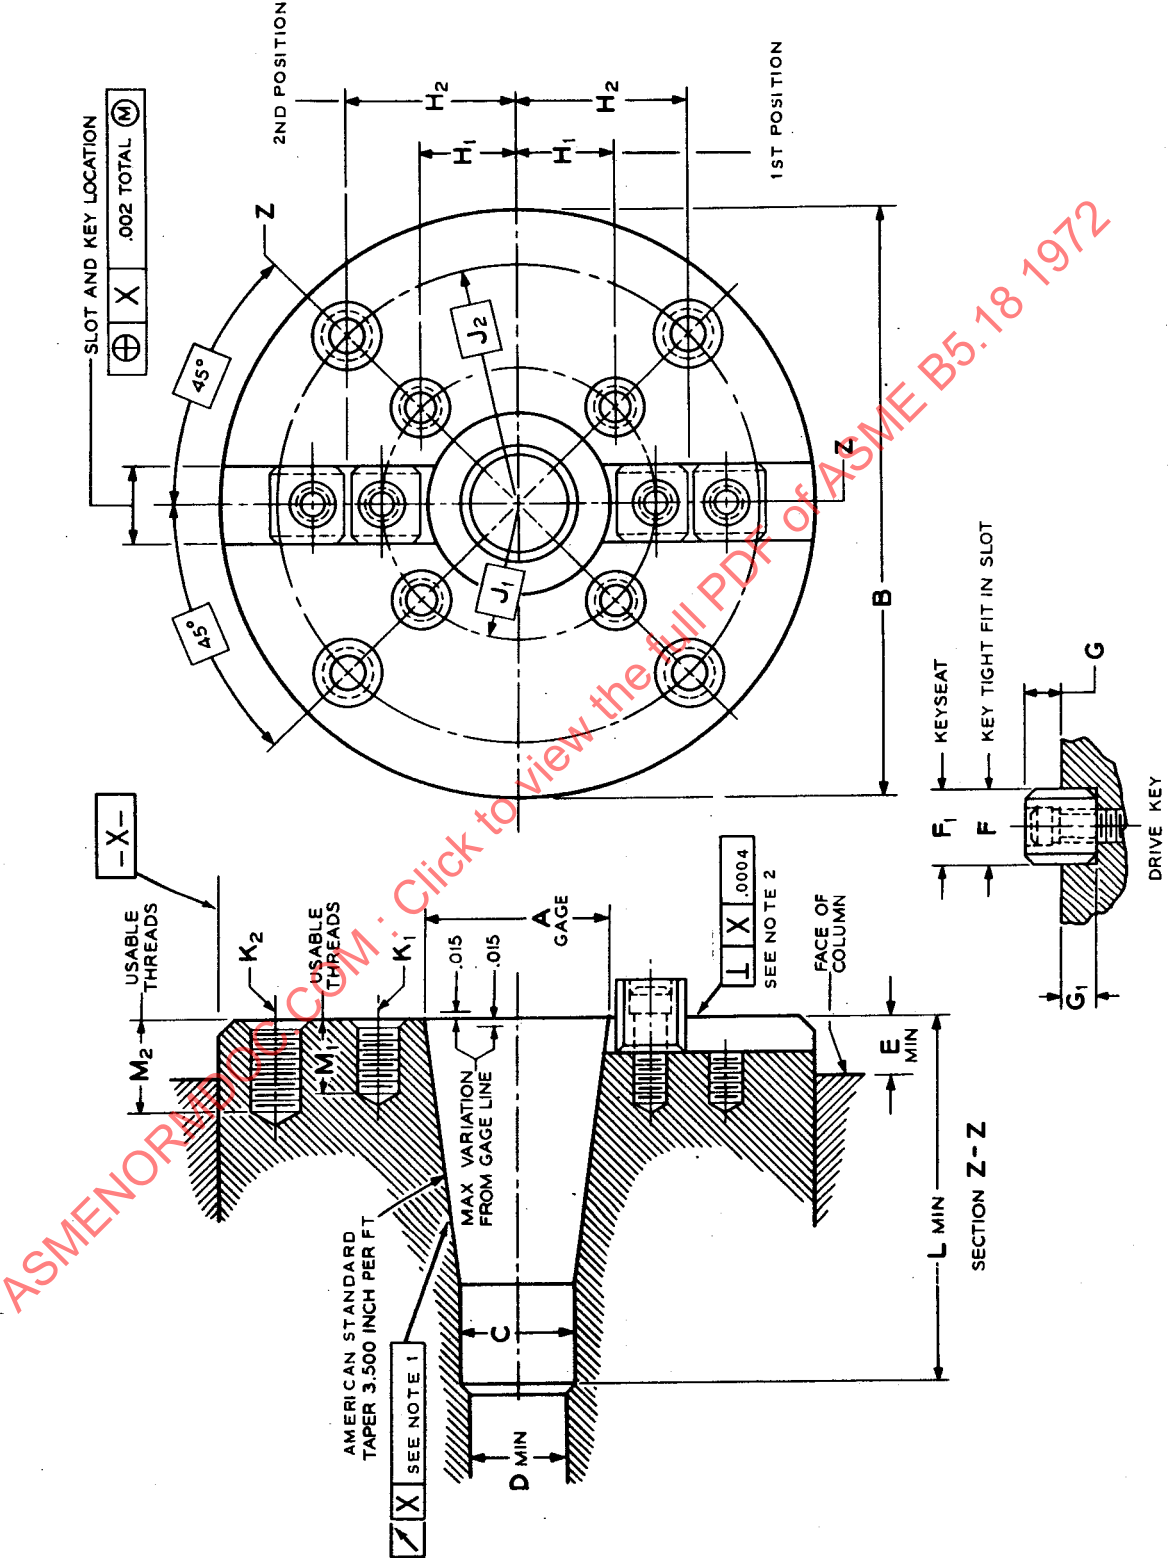


Table 4. Essential Dimensions of Spindle Nose with Large Flange