


Edition 2.0 2024-06 **REDLINE VERSION** 

# INTERNATIONAL **STANDARD**

of 12. 61,06-1.105:2024.RLV vith colour inside

Coaxial communication cables -

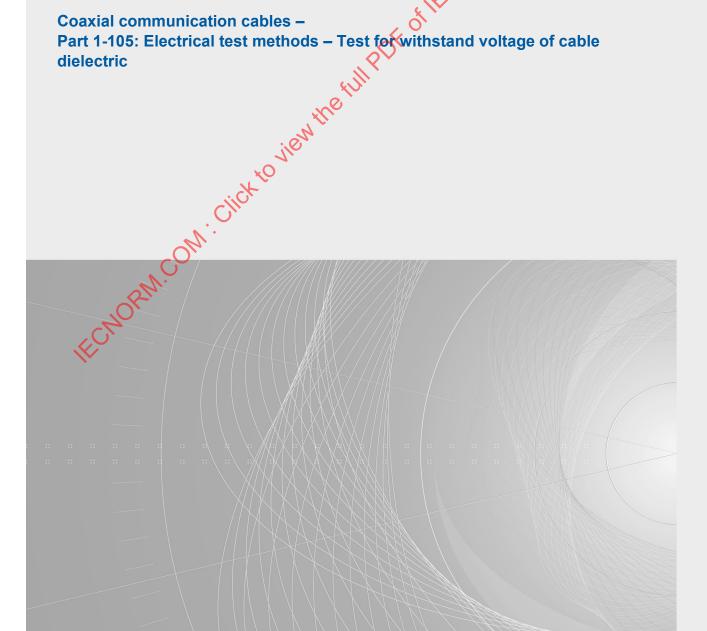



## THIS PUBLICATION IS COPYRIGHT PROTECTED Copyright © 2024 IEC, Geneva, Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either IEC or IEC's member National Committee in the country of the requester. If you have any questions about IEC copyright or have an enquiry about obtaining additional rights to this publication, please contact the address below or your local IEC member National Committee for further information.

Tel.: +41 22 919 02 11

IEC Secretariat 3, rue de Varembé CH-1211 Geneva 20 Switzerland

info@iec.ch www.iec.ch

#### About the IEC

The International Electrotechnical Commission (IEC) is the leading global organization that prepares and publishes International Standards for all electrical, electronic and related technologies.

### About IEC publications

The technical content of IEC publications is kept under constant review by the IEC. Please make sure that you have the latest edition, a corrigendum or an amendment might have been published.

## IEC publications search - webstore.iec.ch/advsearchform

The advanced search enables to find IEC publications by a variety of criteria (reference number, text, technical committee, ...). It also gives information on projects, replaced and withdrawn publications.

## IEC Just Published - webstore.iec.ch/justpublished

Stay up to date on all new IEC publications. Just Published details all new publications released. Available online and once a month by email.

### IEC Customer Service Centre - webstore.iec.ch/csc

If you wish to give us your feedback on this publication or need further assistance, please contact the Customer Service Centre: sales@iec.ch.

## IEC Products & Services Portal - products.iec.ch

Discover our powerful search engine and read freely all the publications previews, graphical symbols and the glossary. With a subscription you will always have access to up to date content tailored to your needs.

## Electropedia.org

The world's leading online dictionary on electrotechnology, containing more than 22 500 terminological entries in English and French, with equivalent terms in 25 additional languages. Also known as the International Electrotechnical Vocabulary (IEV) online.



Edition 2.0 2024-06 REDLINE VERSION

# INTERNATIONAL **STANDARD**

of 12.00 1.105:2024. RIV colour

Coaxial communication cables -

Coaxial communication cables –
Part 1-105: Electrical test methods – Test for withstand voltage of cable dielectric

**INTERNATIONAL ELECTROTECHNICAL** COMMISSION

ICS 33.120.10 ISBN 978-2-8322-9244-0

Warning! Make sure that you obtained this publication from an authorized distributor.

## **CONTENTS**

FOREWORD	3
1 Scope	5
2 Normative references	5
3 Terms and definitions	5
4 Test for withstand voltage of dielectric	5
4.1 Principle	5
4.2 Test equipment	5
4.3 Preparation of the test specimen	6
4.4 Test procedure	6
5 Test report	6
6 Requirements	6
Annex A (normative) Test procedures for the cables with special structure	537
A.1 Armoured cables and cables with intermediate sheaths	7
A.1.1 Armoured cables	7
A.1.2 Cables with intermediate sheaths	7
A.2 Balanced cables	7
A.2.1 Multicore and symmetrical cables	7
A.2 Balanced cables  A.2.1 Multicore and symmetrical cables  A.2.2 Twinax cables	7
A.3 Multi-conductor or hybrid cables	7
Bibliography	8

HECNORIN. COM. Citck to view the full P

## INTERNATIONAL ELECTROTECHNICAL COMMISSION

## **COAXIAL COMMUNICATION CABLES -**

## Part 1-105: Electrical test methods – Test for withstand voltage of cable dielectric

## **FOREWORD**

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the international Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as hearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) IEC draws attention to the possibility that the implementation of this document may involve the use of (a) patent(s). IEC takes no position concerning the evidence, validity or applicability of any claimed patent rights in respect thereof. As of the date of publication of this document, IEC had not received notice of (a) patent(s), which may be required to implement this document. However, implementers are cautioned that this may not represent the latest information, which may be obtained from the patent database available at https://patents.iec.ch. IEC shall not be held responsible for identifying any or all such patent rights.

This redline version of the official IEC Standard allows the user to identify the changes made to the previous edition IEC 61196-1-105:2005. A vertical bar appears in the margin wherever a change has been made. Additions are in green text, deletions are in strikethrough red text.

IEC 61196-1-105 has been prepared by subcommittee 46A: Coaxial cables, of IEC technical committee 46: Cables, wires, waveguides, R.F. connectors, R.F. and microwave passive components and accessories. It is an International Standard.

This second edition cancels and replaces the first edition published in 2005. This edition constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition:

- a) The scope provides indication on the specific area concerned.
- b) The test equipment is updated.
- c) The rate of increase of the test voltage has been changed.
- d) The leakage current has been taken into consideration in the test report and requirements.
- e) The test procedures for the cables with special structure are specified in Annex A.

The text of this International Standard is based on the following documents:

Draft	Report on voting
46A/1659/CDV	46A/1676/RVC

Full information on the voting for its approval can be found in the report on voting indicated in the above table.

The language used for the development of this international Standard is English.

This document was drafted in accordance with ISO/IEC Directives, Part 2, and developed in accordance with ISO/IEC Directives, Part 1 and ISO/IEC Directives, IEC Supplement, available at <a href="https://www.iec.ch/members\_experts/refcocs">www.iec.ch/members\_experts/refcocs</a>. The main document types developed by IEC are described in greater detail at <a href="https://www.iec.ch/publications">www.iec.ch/publications</a>.

A list of all parts in the IEC 61196 series, published under the general title Coaxial communication cables, can be found on the IEC website.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under webstore.iec.ch in the data related to the specific document. At this date, the document will be

- reconfirmed,
- withdrawn, or
- revised.

IMPORTANT – The "colour inside" logo on the cover page of this document indicates that it contains colours which are considered to be useful for the correct understanding of its contents. Users should therefore print this document using a colour printer.

## **COAXIAL COMMUNICATION CABLES -**

# Part 1-105: Electrical test methods – Test for withstand voltage of cable dielectric

## 1 Scope

This part of IEC 61196 applies to coaxial communication cables. It specifies test methods for determining the withstand voltage of the dielectric of coaxial cables. It is intended to detect the flaws in the dielectric of finished coaxial cables.

The test procedures for the cables with special structure are specified in Annex A

## 2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 61196-1:2005, Coaxial communication cables Part 1: Generic specification – General, definitions and requirements

## 3 Terms and definitions

For the purposes of this document, the terms and definitions given in IEC 61196-1 apply.

ISO and IEC maintain terminology databases for use in standardization at the following addresses:

- IEC Electropedia: available at https://www.electropedia.org/
- ISO Online browsing platform: available at https://www.iso.org/obp

## 4 Test for withstand voltage of dielectric

## 4.1 Principle

The purpose of the test is to determine the withstand voltage of the dielectric under AC or DC conditions.

## 4.2 Test equipment

- An a.c. or d.c. power supply
- a kilovoltmeter

The test can be carried out by one of the two following test equipment:

- a test set up including an AC or DC power supply, a kilovoltmeter and a milliammeter;
- a Hipot tester capable of performing the withstand voltage test and monitoring leakage current of the cable under test.

The frequency of the AC voltage shall be between 40 Hz and 60 Hz and the waveform shall be sinusoidal.

## 4.3 Preparation of the test specimen

The test shall be carried out on a finished length of cable after the test of continuity. The conductors of both cable ends shall be stripped of a sufficient length to avoid breakdown or partial discharge. The insulation at these points the ends shall be properly cleaned.

## 4.4 Test procedure

The dielectric between the outer conductor and between the inner conductor or conductors of the cable shall be subjected to an a.c. or d.c. voltage for 1 min. The value of the voltage shall comply with that indicated in the relevant sectional or detail specification. The rate of increase of the test voltage shall not exceed 2 kV/s.

The test procedure is as follows:

- a) The well prepared inner conductor and outer conductor shall be connected with the high voltage end and the earth, respectively.
- a) An AC or DC voltage should be applied between the inner and ower conductors of the cable. The test voltage shall be slowly raised to the target voltage as uniformly as possible at a rate of approximately 1/10 of the target voltage per second, but not exceed 1 kV/s.
- b) Unless otherwise specified in the relevant cable specification, the duration of the cable under withstand voltage test shall be 1 min.
- c) The observations from the test to indicate the test result, as well as the spark, disruptive-discharge and the value of the leakage current shall be recorded.

## 5 Test report

The test report shall give the following test conditions:

- temperature, in °C;
- sample length, in m;
- value of applied voltage, in kV RMS for AC voltages or kV for DC voltages;
- frequency, in the case of AC voltage in Hz;
- duration of test, in min;
- value of leakage current of cable under test, in mA;
- indication whether the sample passed or failed the test;
- configuration of the test.

## 6 Requirements

There shall be no breakdown of the dielectric when tested at the voltage given in relevant sectional or detail specification.

The value of the leakage current of the cable under test shall not exceed the value given in the relevant sectional or detail specification when required.

## Annex A

(normative)

## Test procedures for the cables with special structure

#### Armoured cables and cables with intermediate sheaths **A.1**

#### A.1.1 Armoured cables

The test shall be carried out between the inner conductor and outer conductor. If a dielectric strength test for the bedding of armoured cables is required, the test shall be carried out as for a screened cable unless otherwise specified. All inner elements shall be connected together. The armour shall be earthed during the test.

#### A.1.2 Cables with intermediate sheaths

The test shall be carried out between the inner conductor and outer conductor, and outer conductor and intermediate screen. The outer conductor shall be earthed during the test. If multi-intermediate screens are present, the test shall be performed between the intermediate screens as specified in the relevant specification. Either of the intermediate screens shall be POFOTIEC earthed during the test.

#### **A.2 Balanced cables**

#### A.2.1 Multicore and symmetrical cables

The test shall be carried out as follows:

- a) Core-core test: The conductor against conductor; either of the conductors shall be earthed during the test.
- b) Core-screen test (if applicable): The conductor against screen; the screen shall be earthed during the test.
- c) Screen-screen test (if applicable): The screen against screen; either of the screens shall be earthed during the test

#### A.2.2 Twinax cables

The test shall be carried out as follows:

- a) Core-core test: The conductor against conductor; either of the conductors shall be earthed during the test.
- b) Corescreen test: The conductor connected together against all screens; the screens shall be earthed during the test.
- c) Screen-screen test (if applicable): All individual screens connected together against the overall screen; either of the screens shall be earthed during the test.

#### **A.3** Multi-conductor or hybrid cables

The test shall be carried out as follows:

- a) Core-core test: Each conductor against all the other conductors; all other conductors connected together and earthed during the test.
- b) Core-screen test: All conductors connected together against the screen; the screen shall be earthed during the test.

## Bibliography

IEC 61010-2-034:2023, Safety requirements for electrical equipment for measurement, control, and laboratory use - Part 2-034: Particular requirements for measurement equipment for insulation resistance and test equipment for electric strength

IEC 61156-1:2023, Multicore and symmetrical pair/quad cables for digital communications -Part 1: Generic specification

IEC 62783-1:2023, Twinax cables for digital communications - Part 1: Generic specification

IEC 62807-1:2017, Hybrid telecommunication cables - Part 1: Generic specification

EN 50289-1-3:2001, Communication cables – Specifications for test methods Electrical test methods – Dielectric strength

YIN, H.C. and TONG P., Research regarding the Influence of Frequency on Withstand Voltage for RF Coaxial Cable's Dielectric Test. Optical Fiber & Electric Cable and Their Applications, 2023 (in Chinese)

ECMORM. COM. Cick to View the full Politic On State of the Constitution of the Constit




Edition 2.0 2024-06

# INTERNATIONAL **STANDARD**

Coaxial communication cables -

of 12.05.2024. RLV vith

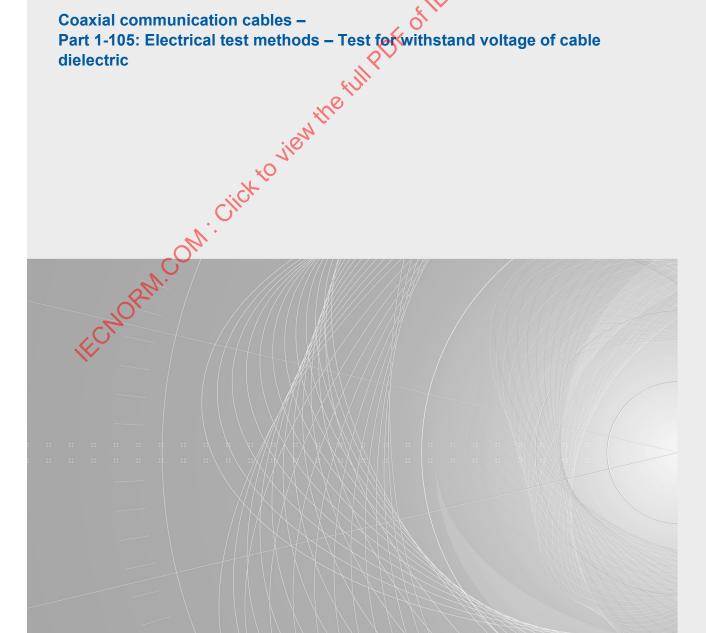

## CONTENTS

FOF	REWO	RD	3
1	Scop	e	5
2	Norm	ative references	5
3	Term	s and definitions	5
4	Test t	for withstand voltage of dielectric	5
2	1.1	Principle	
4		Test equipment\	5
4	1.3	Preparation of the test specimen	6
2	1.4	Test procedure	6
5	Test	report	6
6	Requ	irements	6
Ann	nex A (	normative) Test procedures for the cables with special structure	7
A	<b>A</b> .1	Armoured cables and cables with intermediate sheaths	7
	A.1.1	Armoured cables and cables with intermediate sheaths  Cables with intermediate sheaths  Balanced cables  Multicore and symmetrical cables  Twinax cables	7
	A.1.2	Cables with intermediate sheaths	7
A	٩.2	Balanced cables	7
	A.2.1	Multicore and symmetrical cables	7
	A.2.2	Twinax cables	7
	4.3	Multi-conductor or hybrid cables	7
Bibl	liograp	.hy	8

ECNORM. Click to view the full of the control of th

## INTERNATIONAL ELECTROTECHNICAL COMMISSION

## **COAXIAL COMMUNICATION CABLES -**

## Part 1-105: Electrical test methods – Test for withstand voltage of cable dielectric

## **FOREWORD**

- 1) The International Electrotechnical Commission (IEC) is a worldwide organization for standardization comprising all national electrotechnical committees (IEC National Committees). The object of IEC is to promote international co-operation on all questions concerning standardization in the electrical and electronic fields. To this end and in addition to other activities, IEC publishes International Standards, Technical Specifications, Technical Reports, Publicly Available Specifications (PAS) and Guides (hereafter referred to as "IEC Publication(s)"). Their preparation is entrusted to technical committees; any IEC National Committee interested in the subject dealt with may participate in this preparatory work. International, governmental and non-governmental organizations liaising with the IEC also participate in this preparation. IEC collaborates closely with the international Organization for Standardization (ISO) in accordance with conditions determined by agreement between the two organizations.
- 2) The formal decisions or agreements of IEC on technical matters express, as hearly as possible, an international consensus of opinion on the relevant subjects since each technical committee has representation from all interested IEC National Committees.
- 3) IEC Publications have the form of recommendations for international use and are accepted by IEC National Committees in that sense. While all reasonable efforts are made to ensure that the technical content of IEC Publications is accurate, IEC cannot be held responsible for the way in which they are used or for any misinterpretation by any end user.
- 4) In order to promote international uniformity, IEC National Committees undertake to apply IEC Publications transparently to the maximum extent possible in their national and regional publications. Any divergence between any IEC Publication and the corresponding national or regional publication shall be clearly indicated in the latter.
- 5) IEC itself does not provide any attestation of conformity. Independent certification bodies provide conformity assessment services and, in some areas, access to IEC marks of conformity. IEC is not responsible for any services carried out by independent certification bodies.
- 6) All users should ensure that they have the latest edition of this publication.
- 7) No liability shall attach to IEC or its directors, employees, servants or agents including individual experts and members of its technical committees and IEC National Committees for any personal injury, property damage or other damage of any nature whatsoever, whether direct or indirect, or for costs (including legal fees) and expenses arising out of the publication, use of, or reliance upon, this IEC Publication or any other IEC Publications.
- 8) Attention is drawn to the Normative references cited in this publication. Use of the referenced publications is indispensable for the correct application of this publication.
- 9) IEC draws attention to the possibility that the implementation of this document may involve the use of (a) patent(s). IEC takes no position concerning the evidence, validity or applicability of any claimed patent rights in respect thereof. As of the date of publication of this document, IEC had not received notice of (a) patent(s), which may be required to implement this document. However, implementers are cautioned that this may not represent the latest information, which may be obtained from the patent database available at https://patents.iec.ch. IEC shall not be held responsible for identifying any or all such patent rights.

IEC 61196-1-105 has been prepared by subcommittee 46A: Coaxial cables, of IEC technical committee 46: Cables, wires, waveguides, R.F. connectors, R.F. and microwave passive components and accessories. It is an International Standard.

This second edition cancels and replaces the first edition published in 2005. This edition constitutes a technical revision.

This edition includes the following significant technical changes with respect to the previous edition:

- a) The scope provides indication on the specific area concerned.
- b) The test equipment is updated.
- c) The rate of increase of the test voltage has been changed.

- d) The leakage current has been taken into consideration in the test report and requirements.
- e) The test procedures for the cables with special structure are specified in Annex A.

The text of this International Standard is based on the following documents:

Draft	Report on voting
46A/1659/CDV	46A/1676/RVC

Full information on the voting for its approval can be found in the report on voting indicated in the above table.

The language used for the development of this International Standard is English.

This document was drafted in accordance with ISO/IEC Directives, Part 2 and developed in accordance with ISO/IEC Directives, Part 1 and ISO/IEC Directives, IEC Supplement, available at www.iec.ch/members experts/refdocs. The main document types developed by IEC are described in greater detail at www.iec.ch/publications.

A list of all parts in the IEC 61196 series, published under the general title Coaxial communication cables, can be found on the IEC website.

The committee has decided that the contents of this document will remain unchanged until the stability date indicated on the IEC website under webstore.iec.ch in the data related to the ECMORIN. Click to view the full specific document. At this date, the document will be

## **COAXIAL COMMUNICATION CABLES -**

# Part 1-105: Electrical test methods – Test for withstand voltage of cable dielectric

## 1 Scope

This part of IEC 61196 applies to coaxial communication cables. It specifies test methods for determining the withstand voltage of the dielectric of coaxial cables. It is intended to detect the flaws in the dielectric of finished coaxial cables.

The test procedures for the cables with special structure are specified in Annex A

## 2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IEC 61196-1, Coaxial communication cables – Part 1: Generic specification – General, definitions and requirements

## 3 Terms and definitions

For the purposes of this document, the terms and definitions given in IEC 61196-1 apply.

ISO and IEC maintain terminology databases for use in standardization at the following addresses:

- IEC Electropedia: available at https://www.electropedia.org/
- ISO Online browsing platform: available at https://www.iso.org/obp

## 4 Test for withstand voltage of dielectric

## 4.1 Principle

The purpose of the test is to determine the withstand voltage of the dielectric under AC or DC conditions.

## 4.2 Test equipment

The test can be carried out by one of the two following test equipment:

- a test set up including an AC or DC power supply, a kilovoltmeter and a milliammeter;
- a Hipot tester capable of performing the withstand voltage test and monitoring leakage current of the cable under test.

The frequency of the AC voltage shall be between 40 Hz and 60 Hz and the waveform shall be sinusoidal.

## 4.3 Preparation of the test specimen

The test shall be carried out on a finished length of cable after the test of continuity. The conductors of both cable ends shall be stripped of a sufficient length to avoid breakdown or partial discharge. The insulation at the ends shall be properly cleaned.

## 4.4 Test procedure

The test procedure is as follows:

- a) The well prepared inner conductor and outer conductor shall be connected with the high voltage end and the earth, respectively.
- b) An AC or DC voltage should be applied between the inner and outer conductors of the cable. The test voltage shall be slowly raised to the target voltage as uniformly as possible at a rate of approximately 1/10 of the target voltage per second, but not exceed 1 kW/s.
- c) Unless otherwise specified in the relevant cable specification, the duration of the cable under withstand voltage test shall be 1 min.
- d) The observations from the test to indicate the test result, as well as the spark, disruptive-discharge and the value of the leakage current shall be recorded.

## 5 Test report

The test report shall give the following test conditions:

- temperature, in °C;
- sample length, in m;
- value of applied voltage, in kV RMS for AC voltages or kV for DC voltages;
- frequency, in the case of AC voltage in Hz;
- duration of test, in min;
- value of leakage current of cable under test, in mA;
- indication whether the sample passed or failed the test;
- configuration of the test.

## 6 Requirements

There shall be no breakdown of the dielectric when tested at the voltage given in relevant sectional or detail specification.

The value of the leakage current of the cable under test shall not exceed the value given in the relevant sectional or detail specification when required.