
Tools for pressing — Gas springs —
Part 3:
Gas spring with increased spring force
and compact built height

Outillage de presse — Ressorts à gaz —

Partie 3: Ressorts à gaz à force accrue à faible encombrement en hauteur

STANDARDSISO.COM : Click to view the full PDF of ISO 11901-3:2021



STANDARDSISO.COM : Click to view the full PDF of ISO 11901-3:2021



COPYRIGHT PROTECTED DOCUMENT

© ISO 2021

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
CP 401 • Ch. de Blandonnet 8
CH-1214 Vernier, Geneva
Phone: +41 22 749 01 11
Email: copyright@iso.org
Website: www.iso.org

Published in Switzerland

Contents

	Page
Foreword	iv
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 Description and terminology	1
5 Interchangeability dimensions and characteristics	2
5.1 General nominal specifications	2
5.2 Gas springs of type 1 700 and 3 200	3
5.3 Gas springs of type 3 500 to 15 000	5
5.4 Gas springs of type 24 000 to 200 000	5
6 Pressure filling inlet	10
7 Marking	11
8 Technical delivery conditions	11
9 Designation	11
Bibliography	13

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see www.iso.org/iso/foreword.html.

This document was prepared by Technical Committee ISO/TC 29, *Small tools*, Subcommittee SC 8, *Tools for pressing and moulding*.

This second edition cancels and replaces the first edition (ISO 11901-3:2014), which has been technically revised.

The main changes compared to the previous edition are as follows:

- modification of the nominal initial force of gas springs type 7 500 and 10 000, from 7 500 to 7 400 and from 10 000 to 9 200;
- modification of the end of stroke nominal force increase coefficient to have a range from 1,5 to 1,8 for all gas springs;
- deletion of tolerance on l_6 in [Table 2](#);
- replacement of length l_4 with diameter D_3 in [Table 3](#) and in [Figure 3](#), [Figure 4](#) et [Figure 5](#).

A list of all parts in the ISO 11901 series can be found on the ISO website.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at www.iso.org/members.html.

Tools for pressing — Gas springs —

Part 3:

Gas spring with increased spring force and compact built height

1 Scope

This document specifies the dimensions (in millimetres), nominal initial forces and types of gas springs.

It is applicable to gas springs with increased spring force and compact built height of type 1 700 to 200 000, pressurized with nitrogen with a nominal initial force of between 1 700 N (with a tolerance of ± 5 %) and 200 000 N (with a tolerance of ± 5 %), for use in press tools.

It also specifies marking, technical delivery conditions and designation.

NOTE Specifications of mounting accessories for gas springs are given in ISO 11901-2.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 7-1, *Pipe threads where pressure-tight joints are made on the threads — Part 1: Dimensions, tolerances and designation*

ISO 2768-1, *General tolerances — Part 1: Tolerances for linear and angular dimensions without individual tolerance indications*

3 Terms and definitions


No terms and definitions are listed in this document.

ISO and IEC maintain terminology databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp>
- IEC Electropedia: available at <http://www.electropedia.org/>

4 Description and terminology

See [Figure 1](#).

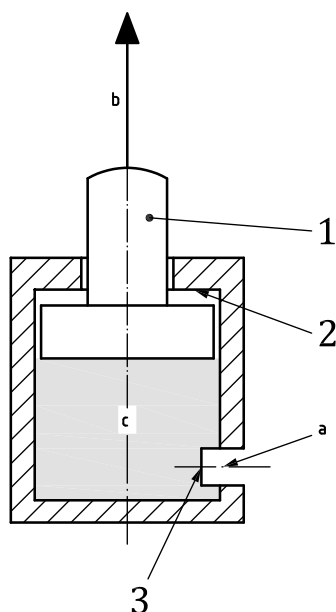

Key

- 1 rod
- 2 positive stop
- 3 valve
- a Pressure filling inlet.
- b Force.
- c Nitrogen.

Figure 1 — Terminology

The gas spring is an autonomous spring pressurized with nitrogen.

At rest position, the rod is pushed out.

This gas spring feature has a gas inlet for pressurization or depressurization. The inlet is located on the casing or on the bottom and is capped.

The pressure filling inlet of gas springs of type of at least 42 000 shall include a pipe thread ISO 7 - Rp 1/8 in accordance with ISO 7-1, and the pressure filling inlet of gas springs of type less than 42 000 shall include an M6 thread.

5 Interchangeability dimensions and characteristics

5.1 General nominal specifications

See [Table 1](#).


Table 1 — General nominal specifications

Type	Nominal initial force N		Maximum filling pressure MPa	End of stroke nominal force increase coefficient
1 700	1 700	±5 %	18	1,5 to 1,8 ^a
3 200	3 200			
3 500	3 600			
5 000	4 700		15	
7 500	7 400			
10 000	9 200			
15 000	15 000			
24 000	24 000			
42 000	42 000			
66 000	66 000			
95 000	95 000			
200 000	200 000			

^a Depending on the stroke.

5.2 Gas springs of type 1 700 and 3 200

See [Figure 2](#) and [Table 2](#).

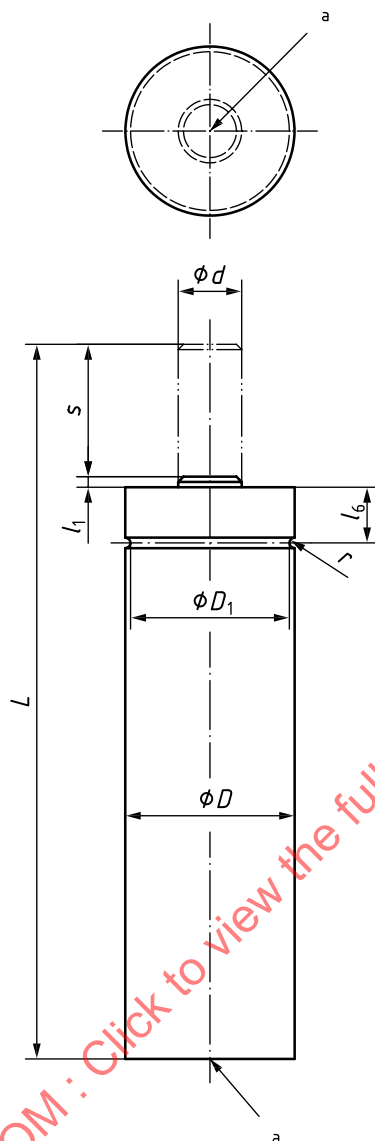

The general tolerance shall be ISO 2768-m according to ISO 2768-1.

a Pressure filling inlet.

Figure 2 — Gas springs of type 1 700 and 3 200

Table 2 — Dimensions of gas springs of type 1 700 and 3 200 — Maximum filling pressure 18 MPa

Dimensions in millimetres


Type	Nominal stroke s	L $\pm 0,25$	l_1 $+1_0$	l_6	r	d	D $\pm 0,3$	D_1 $+0_1$
1 700	10	50	1	16	1	11	19	17
	15	60						
	25	80						
	38	106						
	50	130						
	63	156						
	80	195						
	100	235						
	125	285						
3 200	10	50				15	25	23
	15	60						
	25	80						
	38	106						
	50	130						
	63	156						
	80	195						
	100	235						
	125	285						

5.3 Gas springs of type 3 500 to 15 000

See [Figures 3](#) and [5](#) and [Tables 3](#) and [4](#).

5.4 Gas springs of type 24 000 to 200 000


See [Figures 4](#) and [5](#) and [Tables 3](#) and [4](#).

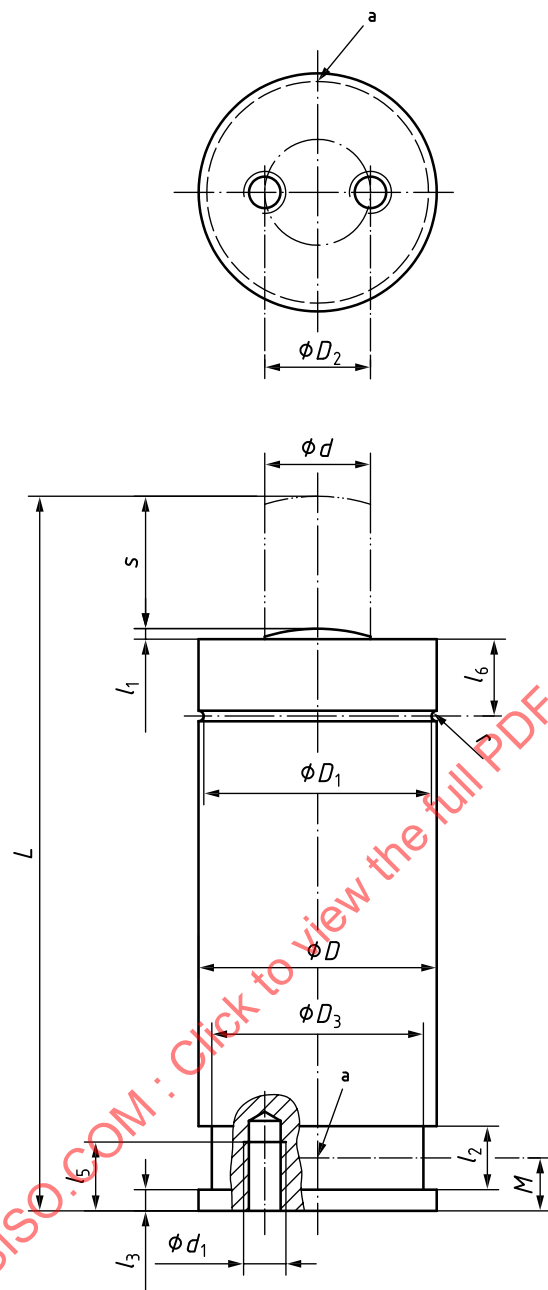

The general tolerance shall be ISO 2768-m according to ISO 2768-1.

^a Pressure filling inlet.

Figure 3 — Gas springs of type 3 500 to 15 000

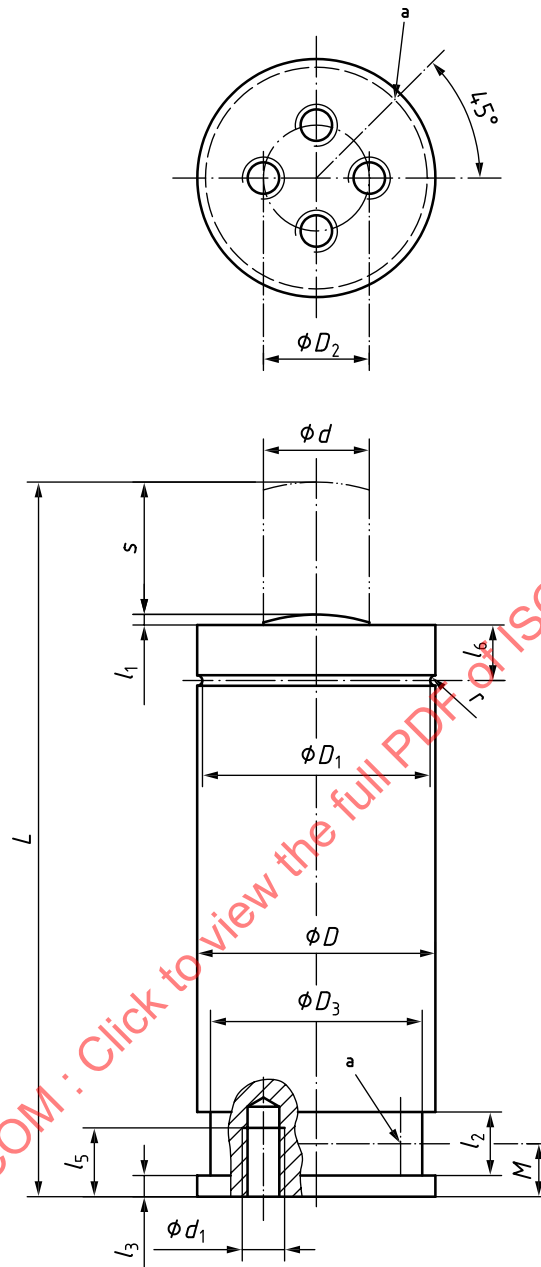

The general tolerance shall be ISO 2768-m according to ISO 2768-1.

a Pressure filling inlet.

Figure 4 — Gas springs of type 24 000 to 200 000

**Table 3 — Dimensions of gas springs of type 3 500 to 200 000 — Maximum filling pressure
18 MPa for type 3 500 and 15 MPa for type 5 000 to 200 000**

Dimensions in millimetres

Type	Nominal stroke <i>s</i>	<i>L</i> ±0,25	<i>l</i> ₁	<i>l</i> ₂ min.	<i>l</i> ₃ ^{+0,15} ₀	<i>D</i> ₃ max.	<i>l</i> ₅ min.	<i>l</i> ₆	<i>r</i>	<i>d</i>	<i>D</i> ±0,3	<i>D</i> ₁ ⁰ _{-0,1}	<i>d</i> ₁	<i>D</i> ₂	Number of holes
3 500	10	50	2	3,5	4	27	6	10,5	1	16	32	30	M6	20	2
	13	56													
	16	62													
	25	80													
	38	106													
	50	130													
	63	156													
	80	190													
	100	230													
	125	280													
5 000	10	50	2	3,5	4	33	6	10,5	1	20	38	36	M6	20	2
	13	56													
	16	62													
	25	80													
	38	106													
	50	130													
	63	156													
	80	190													
	100	230													
	125	280													
7 500	13	58	2	3,5	4	40	6	14,5	1	25	45	43	M8	20	2
	25	82													
	38	108													
	50	132													
	63	158													
	80	192													
	100	232													
	125	282													
10 00	13	64	3	5	8	43	6	14,5	2	28	50	46	M8	20	2
	25	88													
	38	114													
	50	138													
	63	164													
	80	198													
	100	238													
	125	288													

Table 3 (continued)

Type	Nominal stroke <i>s</i>	<i>L</i> ±0,25	<i>l</i> ₁	<i>l</i> ₂ min.	<i>l</i> ₃ ^{+0,15} ₀	<i>D</i> ₃ max.	<i>l</i> ₅ min.	<i>l</i> ₆	<i>r</i>	<i>d</i>	<i>D</i> ±0,3	<i>D</i> ₁ ⁰ _{-0,1}	<i>d</i> ₁	<i>D</i> ₂	Number of holes
15 000	13	70	3	5	8	56	6	16	2	36	63	59	M8	20	2
	25	94													
	38	120													
	50	144													
	63	170													
	80	204													
	100	244													
	125	294													
24 000	25	95	3	5	8	67	6	18	2,5	45	75	70	M8	40	4
	38	121													
	50	145													
	63	171													
	80	205													
	100	245													
	125	295													
42 000	25	108	3	5	8	87	12	21	2,5	60	95	90	M8	60	4
	38	134													
	50	158													
	63	184													
	80	218													
	100	258													
	125	308													
66 000	25	118	3	5	8	112	12	22,5	2,5	75	120	115	M10	80	4
	38	144													
	50	168													
	63	194													
	80	228													
	100	268													
	125	318													
95 000	25	128	3	5	8	142	13	24,5	2,5	90	150	145	M10	100	4
	38	154													
	50	178													
	63	204													
	80	238													
	100	278													
	125	328													


Table 3 (continued)

Type	Nominal stroke s	L $\pm 0,25$	l_1	l_2 min.	l_3 $+0,15$ 0	D_3 max.	l_5 min.	l_6	r	d	D $\pm 0,3$	D_1 0 $-0,1$	d_1	D_2	Number of holes
200 000	25	160	3	8	8	187	16	30,5	2,5	130	195	190	M12	120	4
	38	186													
	50	210													
	63	236													
	80	270													
	100	310													
	125	360													

6 Pressure filling inlet

The pressure filling inlet shall be M6 for gas springs of type 1 700 to 24 000 and ISO 7 - Rp 1/8 in accordance with ISO 7-1 for gas springs of type 42 000 to 200 000 (see [Figure 5](#) and [Table 4](#)).

For gas springs of type 1 700 and 3 200 the pressure filling inlet is located on the bottom.

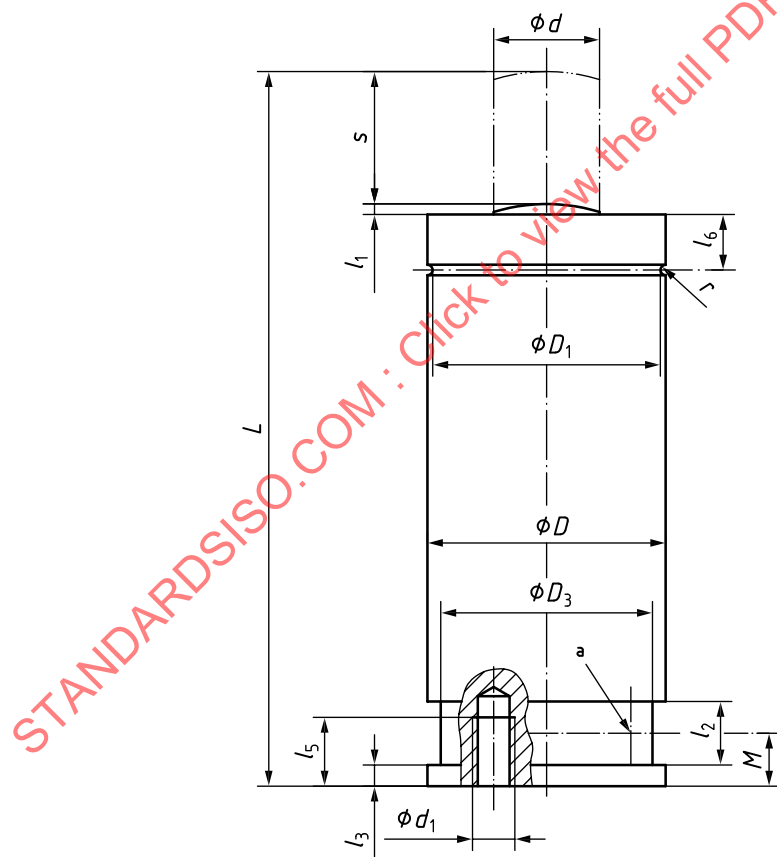

a Pressure filling inlet.

Figure 5 — Filling pressure inlet