

First edition
2012-12-01

Corrected version
2013-01-15

Road vehicles — Unified diagnostic services (UDS) —

**Part 3:
Unified diagnostic services on CAN
implementation (UDSonCAN)**

Véhicules routiers — Services de diagnostic unifiés (SDU) —

Partie 3: SDU sur l'implémentation du gestionnaire de réseau de communication (SDU sur CAN)

STANDARDSISO.COM : Click to view the full PDF of ISO 14229-3:2012



Reference number
ISO 14229-3:2012(E)

© ISO 2012

STANDARDSISO.COM : Click to view the full PDF of ISO 14229-3:2012



COPYRIGHT PROTECTED DOCUMENT

© ISO 2012

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Contents

	Page
Foreword.....	iv
Introduction.....	v
1 Scope.....	1
2 Normative references.....	1
3 Terms, definitions and abbreviated terms.....	1
3.1 Terms and definitions.....	1
3.2 Abbreviated terms.....	1
4 Conventions.....	2
5 Document overview.....	2
6 Unified diagnostic services implementation on CAN.....	4
6.1 General.....	4
6.2 UDS on CAN services overview.....	4
6.3 ResponseOnEvent (0x86) service DoCAN implementation requirements.....	5
6.4 ReadDataByPeriodicIdentifier (0x2A) service.....	7
7 Application layer requirements.....	13
7.1 Application layer services.....	13
7.2 Application layer protocol.....	13
7.3 Application layer timing.....	13
8 Presentation layer requirements.....	13
9 Session layer requirements.....	13
10 Transport/Network layer interface adaptation.....	13
10.1 General information.....	13
10.2 DoCAN Transport/Network layer interface adaptation.....	14
11 Data link layer diagnostic implementation requirements.....	15
11.1 Usage of legislated 11-bit OBD CAN Identifiers for enhanced diagnostics.....	15
11.2 Usage of legislated 29-bit OBD CAN Identifiers for enhanced diagnostics.....	15
Bibliography.....	16

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 14229-3 was prepared by Technical Committee ISO/TC 22, *Road vehicles*, Subcommittee SC 3, *Electrical and electronic equipment*.

This first edition of ISO 14229-3 cancels and replaces ISO 15765-3:2004.

This corrected version incorporates the above information regarding ISO 14229-3 cancelling and replacing ISO 15765-3:2004.

ISO 14229 consists of the following parts, under the general title *Road vehicles — Unified diagnostic services (UDS)*:

- *Part 1: Specification and requirements*
- *Part 2: Session layer services*
- *Part 3: Unified diagnostic services on CAN implementation (UDSonCAN)*
- *Part 4: Unified diagnostic services on FlexRay implementation (UDSonFR)*
- *Part 5: Unified diagnostic services on Internet Protocol implementation (UDSonIP)*
- *Part 6: Unified diagnostic services on K-Line implementation (UDSonK-Line)*

The following parts are under preparation / are planned:

- *Part 7: Unified diagnostic services on Local Interconnect Network implementation (UDSonLIN)*

Introduction

This part of ISO 14229 has been established in order to enable the implementation of unified diagnostic services, as specified in ISO 14229-3, on Controller Area Networks (UDSonCAN).

To achieve this, it is based on the Open Systems Interconnection (OSI) Basic Reference Model specified in ISO/IEC 7498-1 and ISO/IEC 10731, which structures communication systems into seven layers. When mapped on this model, the services specified by ISO 14229 are divided into

- Application layer (layer 7):
 - Vehicle manufacturer enhanced diagnostics: ISO 14229-1, ISO 14229-3,
 - Legislated OBD: ISO 15031-5,
 - Legislated WWH-OBD: ISO 14229-1 / ISO 27145-3;
- Presentation layer (layer 6):
 - Vehicle manufacturer enhanced diagnostics: vehicle manufacturer specific,
 - Legislated OBD: SAE J1930-DA, SAE J1979-DA, SAE J2012-DA,
 - Legislated WWH-OBD: ISO 27145-2 with reference to SAE J1930-DA, SAE J1939, Companion Spreadsheet (SPNs), SAE J1939-73:2010, Appendix A (FMIs), SAE J1979-DA and SAE J2012-DA;
- Session layer services (layer 5):
 - Vehicle manufacturer enhanced diagnostics: ISO 14229-2,
 - Legislated OBD: ISO 14229-2,
 - Legislated WWH-OBD: ISO 14229-2;
- Transport layer services (layer 4):
 - Vehicle manufacturer enhanced diagnostics: ISO 15765-2,
 - Legislated OBD: ISO 15765-2, ISO 15765-4
 - Legislated WWH-OBD: ISO 27145-4;
- Network layer services (layer 3):
 - Vehicle manufacturer enhanced diagnostics: ISO 15765-2,
 - Legislated OBD: ISO 15765-2, ISO 15765-4
 - Legislated WWH-OBD: ISO 27145-4;
- Data link layer (layer 2):
 - Vehicle manufacturer enhanced diagnostics: ISO 11898-1, ISO 11898-2, ISO 11898-3, ISO 11898-5,
 - Legislated OBD: ISO 11898-1, ISO 11898-2, ISO 15765-4,
 - Legislated WWH-OBD: ISO 27145-4;
- Physical layer (layer 1):
 - Vehicle manufacturer enhanced diagnostics: ISO 11898-1, ISO 11898-2, ISO 11898-3, ISO 11898-5,
 - Legislated OBD: ISO 11898-1, ISO 11898-2, ISO 15765-4,

ISO 14229-3:2012(E)

— Legislated WWH-OBD: ISO 27145-4;

in accordance with Table 1.

Table 1 — DoCAN enhanced diagnostics, legislated OBD and WWH-OBD specification reference applicable to the OSI layers

Applicability	OSI 7 layers	Vehicle manufacturer enhanced diagnostics	Legislated OBD (On-Board Diagnostics)	Legislated WWH-OBD (On-Board Diagnostics)	
Seven layer according to ISO/IEC 7498-1 and ISO/IEC 10731	Application (layer 7)	ISO 14229-1, ISO/FDIS 14229-3	ISO 15031-5	ISO 14229-1, ISO 27145-3	
	Presentation (layer 6)	vehicle manufacturer specific	SAE J1930-DA, SAE J1979-DA, SAE J2012-DA	ISO 27145-2 SAE J1930-DA, SAE J1939 Companion Spreadsheet (SPNs), SAE J1939-73:2010, Appendix A (FMIs), SAE J1979-DA, SAE J2012-DA	
	Session (layer 5)	ISO 14229-2			
	Transport (layer 4)	ISO 15765-2	ISO 15765-2, ISO 15765-4	ISO 15765-2, ISO 15765-4	ISO 13400-2
	Network (layer 3)				
	Data link (layer 2)	ISO 11898-1, ISO 11898-2, ISO 11898-3, ISO 11898-5	ISO 11898-1, ISO 11898-2, ISO 15765-4	ISO 11898-1, ISO 11898-2, ISO 15765-4	ISO 27145-4
Physical (layer 1)					

STANDARDSISO.COM : Click to view the full PDF of ISO 14229-3:2012

Road vehicles — Unified diagnostic services (UDS) —

Part 3:

Unified diagnostic services on CAN implementation (UDSonCAN)

1 Scope

This part of ISO 14229 specifies the implementation of a common set of unified diagnostic services (UDS) on controller area networks (CAN) in road vehicles (UDSonCAN).

UDSonCAN references ISO 14229-1 and ISO 14229-2 and specifies implementation requirements of the diagnostic services to be used for diagnostic communication over CAN.

NOTE UDSonCAN does not specify any requirement for the in-vehicle CAN bus architecture.

This part of ISO 14229 does not include any redundant information of the documents as listed in the Introduction. It focuses on

- additional requirements specific to the implementation of UDS on the CAN network, and
- specific restrictions in the implementation of UDS on the CAN network.

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 14229-1, *Road vehicles — Unified diagnostic services (UDS) — Part 1: Specification and requirements*

ISO 14229-2, *Road vehicles — Unified diagnostic services (UDS) — Part 2: Session layer services*

ISO 15765-1, *Road vehicles — Diagnostic communication over Controller Area Network (DoCAN) — Part 1: General information and use case definition*

ISO 15765-2, *Road vehicles — Diagnostic communication over Controller Area Network (DoCAN) — Part 2: Transport protocol and network layer services*

ISO 15765-4, *Road vehicles — Diagnostic communication over Controller Area Network (DoCAN) — Part 4: Requirements for emissions-related systems*

3 Terms, definitions and abbreviated terms

3.1 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 14229-1, ISO 14229-2, ISO 15765-1, ISO 15765-2 and ISO 15765-4 apply.

3.2 Abbreviated terms

CF	consecutive frame
DA	destination address
DLC	data length code
FF	first frame
FC	flow control
ID	identifier
NA	network address
SA	source address
SF	single frame
SM	subnet mask
SOM	start of message
STRT	serviceToRespondTo
TA	target address
UDS	unified diagnostic services
USDT	unacknowledged segmented data transfer
UUDT	unacknowledged unsegmented data transfer

4 Conventions

This part of ISO 14229 is based on the conventions discussed in the OSI Service Conventions (ISO/IEC 10731:1994) as they apply for diagnostic services.

5 Document overview

Figure 1 illustrates the documents required to implement UDSONCAN.

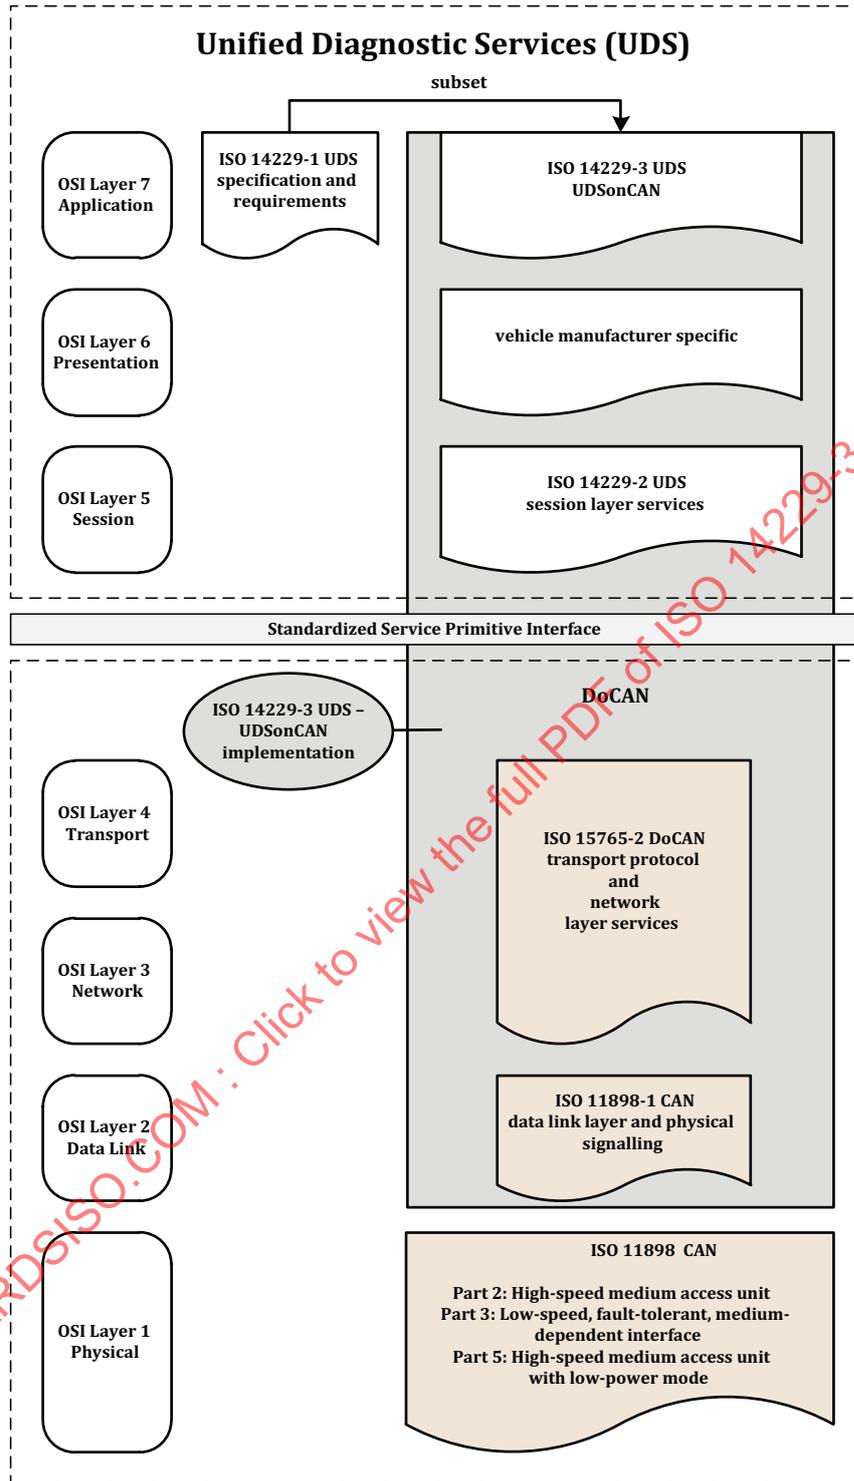


Figure 1 — UDSONCAN document reference according to OSI model

6 Unified diagnostic services implementation on CAN

6.1 General

This clause defines how the diagnostic services as defined in ISO 14229-1 apply to DoCAN. For each applicable service, the applicable sub-function and data parameters are defined.

NOTE The sub-function parameter definitions take into account that the most significant bit is used for the suppressPosRspMsgIndicationBit parameter as defined in ISO 14229-1.

6.2 UDS on CAN services overview

The purpose of Table 2 is to reference all ISO 14229-1 and ISO 14229-2 services as they are applicable for an implementation in ISO 14229-3, UDSONCAN. Table 2 contains the sum of all applicable services. Certain applications using this part of ISO 14229 to implement UDSONCAN may restrict the number of useable services and may categorize them in certain application areas/diagnostic sessions (default session, programming session, etc.).

Services in Table 2 that are marked “No CAN specific requirements” shall be implemented as defined in ISO 14229-1 and ISO 14229-2 with no additional restrictions. Services that are marked “CAN specific requirements” shall be implemented as defined by the subclause listed in the Table 2 entry.

Table 2 — Overview of applicable ISO 14229-1, Unified diagnostic services and data ranges

Diagnostic service name (ISO 14229-1)	Comment	Reference in this document
Diagnostic and Communication Management Functional Unit		
DiagnosticSessionControl	No CAN specific requirements	—
ECUReset	No CAN specific requirements	—
SecurityAccess	No CAN specific requirements	—
CommunicationControl	No CAN specific requirements	—
TesterPresent	No CAN specific requirements	—
SecuredData-Transmission	No CAN specific requirements	—
ControlDTCSetting	No CAN specific requirements	—
ResponseOnEvent	CAN specific requirements	see 6.3
LinkControl	No CAN specific requirements	—
Data Transmission Functional Unit		
ReadDataByIdentifier	No CAN specific requirements	—
ReadMemoryByAddress	No CAN specific requirements	—
ReadScalingDataByIdentifier	No CAN specific requirements	—
ReadDataByPeriodicIdentifier	CAN specific requirements	see 6.4
DynamicallyDefineDataIdentifier	No CAN specific requirements	—
WriteDataByIdentifier	No CAN specific requirements	—
WriteMemoryByAddress	No CAN specific requirements	—
ReadDTCInformation	No CAN specific requirements	—
ClearDiagnosticInformation	No CAN specific requirements	—
Data Transmission Functional Unit		
ReadDTCInformation	No CAN specific requirements	—
ClearDiagnosticInformation	No CAN specific requirements	—

Table 2 (continued)

Input/Output Control Functional Unit		
InputOutputControlByIdentifier	No CAN specific requirements	—
Remote Activation Of Routine Functional Unit		
RoutineControl	No CAN specific requirements	—
Upload/Download Functional Unit		
RequestDownload	No CAN specific requirements	—
RequestUpload	No CAN specific requirements	—
TransferData	No CAN specific requirements	—
RequestTransferExit	No CAN specific requirements	—
RequestFileTransfer	No CAN specific requirements	—

6.3 ResponseOnEvent (0x86) service DoCAN implementation requirements

In addition to the generic implementation requirements stated in ISO 14229-1 the following additional CAN specific implementation requirements shall apply.

While the ResponseOnEvent service is active, the server shall be able to process concurrent diagnostic request and response messages accordingly. This should be accomplished with a different serviceToRespondTo CAN Identifiers. If the same diagnostic request/response CAN Identifiers are used for diagnostic communication and the serviceToRespondTo-responses, the following restrictions shall apply:

- a) The server may ignore an incoming diagnostic request issued by the client that initiated the event, after an event has occurred and the serviceToRespondTo-response is in progress, until the serviceToRespondTo-response is completed. If another client issued the request, the server may or may not ignore the request, depending on the server's capabilities.
- b) When the client receives any response after sending a diagnostic request, the response shall be classified according to the possible serviceToRespondTo-responses and the expected diagnostic responses to the previously sent request.
 - 1) If the response is a serviceToRespondTo-response (one of the possible responses set up with ResponseOnEvent-service), the client shall repeat the request after the serviceToRespondTo-response has been received completely.
 - 2) If the response is ambiguous (i.e. the response could originate from the serviceToRespondTo initiated by an event or from the response to a diagnostic request), the client shall present the response both as a serviceToRespondTo-response and as the response to the diagnostic request. The client shall not repeat the request with the exception of NegativeResponseCode busyRepeatRequest (0x21) (see the negative response code definitions in ISO 14229-1).

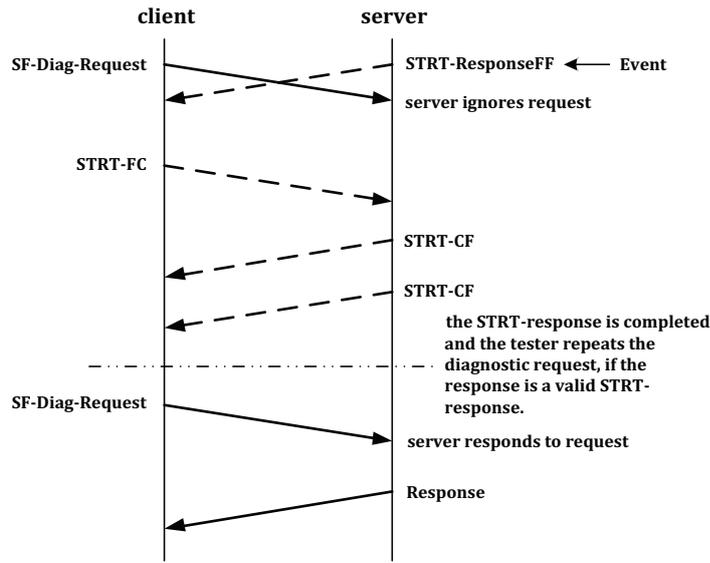


Figure 2 — Concurrent request when the event occurs

- c) When the specified event is detected, the server shall respond immediately with the appropriate serviceToRespondTo-response message. The immediate serviceToRespondTo-response message shall not disrupt any other diagnostic request or response transmission already in progress (i.e. the serviceToRespondTo-response shall be delayed until the current message transmission has been completed, see Figure 3).

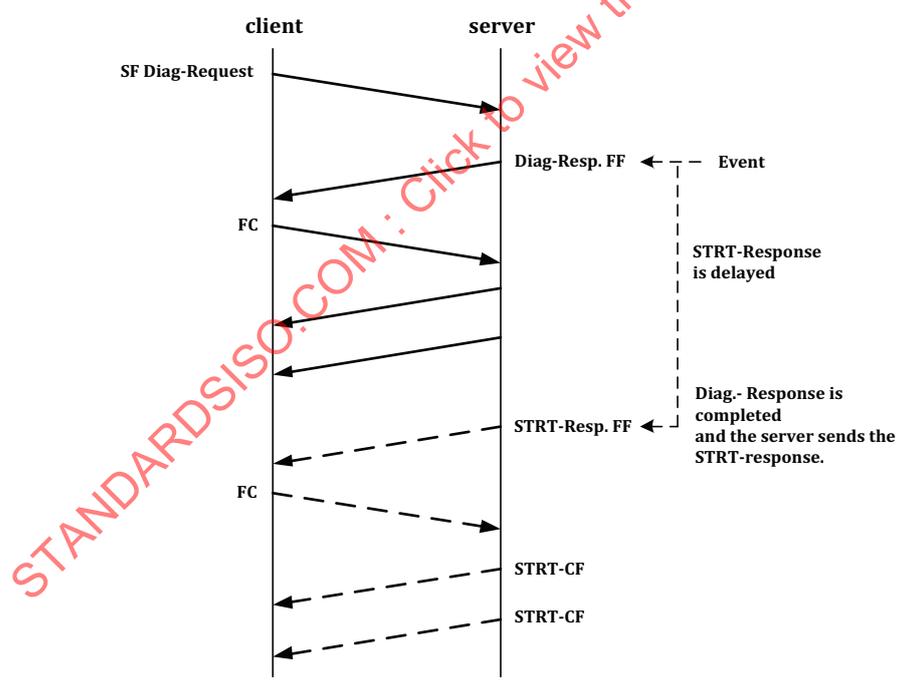


Figure 3 — Event occurrence during a message in progress

6.4 ReadDataByPeriodicIdentifier (0x2A) service

6.4.1 Periodic transmission response message

The ReadDataByPeriodicIdentifier service allows the client to request the periodic transmission of data record values from the server identified by one or more periodicDataIdentifiers. For service 0x2A implementation on DoCAN, the periodic transmission response message is supported according to ISO 14229-1.

The usage of the periodic transmission response message should consider a single data format being supported for the whole vehicle which may consist of other data links than CAN. E.g. if FlexRay is part of the electrical vehicle architecture in addition to CAN, the total DID data length shall not exceed the length limitations of the CAN protocol to ensure a single data format.

Table 3 describes the periodic transmission response message.

Table 3 — Periodic transmission — Requirements for response message mapping

Message type	Client request requirements	Server response requirements	Further server restrictions
UUDT uses a different CAN Identifier for periodic transmission	No restrictions	Only single-frame responses for periodic transmission Multi-frame responses to new (non-periodic transmission) requests are possible	The request for periodic transmission is processed as a regular diagnostic request and the response is sent via the network layer (as a USDT message with service identifier 0x6A).
			On receiving the N_USData.con that indicates the completion of the transmission of the positive response, the application starts an independent scheduler, which handles the periodic transmission.
			The scheduler in the server processes the periodic transmission as a single CAN frame response message in a bypass (i.e. writes the message directly to the CAN-controller/data link layer driver without using the network-layer).
			There is neither a protocol control information (PCI) nor a service identifier (Sid) included in the response message. Only the periodic identifier and corresponding data are included.

6.4.2 Periodic transmission response message handling

6.4.2.1 General

Due to the fact, that the periodic response message neither supports protocol control information nor the service identifier information (transport layer by-pass), the following service primitives need to be taken into account. The service primitives as defined below make use of the individual parameters as specified in ISO 15765-2:

6.4.2.2 N_UUData.request

The service primitive requests periodic transmission of < MessageData > with < Length > number of bytes from the sender to the receiver peer entities identified by the address information in N_SA and N_TA. Each time the N_UUData.request service is called, the transport/network layer shall signal the completion (or failure) of the message transmission to the service user by means of the issuing of a N_UUData.confirm service call:

```
N_UUData.request      (
                        N_SA,
                        N_TA,
                        <Length>,
                        <MessageData>
                        )
```

6.4.2.3 N_UUData.confirm

The N_UUData.confirm service is issued by the transport/network layer. The service primitive confirms the completion of a N_UUData.request service identified by the address information in N_SA and N_TA. The parameter < N_Result > provides the status of the service request (referring < N_Result > values defined in ISO 15765-2).

```
N_UUData.confirm      (
                        N_SA,
                        N_TA,
                        <N_Result>
                        )
```

NOTE Not all result values as defined in ISO 15765-2 apply for the response message transmission type UUDT.

6.4.2.4 N_UUData.indication

The N_UUData.indication service is issued by the transport/network layer. The service primitive delivers < MessageData > with < Length > bytes received from a peer protocol entity identified by the address information in N_SA and N_TA to the upper layer (see definition in ISO 15765-2).

The parameters < MessageData > and < Length > are only valid when the service primitive is indicated. In case of a reception error no indication will be generated. Therefore a < N_Result > parameter is not needed.

```
N_UUData.indication   (
                        N_SA,
                        N_TA,
                        <Length>,
                        <MessageData>
                        )
```

6.4.3 DoCAN frame format

6.4.3.1 General

Since the periodic transmission response message neither supports PCI information nor service identification information the protocol data unit format (PDU) differs to what is defined in ISO 15765-2. However, the CAN periodic transmission PDU format consists of three fields, as specified in Table 4.

Table 4 — Periodic transmission — PDU format

Address information	Length information	Data field
CAN Identifier C_AI	DLC	<MessageData>

6.4.3.2 Address information

The C_AI is used to identify the communicating peer entities for the periodic message PDUs. The exchange of network layer data are supported by normal addressing. The address information is mapped onto the CAN Identifier see ISO 15765-2.

6.4.3.3 Length Information

The DLC parameter specifies the number of data bytes transmitted in a CAN frame.


6.4.3.4 Data Field

The < MessageData > field contains periodic data information defined with a periodicDataIdentifier (PDID) and its corresponding dataRecords. The maximum size of the < MessageData > field shall be eight bytes.

6.4.4 Periodic transmission message flow

Figure 4 graphically illustrates the periodic response messages handling as specified above. As already stated in 6.4.2, the figure shows that the periodically transmitted response messages do not have any influence on the S3_{Server} timer of the server. For this figure it is assumed that a non-defaultSession has been activated prior to the configuration of the periodic scheduler (the ReadDataByPeriodicIdentifier service requires a non-defaultSession in order to be executed).

STANDARDSISO.COM : Click to view the full PDF of ISO 14229-3:2012

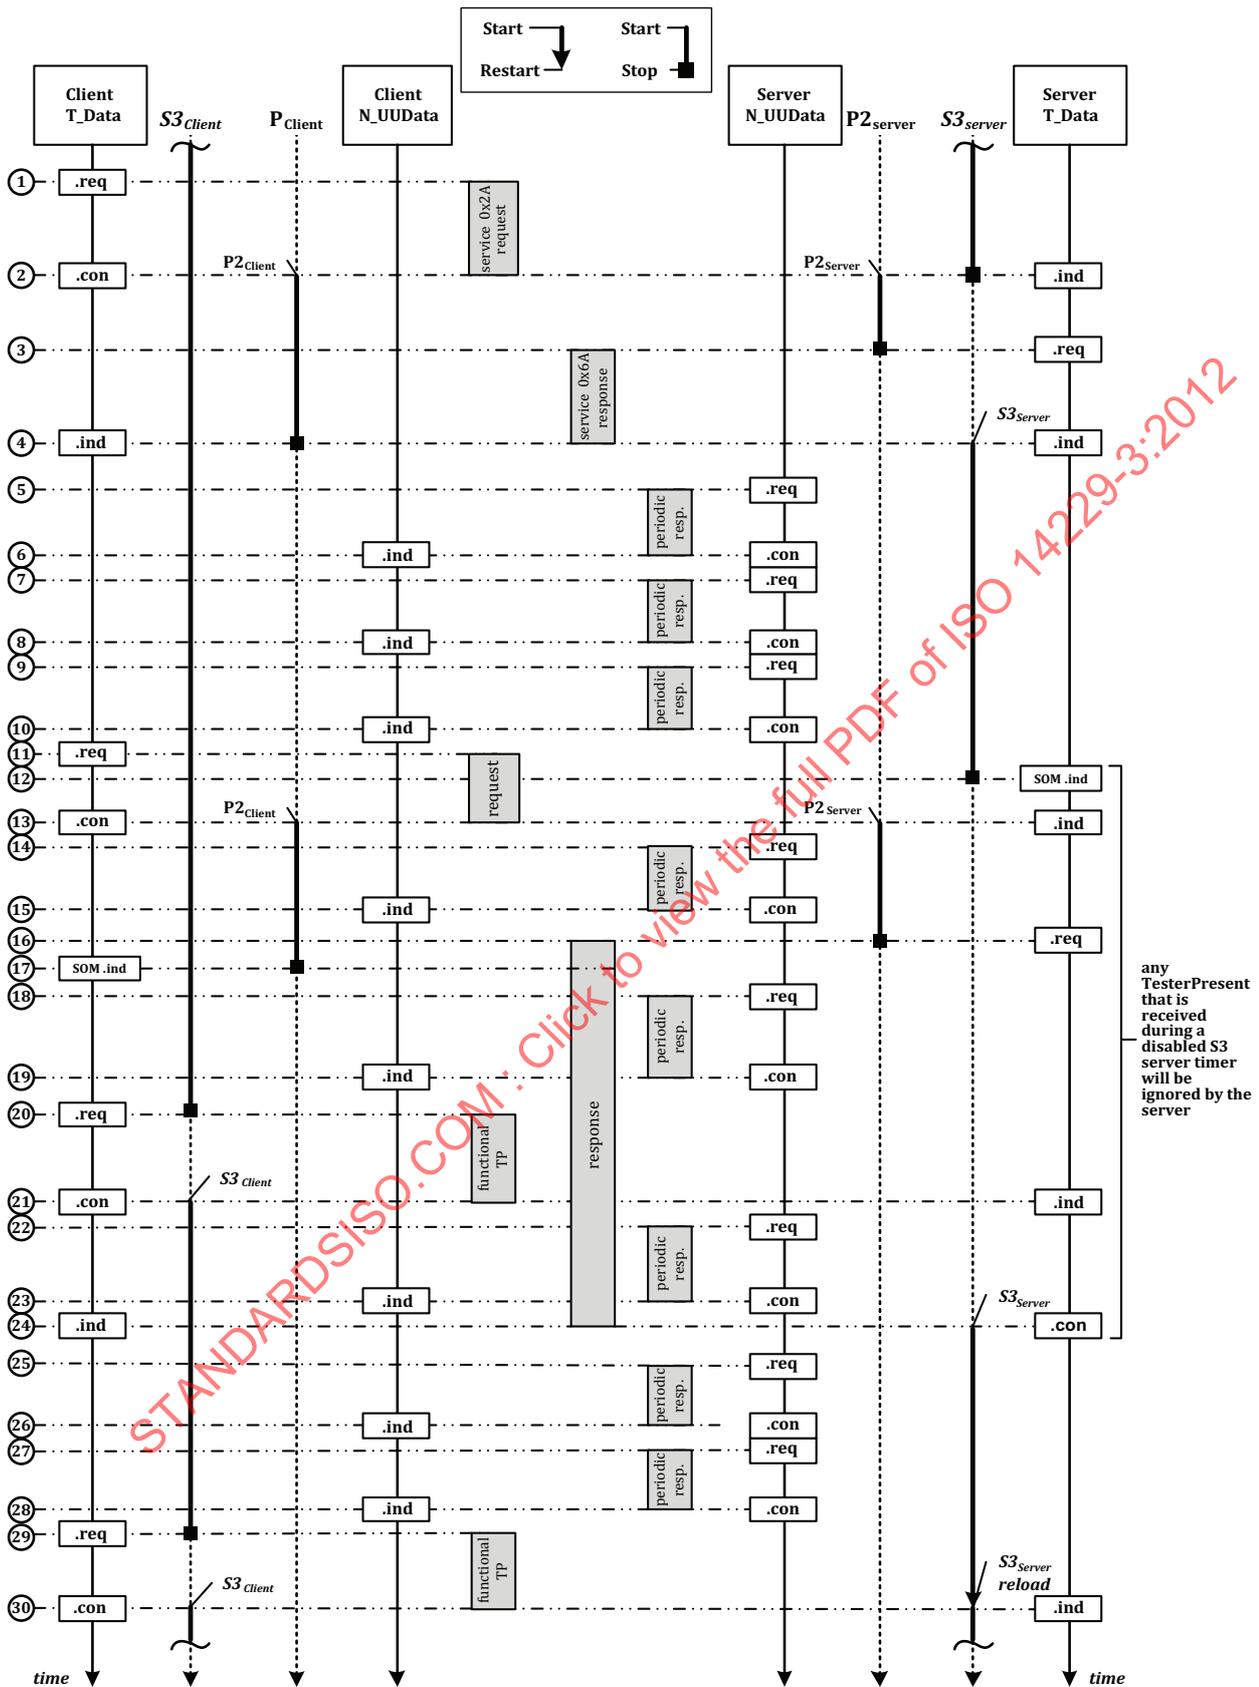

Key

- 1 **Client T_Data.req:** The diagnostic application of the client starts the transmission of the ReadDataByPeriodicIdentifier (0x2A) request message by issuing a T_Data.req to its transport/network layer. The transport/network layer transmits the ReadDataByPeriodicIdentifier (0x2A) request message to the server. The request message can either be a segmented or unsegmented message (depends on the number of periodicDataIdentifier contained in the request message). For the example given, it is assumed that the request message fits into a single frame
- 2 **Client T_Data.con:** The completion of the request message is indicated in the client via T_Data.con. Now the response timing as described in ISO 14229-2 applies

Server T_Data.ind: The completion of the request message is indicated in the server via the T_Data.ind. Now the response timing as described in ISO 14229-2 applies. Furthermore, the server stops its S3_{Server} timer
- 3 **Server T_Data.req:** It is assumed that the client requires a response from the server. The server shall transmit the ReadDataByPeriodicIdentifier positive response message to indicate that the request has been processed
- 4 **Server T_Data.con:** The completion of the transmission of the ReadDataByPeriodicIdentifier response message is indicated in the server via T_Data.con. Now the server restarts its S3_{Server} timer, which keeps the activated non-default session active as long as it does not time out. The transmission of the periodic messages will now be started

Client T_Data.ind: The reception of the response message is indicated in the client
- 5 **Server N_UUData.req:** The server starts to transmit the periodic response messages (single DoCAN frame messages). Each periodic message which neither includes any PCI information nor service identification uses a different source address than USDJ response messages. Therefore, the server issues a N_UUData.req each time a periodic message is transmitted independent of any other service currently processed by the server. This means that the transmission of the periodic response messages continues even when the server is in the process of handling another diagnostic service request. The transmission of the periodic response messages has no influence on the S3_{Server} timer
- 6 **Server N_UUData.con:** The completion of the transmission of the periodic response message is indicated in the server

Client N_UUData.ind: The completion of the reception of the periodic response message is indicated in the client
- 7 See (5)
- 8 See (6)
- 9 See (5)
- 10 See (6)
- 11 **Client T_Data.req:** The diagnostic application of the client starts the transmission of the next request message by issuing a T_Data.req to its transport/network layer. The transport/network layer transmits the request message to the server. The request message can either be an unsegmented or segmented message. For the example given, it is assumed that the request message is a multi-frame message
- 12 **Server T_Data_SOM.ind:** The start of a request message is indicated in the server via T_Data_SOM.ind while a periodic scheduler is active. The server does not stop the periodic scheduler for the duration of processing the received request message. This means that the server transmits further periodic messages for the duration of processing the diagnostic service. The client shall be aware of receiving these periodic response messages. Furthermore, any time the server is in the process of handling any diagnostic service it stops its S3_{Server} timer
- 13 **Client T_Data.con:** The completion of the request message is indicated in the client via T_Data.con. Now the response timing as described in ISO 14229-2 applies

Server T_Data.ind: The completion of the multi-frame request message is indicated in the server via the T_Data.ind. Now the response timing as described in ISO 14229-2 applies

14 See (5)

15 See (6)

16 **Server T_Data.req:** It is assumed that the client requires a response from the server. The server shall transmit the positive (or negative) response message via issuing a T_Data.req to its transport/network layer. In this example it is assumed that the response is a multi-frame message. While the multi-frame response message is transmitted by the transport/network layer, the periodic scheduler continues to transmit the periodic response messages

17 **Client T_Data_SOM.ind:** The start of the response message is indicated in the client

18 See (5)

19 See (6)

20 **Client T_Data.req:** When the S3_{Client} timer times out in the client, then the client transmits a functionally addressed TesterPresent (0x3E) request message to restart the S3_{Server} timer in the server

21 **Server T_Data.ind:** The server is in the process of transmitting the multi-frame response message of the previous request. Therefore, the server shall not act on the received TesterPresent (0x3E) request message, because its S3_{Server} timer is not yet re-activated

Client T_Data.con: The reception of the TesterPresent (0x3E) request message is indicated in the client

22 See (5)

23 See (6)

24 **Server T_Data.con:** When the diagnostic service is completely processed, then the server restarts its S3_{Server} timer. This means that any diagnostic service, including TesterPresent (0x3E), restarts the S3_{Server} timer. A diagnostic service is meant to be in progress any time between the start of the reception of the request message (T_Data_SOM.ind or T_Data.ind receive) and the completion of the transmission of the response message, where a response message is required or the completion of any action that is caused by the request, where no response message is required (point in time reached that would cause the start of the response message). This includes negative response messages including response code 0x78

Client T_Data.ind: The reception of the response message is indicated in the client

25 See (5)

26 See (6)

27 See (5)

28 See (6)

29 **Client T_Data.req:** When the S3_{Client} timer times out in the client (non-defaultSession active), then the client transmits a functionally addressed TesterPresent (0x3E) request message which does not require a response message, each time the S3_{Client} timer times out

30 **Client T_Data.con:** Upon the indication of the completed transmission of the TesterPresent (0x3E) request message via T_Data.con of its transport/network layer, the client once again starts its S3_{Client} timer. This means that the functionally addressed TesterPresent (0x3E) request message is sent on a periodic basis every time S3_{Client} times out

Server T_Data.ind: The reception of the TesterPresent (0x3E) request message is indicated in the server. The server shall re-activate the S3_{Server} timer

Figure 4 — Periodic transmission response message handling

7 Application layer requirements

7.1 Application layer services

This part of ISO 14229 uses the application layer services as defined in ISO 14229-1 for client-server based systems to perform functions such as test, inspection, monitoring, diagnosis or programming of on-board vehicle servers.

7.2 Application layer protocol

This part of ISO 14229 uses the application layer protocol as defined in ISO 14229-1.

7.3 Application layer timing

7.3.1 General

The subclauses specify the message timing parameters and how they apply to the client and the server.

7.3.2 Message timing parameter values

The application layer timing parameter values shall be in accordance with the definitions in ISO 14229-2.

7.3.3 Unsolicited response messages

Unsolicited messages are those transmitted by the server(s) based on either a periodic scheduler (see service ReadDataByPeriodicIdentifier in 6.4) or a configured trigger, such as a change of a DTC status or a dataIdentifier value change (see service ResponseOnEvent in 6.3).

Any unsolicited transmitted response message shall not reset the $S3_{Server}$ timer in the server. This avoids a diagnostic session keep-alive latch-up effect in the server for cases where a periodic message transmission is active or a timer-triggered event is configured in the server where the time interval between the events is smaller than $S3_{Server}$. The $S3_{Server}$ timer shall only be reset if the transmitted response message is the direct result of processing a request message and transmitting the final response message (such as the initial positive response that indicates that a request to schedule one or more periodicDataIdentifiers is performed successfully).

8 Presentation layer requirements

The presentation layer requirements are in the responsibility of the vehicle manufacturer.

9 Session layer requirements

The session layer requirements are specified in ISO 14229-2.

10 Transport/Network layer interface adaptation

10.1 General information

This part of ISO 14229 makes use of the network layer services defined in ISO 14229-2 for the transmission and reception of diagnostic messages. This subclause defines the mapping of the data link independent transport/network layer protocol data units (T_PDU) onto the CAN data link specific network layer protocol data units (N_PDU).

NOTE The transport/network layer services are used to perform the application layer and diagnostic session management timing.