
**Plastics — Epoxy resins — Determination
of 1,2-glycol content**

*Plastiques — Résines époxydes — Détermination de la teneur
en 1,2-glycol*

STANDARDSISO.COM : Click to view the full PDF of ISO 21048:2004



PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

STANDARDSISO.COM : Click to view the full PDF of ISO 21048:2004

© ISO 2004

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 21048 was prepared by Technical Committee ISO/TC 61, *Plastics*, Subcommittee SC 12, *Thermosetting materials*.

STANDARDSISO.COM : Click to view the full PDF of ISO 21048:2004

Introduction

In producing epoxy resin based on epichlorohydrin, impurities containing 1,2-glycol may be formed. Owing to the hydrophilic characteristics of 1,2-glycol, it is necessary to control the level of these impurities, since they could affect final properties such as electrical insulation. Additionally, these impurities could affect the speed of the curing reaction when using curing agents such as amines and acid anhydrides. Therefore, it is important to determine the 1,2-glycol content in epoxy resins for both resin manufacture and customer use.

STANDARDSISO.COM : Click to view the full PDF of ISO 21048:2004

Plastics — Epoxy resins — Determination of 1,2-glycol content

1 Scope

This International Standard specifies a method for the determination of the 1,2-glycol content in epoxy resins.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 3696, *Water for analytical laboratory use — Specification and test methods*

ISO 5725-2, *Accuracy (trueness and precision) of measurement methods and results — Part 2: Basic method for the determination of repeatability and reproducibility of a standard measurement method*

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

3.1

1,2-glycol

the 1,2-glycol group in epoxy resins, the content of which is expressed in moles per kilogram of the epoxy resin

NOTE 1 This moiety is chemically equivalent to two OH groups.


NOTE 2 Other possible nomenclatures are vicinal-OH group, 1,2-dihydroxyl group, α -glycol group.

4 Principle

1,2-glycol is determined on the basis of the following reactions:

1,2-glycol is oxidized to aldehyde compounds by an excess of orthoperiodic acid (reaction 1), then potassium iodide is added to the reaction mixture in the presence of sulfuric acid (reaction 2). The generated iodine is then titrated by standardized sodium thiosulfate solution (reaction 3). The 1,2-glycol content is calculated from the sodium thiosulfate consumption.

Reaction 1

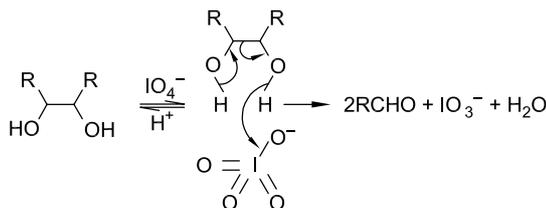

5 Reagents

Use reagents of recognized analytical grade, and water of grade 3 (as defined in ISO 3696) or better.

5.1 Chloroform.

WARNING — Chloroform is toxic. Avoid inhalation of its vapour. Prevent skin and eye contact. Work in a fume hood or in a well ventilated area. The threshold limit is 10 µg/g.

5.2 Methanol.

WARNING — Methanol is toxic. Avoid inhalation of its vapour. Prevent skin and eye contact. Work in a fume hood or in a well ventilated area. The threshold limit is 200 µg/g.

5.3 Benzyltrimethylammonium hydroxide, 40 % (by mass) solution in methanol.

5.4 Acetic acid.

5.5 Orthoperiodic acid.

5.6 Orthoperiodic acid, 0,2 mol/l solution.

5.6.1 Preparation

Weigh 2,70 g to 2,75 g of orthoperiodic acid into a 500 ml beaker (6.7) and dissolve in 450 ml of methanol (5.2), mixing with a magnetic stirrer (6.2). Place the pH electrode (6.3) into the solution. Neutralize the solution to pH 7,0 by adding benzyltrimethylammonium hydroxide solution (5.3) slowly with stirring. Add 15 ml of acetic acid (5.4) and 5 ml of water, using a 20 ml graduated glass cylinder (6.8), and, using a 500 ml measuring flask (6.9), fill to the mark with methanol.

5.7 Sulfuric acid, 10 % (by mass) solution.

Add 10 g of sulfuric acid dropwise to 90 g of water with stirring.

5.8 Potassium iodide, 20 % (by mass) solution.

Dissolve 20 g of potassium iodide in 80 g of water.

5.9 Anhydrous sodium carbonate.**5.10 Sodium thiosulfate, 0,1 mol/l solution.****5.10.1 Preparation**

Weigh out 26,0 g of sodium thiosulfate 5-hydrate and 0,20 g of anhydrous sodium carbonate (5.9). Add 1 litre of oxygen-free water and store in an airtight container. Allow to stand for 2 days before using.

5.10.2 Standardization

Heat the required amount of potassium iodate (reference material for volumetric analysis) at 130 °C for about 2 h, and allow it to cool in a desiccator. Weigh 0,9 g to 1,1 g of the dried KIO_3 to the nearest 0,1 mg into a 250 ml volumetric flask (6.9), dissolve in water and fill to the mark with water. Using a pipette, place 25 ml of the solution in a 300 ml conical flask (6.5). Add 2 g of potassium iodide and 2 ml of sulfuric acid (1+1) to the conical flask, stopper immediately, shake gently, and allow to stand for 5 min in the dark. As an indicator, add 0,5 ml of starch solution (5.11), and titrate with 0,1 mol/l sodium thiosulfate solution (5.10). Add another 0,5 ml of the starch solution when nearing the end point. Continue to titrate until the blue colour of the solution just disappears.

Separately, measure 25 ml of water (using a pipette) and 2 g of potassium iodide into a 300 ml conical flask (6.5), then add 2 ml of sulfuric acid (1+1), stopper immediately, shake gently, and allow to stand for 5 min in the dark. Carry out a blank titration by the same procedure as described, and use the result to correct the volume needed for the standardization titration.

5.10.3 Calculation of concentration

Calculate the concentration from the following equation:

$$c = \frac{a \times p}{0,003\,566\,7 \times (V_2 - V_1) \times 10\,000} \quad (1)$$

where

c is the concentration of the sodium thiosulfate solution, expressed in moles per litre;

a is the mass of potassium iodate, expressed in grams;

p is the purity of the potassium iodate, expressed in percent;

0,003 566 7 is the mass of potassium iodate equivalent to 1 ml of 0,1 mol/l sodium thiosulfate solution;

V_1 is the volume of sodium thiosulfate solution used in the titration, expressed in millilitres;

V_2 is the volume of sodium thiosulfate solution used in the blank titration, expressed in millilitres.

5.11 Starch solution, 1 % (by mass).

Dissolve 1 g of water-soluble starch in 99 g of hot water.

6 Apparatus

Usual laboratory apparatus, plus the following:

6.1 Analytical balance, accurate to 0,1 mg.**6.2 Magnetic stirrer**, equipped with a polytetrafluoroethylene-coated bar.

6.3 **pH-meter**, accurate to 0,1 pH-units, calibrated in advance, equipped with a glass combination electrode and electrode stand.

6.4 **Burette**, 50 ml.

6.5 **Conical flask**, 300 ml, with a ground-glass stopper.

6.6 **Pipettes**, 5 ml, 20 ml and 25 ml.

6.7 **Beaker**, 500 ml.

6.8 **Graduated glass cylinders**, 20 ml and 100 ml.

6.9 **Volumetric flasks**, 250 ml and 500 ml.

7 Procedure

7.1 Select the mass of the test portion in accordance with the expected 1,2-glycol content (see Table 1).

Table 1 — Mass of test portion

1,2-glycol content, w mol/kg	Mass of test portion g
$w < 0,01$	10
$0,01 \leq w < 0,05$	8
$0,05 \leq w < 0,1$	4
$0,1 \leq w < 0,2$	2
$0,2 \leq w$	1

7.2 Weigh the test portion to the nearest 0,1 mg into a 300 ml conical flask (6.5). Add 25 ml of chloroform (5.1) and warm the mixture to obtain a clear solution. Then cool to ambient temperature.

7.3 Using a pipette, add 25 ml of 0,2 mol/l orthoperiodic acid solution (5.6) to the conical flask. Wet a ground-glass stopper with water and stopper the conical flask tightly. Mix well and allow the reaction mixture to stand at room temperature for 2 h.

7.4 Add 100 ml of cold water to the conical flask and then stopper again. Mix vigorously, using a magnetic stirrer, for 30 s.

7.5 Wash the inside of the flask and the glass stopper with a small quantity of water. Using a pipette, add 5 ml of 10 % sulfuric acid solution (5.7).

7.6 Using a pipette, add 20 ml of 20 % potassium iodide solution (5.8).

7.7 Mix well for 30 s with a magnetic stirrer. Titrate with 0,1 mol/l sodium thiosulfate solution (5.10), with stirring. As an indicator, add about 1 ml of starch solution (5.11) when the colour of the solution becomes pale yellow which shows the end point is near.

7.8 Continue to titrate until the blue colour of the solution just disappears.

7.9 Carry out a blank test, following the same procedure and using the same reagents, but omitting the test portion.