

---

---

**Aerospace — Drives, internal, TORX®  
PARALOBE® driver bit — Geometrical  
definition, gaging and technical  
requirements**

*Aéronautique et espace — Empreintes, TORX® PARALOBE® embout  
d'entraînement — Définition géométrique, calibrage et exigences  
techniques*

STANDARDSISO.COM : Click to view the full PDF of ISO 4580:2021



STANDARDSISO.COM : Click to view the full PDF of ISO 4580:2021



**COPYRIGHT PROTECTED DOCUMENT**

© ISO 2021

All rights reserved. Unless otherwise specified, or required in the context of its implementation, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
CP 401 • Ch. de Blandonnet 8  
CH-1214 Vernier, Geneva  
Phone: +41 22 749 01 11  
Email: [copyright@iso.org](mailto:copyright@iso.org)  
Website: [www.iso.org](http://www.iso.org)

Published in Switzerland

# Contents

|                                                             | Page     |
|-------------------------------------------------------------|----------|
| Foreword.....                                               | iv       |
| Introduction.....                                           | v        |
| <b>1 Scope.....</b>                                         | <b>1</b> |
| <b>2 Normative references.....</b>                          | <b>1</b> |
| <b>3 Terms and definitions.....</b>                         | <b>1</b> |
| <b>4 Basic driver bit configuration.....</b>                | <b>1</b> |
| 4.1 General.....                                            | 1        |
| 4.2 Basic driver bit configuration dimensions — metric..... | 2        |
| 4.3 Basic driver bit configuration dimensions — inch.....   | 3        |
| 4.4 Driver bit designation.....                             | 4        |
| <b>5 Driver bit inspection.....</b>                         | <b>4</b> |
| 5.1 Driver bit gaging equipment.....                        | 4        |
| 5.2 Driver bit gaging procedure.....                        | 5        |
| 5.3 Driver bit inspection gage dimensions — metric.....     | 5        |
| 5.4 Driver bit inspection gage dimensions — inch.....       | 6        |
| <b>6 Driver bit torque test.....</b>                        | <b>6</b> |
| 6.1 Driver bit torque test apparatus.....                   | 6        |
| 6.2 Torque test fixture.....                                | 7        |
| 6.3 Torque wrench/torsion machine.....                      | 8        |
| <b>7 Driver bit torque test procedure.....</b>              | <b>8</b> |

STANDARDSISO.COM : Click to view the full PDF of ISO 4580:2021

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular, the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see [www.iso.org/directives](http://www.iso.org/directives)).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see [www.iso.org/patents](http://www.iso.org/patents)).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation of the voluntary nature of standards, the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT), see [www.iso.org/iso/foreword.html](http://www.iso.org/iso/foreword.html).

This document was prepared by Technical Committee ISO/TC 20, *Aircraft and space vehicles*, Subcommittee SC 4, *Aerospace fastener systems*.

Any feedback or questions on this document should be directed to the user's national standards body. A complete listing of these bodies can be found at [www.iso.org/members.html](http://www.iso.org/members.html).

## Introduction

The International Organization for Standardization (ISO) draws attention to the fact that it is claimed that compliance with this document may involve the use of a patent.

ISO takes no position concerning the evidence, validity and scope of this patent right.

The holder of this patent right has assured ISO that he/she is willing to negotiate licences under reasonable and non-discriminatory terms and conditions with applicants throughout the world. In this respect, the statement of the holder of this patent right is registered with ISO. Information may be obtained from the patent database available at [www.iso.org/patents](http://www.iso.org/patents).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights other than those in the patent database. ISO shall not be held responsible for identifying any or all such patent rights.

STANDARDSISO.COM : Click to view the full PDF of ISO 4580:2021

[STANDARDSISO.COM](https://standardsiso.com) : Click to view the full PDF of ISO 4580:2021

# Aerospace — Drives, internal, TORX® PARALOBE® driver bit — Geometrical definition, gaging and technical requirements

## 1 Scope

This document specifies basic dimensions, characteristics and engineering requirements for TORX® PARALOBE®<sup>1)</sup> driver bits used with aerospace fasteners.

## 2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 4579, *Aerospace — Drives, internal, TORX® PARALOBE® drive — Geometrical definition, gaging and technical requirements*

## 3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

ISO and IEC maintain terminology databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <https://www.iso.org/obp>
- IEC Electropedia: available at <http://www.electropedia.org/>

### 3.1

#### driver bit

tool to induce a torque into a fastener's recess (3.2)

### 3.2

#### recess


geometry in a fastener that allows attaching a tool in order to induce a torque to enable tightening and untightening of a fastener

## 4 Basic driver bit configuration

### 4.1 General

The basic driver bit configuration shall be in accordance with [Figure 1](#). Driver bits according to this document shall be used in conjunction with fasteners having an internal TORX® PARALOBE® drive according to ISO 4579.

1) TORX PARALOBE is the trademark of a product supplied by Acument Intellectual Properties, LLC, 6125 Eighteen Mile Road, Sterling Heights, MI 48314, USA. This information is given for the convenience of users of this document and does not constitute an endorsement by ISO of the products named. Equivalent products may be used if they can be shown to lead to the same results.

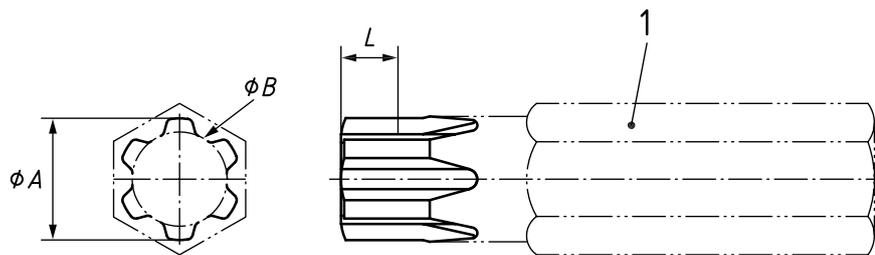

**Key**

- $\phi A$  configuration diameter (see Tables 1 and 2)
- $\phi B$  configuration inscribed diameter (see Tables 1 and 2)
- $L$  configuration length (see Tables 1 and 2)
- 1 driver bit marking

**Figure 1 — Basic driver bit configuration**

The drive size descriptor shall appear on surface of driver bit. The manufacturer's symbol shall also appear on the surface of driver bit.

EXAMPLE:

PARALOBE 25SI

**4.2 Basic driver bit configuration dimensions — metric**

**Table 1 — Driver bit dimensions — metric**

| Drive code | Drive size descriptor | $\phi A$                     | $\phi B$                               | $L$                                | Configuration torque |
|------------|-----------------------|------------------------------|----------------------------------------|------------------------------------|----------------------|
|            |                       | Configuration diameter<br>mm | Configuration inscribed diameter<br>mm | Configuration length<br>min.<br>mm | min.<br>N · m        |
| 001        | 1SI                   | 0,89                         | 0,64                                   | 0,38                               | 0,175                |
| 002        | 2SI                   | 1,02                         | 0,71                                   | 0,46                               | 0,256                |
| 003        | 3SI                   | 1,21                         | 0,84                                   | 0,53                               | 0,424                |
| 004        | 4SI                   | 1,37                         | 0,99                                   | 0,61                               | 0,662                |
| 005        | 5SI                   | 1,50                         | 1,10                                   | 0,64                               | 0,891                |
| 006        | 6SI                   | 1,80                         | 1,38                                   | 0,76                               | 1,65                 |
| 007        | 7SI                   | 2,10                         | 1,59                                   | 0,91                               | 2,51                 |
| 008        | 8SI                   | 2,44                         | 1,85                                   | 1,07                               | 4,01                 |
| 009        | 9SI                   | 2,64                         | 2,01                                   | 1,12                               | 5,11                 |
| 010        | 10SI                  | 2,90                         | 2,18                                   | 1,22                               | 6,69                 |
| 015        | 15SI                  | 3,45                         | 2,64                                   | 1,47                               | 11,6                 |
| 020        | 20SI                  | 4,08                         | 3,15                                   | 1,70                               | 19,5                 |
| 025        | 25SI                  | 4,69                         | 3,56                                   | 1,96                               | 28,9                 |
| 027        | 27SI                  | 5,27                         | 4,08                                   | 2,18                               | 42,4                 |
| 030        | 30SI                  | 5,84                         | 4,51                                   | 2,44                               | 57,6                 |
| 040        | 40SI                  | 7,02                         | 5,41                                   | 2,95                               | 99,9                 |
| 045        | 45SI                  | 8,27                         | 6,48                                   | 3,48                               | 167                  |
| 050        | 50SI                  | 9,35                         | 7,21                                   | 3,99                               | 237                  |

Table 1 (continued)

| Drive code | Drive size descriptor | $\varnothing A$              | $\varnothing B$                        | $L$                                | Configuration torque<br>min.<br>N · m |
|------------|-----------------------|------------------------------|----------------------------------------|------------------------------------|---------------------------------------|
|            |                       | Configuration diameter<br>mm | Configuration inscribed diameter<br>mm | Configuration length<br>min.<br>mm |                                       |
| 055        | 55SI                  | 11,86                        | 9,42                                   | 5,08                               | 504                                   |
| 060        | 60SI                  | 14,02                        | 10,92                                  | 6,10                               | 810                                   |
| 070        | 70SI                  | 16,45                        | 12,93                                  | 7,19                               | 1 320                                 |
| 080        | 80SI                  | 18,59                        | 14,43                                  | 8,18                               | 1 890                                 |
| 090        | 90SI                  | 21,12                        | 16,60                                  | 9,32                               | 2 810                                 |
| 100        | 100SI                 | 23,46                        | 18,45                                  | 10,36                              | 3 850                                 |
| 110        | 110SI                 | 25,36                        | 19,38                                  | 11,28                              | 4 700                                 |

### 4.3 Basic driver bit configuration dimensions — inch

Table 2 — Driver bit dimensions — inch<sup>a</sup>

| Drive code | Drive size descriptor | $\varnothing A$                | $\varnothing B$                          | $L$                                  | Configuration torque<br>min.<br>lbf · in |
|------------|-----------------------|--------------------------------|------------------------------------------|--------------------------------------|------------------------------------------|
|            |                       | Configuration diameter<br>inch | Configuration inscribed diameter<br>inch | Configuration length<br>min.<br>inch |                                          |
| 001        | 1SI                   | 0.035                          | 0.025                                    | 0.015                                | 1.55                                     |
| 002        | 2SI                   | 0.040                          | 0.028                                    | 0.018                                | 2.27                                     |
| 003        | 3SI                   | 0.048                          | 0.033                                    | 0.021                                | 3.75                                     |
| 004        | 4SI                   | 0.054                          | 0.039                                    | 0.024                                | 5.86                                     |
| 005        | 5SI                   | 0.059                          | 0.044                                    | 0.025                                | 7.89                                     |
| 006        | 6SI                   | 0.071                          | 0.055                                    | 0.030                                | 14.6                                     |
| 007        | 7SI                   | 0.083                          | 0.063                                    | 0.036                                | 22.2                                     |
| 008        | 8SI                   | 0.096                          | 0.073                                    | 0.042                                | 35.5                                     |
| 009        | 9SI                   | 0.104                          | 0.079                                    | 0.044                                | 45.2                                     |
| 010        | 10SI                  | 0.114                          | 0.086                                    | 0.048                                | 59.2                                     |
| 015        | 15SI                  | 0.136                          | 0.104                                    | 0.058                                | 103                                      |
| 020        | 20SI                  | 0.161                          | 0.124                                    | 0.067                                | 173                                      |
| 025        | 25SI                  | 0.185                          | 0.140                                    | 0.077                                | 256                                      |
| 027        | 27SI                  | 0.208                          | 0.161                                    | 0.086                                | 375                                      |
| 030        | 30SI                  | 0.230                          | 0.178                                    | 0.096                                | 510                                      |
| 040        | 40SI                  | 0.277                          | 0.213                                    | 0.116                                | 884                                      |
| 045        | 45SI                  | 0.326                          | 0.255                                    | 0.137                                | 1 480                                    |
| 050        | 50SI                  | 0.368                          | 0.284                                    | 0.157                                | 2 100                                    |
| 055        | 55SI                  | 0.467                          | 0.371                                    | 0.200                                | 4 460                                    |
| 060        | 60SI                  | 0.552                          | 0.430                                    | 0.240                                | 7 170                                    |
| 070        | 70SI                  | 0.648                          | 0.509                                    | 0.283                                | 11 700                                   |
| 080        | 80SI                  | 0.732                          | 0.568                                    | 0.322                                | 16 700                                   |
| 090        | 90SI                  | 0.832                          | 0.654                                    | 0.367                                | 24 900                                   |

<sup>a</sup> The dimensions in this table are rounded. Therefore the general formula for converting inches into mm cannot be used.

Table 2 (continued)


| Drive code | Drive size descriptor | $\varnothing A$                | $\varnothing B$                          | $L$                                  | Configuration torque |
|------------|-----------------------|--------------------------------|------------------------------------------|--------------------------------------|----------------------|
|            |                       | Configuration diameter<br>inch | Configuration inscribed diameter<br>inch | Configuration length<br>min.<br>inch | min.<br>lbf · in     |
| 100        | 100SI                 | 0.924                          | 0.727                                    | 0.408                                | 34 100               |
| 110        | 110SI                 | 0.999                          | 0.763                                    | 0.444                                | 41 600               |

<sup>a</sup> The dimensions in this table are rounded. Therefore the general formula for converting inches into mm cannot be used.

4.4 Driver bit designation


The driver bit designation shall be as shown in the following example:

ISO 4580-025

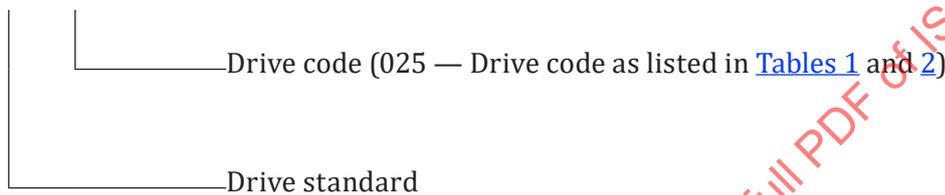

5 Driver bit inspection

5.1 Driver bit gaging equipment

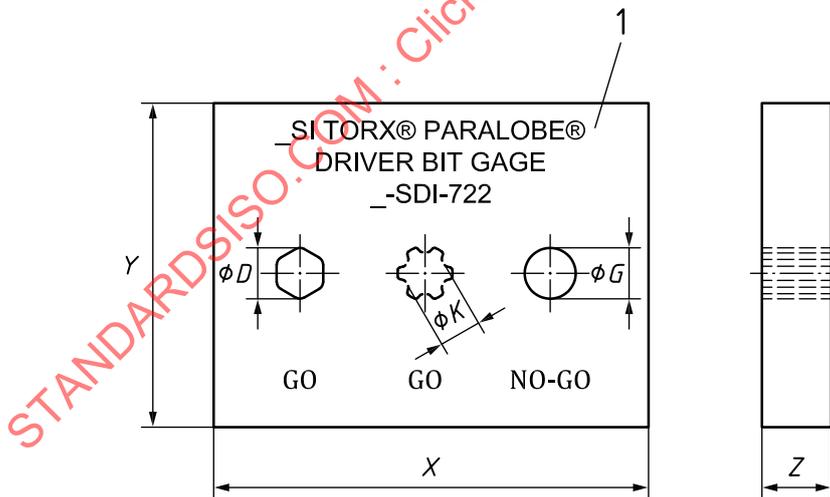

Key

- X gage body length (see Tables 3 and 4)
- Y gage body width (see Tables 3 and 4)
- Z gage body thickness (see Tables 3 and 4)
- $\varnothing D$  configuration circumscribed diameter go gage (see Tables 3 and 4)
- $\varnothing K$  configuration inscribed diameter go gage (see Tables 3 and 4)
- $\varnothing G$  configuration circumscribed diameter no-go gage (see Tables 3 and 4)
- 1 gage identification marking

Figure 2 — Driver bit inspection gage

The driver bit inspection gage identification markings shall appear on surface of gage along with drive size descriptor and gage series number.

EXAMPLE:

25SI TORX® PARALOBE®

Driver bit gage

25-SDI-722

## 5.2 Driver bit gaging procedure

The driver bit configuration dimensions shall be inspected with the go, no-go gages specified in [Figure 2](#). The driver bit body dimensions shall be appropriate for the application as defined in the applicable military standards, industry standards or manufacturer's data. Unless otherwise specified, the driver bit shall be in accordance with the requirements of industry standards.

Driver bit inspection gage dimensions are listed in [Tables 3](#) and [4](#).

The driver bit configuration length ( $L$ ) shall be measured with a calliper or other appropriate method.

## 5.3 Driver bit inspection gage dimensions — metric

Table 3 — Driver bit inspection gage dimensions — metric

| Drive size descriptor | Gage series number | $\varnothing D$<br>mm | $\varnothing K$<br>mm | $\varnothing G$<br>mm | $X$<br>mm | $Y$<br>mm | $Z$<br>mm |
|-----------------------|--------------------|-----------------------|-----------------------|-----------------------|-----------|-----------|-----------|
| 1SI                   | 01-SDI-722         | 0,92                  | 0,67                  | 0,86                  | 50,80     | 38,10     | 6,35      |
| 2SI                   | 02-SDI-722         | 1,05                  | 0,74                  | 0,99                  | 50,80     | 38,10     | 6,35      |
| 3SI                   | 03-SDI-722         | 1,25                  | 0,87                  | 1,19                  | 50,80     | 38,10     | 6,35      |
| 4SI                   | 04-SDI-722         | 1,40                  | 1,02                  | 1,34                  | 50,80     | 38,10     | 6,35      |
| 5SI                   | 05-SDI-722         | 1,53                  | 1,15                  | 1,47                  | 50,80     | 38,10     | 6,35      |
| 6SI                   | 06-SDI-722         | 1,83                  | 1,43                  | 1,77                  | 50,80     | 38,10     | 6,35      |
| 7SI                   | 07-SDI-722         | 2,14                  | 1,63                  | 2,08                  | 50,80     | 38,10     | 6,35      |
| 8SI                   | 08-SDI-722         | 2,47                  | 1,88                  | 2,41                  | 50,80     | 38,10     | 6,35      |
| 9SI                   | 09-SDI-722         | 2,67                  | 2,04                  | 2,61                  | 50,80     | 38,10     | 6,35      |
| 10SI                  | 10-SDI-722         | 2,93                  | 2,21                  | 2,87                  | 50,80     | 38,10     | 7,92      |
| 15SI                  | 15-SDI-722         | 3,48                  | 2,67                  | 3,42                  | 50,80     | 38,10     | 7,92      |
| 20SI                  | 20-SDI-722         | 4,12                  | 3,18                  | 4,06                  | 50,80     | 38,10     | 7,92      |
| 25SI                  | 25-SDI-722         | 4,75                  | 3,61                  | 4,65                  | 50,80     | 38,10     | 7,92      |
| 27SI                  | 27-SDI-722         | 5,33                  | 4,14                  | 5,23                  | 50,80     | 38,10     | 7,92      |
| 30SI                  | 30-SDI-722         | 5,89                  | 4,57                  | 5,79                  | 50,80     | 38,10     | 7,92      |
| 40SI                  | 40-SDI-722         | 7,09                  | 5,46                  | 6,99                  | 63,50     | 38,10     | 9,53      |
| 45SI                  | 45-SDI-722         | 8,33                  | 6,53                  | 8,23                  | 63,50     | 38,10     | 9,53      |
| 50SI                  | 50-SDI-722         | 9,40                  | 7,26                  | 9,30                  | 63,50     | 38,10     | 9,53      |
| 55SI                  | 55-SDI-722         | 11,94                 | 9,50                  | 11,78                 | 63,50     | 38,10     | 9,53      |
| 60SI                  | 60-SDI-722         | 14,10                 | 11,00                 | 13,94                 | 88,90     | 50,80     | 12,70     |
| 70SI                  | 70-SDI-722         | 16,54                 | 13,01                 | 16,38                 | 88,90     | 50,80     | 12,70     |
| 80SI                  | 80-SDI-722         | 18,67                 | 14,51                 | 18,51                 | 88,90     | 50,80     | 12,70     |
| 90SI                  | 90-SDI-722         | 21,21                 | 16,69                 | 21,05                 | 88,90     | 50,80     | 12,70     |
| 100SI                 | 100-SDI-722        | 23,55                 | 18,55                 | 23,39                 | 101,60    | 50,80     | 12,70     |

Table 3 (continued)

| Drive size descriptor | Gage series number | $\varnothing D$<br>mm | $\varnothing K$<br>mm | $\varnothing G$<br>mm | X<br>mm | Y<br>mm | Z<br>mm |
|-----------------------|--------------------|-----------------------|-----------------------|-----------------------|---------|---------|---------|
| 110SI                 | 110-SDI-722        | 25,45                 | 19,46                 | 25,29                 | 101,60  | 50,80   | 12,70   |

## 5.4 Driver bit inspection gage dimensions — inch

Table 4 — Driver bit inspection gage dimensions — inch<sup>a</sup>

| Drive size descriptor | Gage series number | $\varnothing D$<br>inch | $\varnothing K$<br>inch | $\varnothing G$<br>inch | X<br>inch | Y<br>inch | Z<br>inch |
|-----------------------|--------------------|-------------------------|-------------------------|-------------------------|-----------|-----------|-----------|
| 1SI                   | 01-SDI-722         | 0.036                   | 0.026                   | 0.034                   | 2.000     | 1.500     | 0.250     |
| 2SI                   | 02-SDI-722         | 0.041                   | 0.029                   | 0.039                   | 2.000     | 1.500     | 0.250     |
| 3SI                   | 03-SDI-722         | 0.049                   | 0.034                   | 0.047                   | 2.000     | 1.500     | 0.250     |
| 4SI                   | 04-SDI-722         | 0.055                   | 0.040                   | 0.053                   | 2.000     | 1.500     | 0.250     |
| 5SI                   | 05-SDI-722         | 0.060                   | 0.045                   | 0.058                   | 2.000     | 1.500     | 0.250     |
| 6SI                   | 06-SDI-722         | 0.072                   | 0.056                   | 0.070                   | 2.000     | 1.500     | 0.250     |
| 7SI                   | 07-SDI-722         | 0.084                   | 0.064                   | 0.082                   | 2.000     | 1.500     | 0.250     |
| 8SI                   | 08-SDI-722         | 0.097                   | 0.074                   | 0.095                   | 2.000     | 1.500     | 0.250     |
| 9SI                   | 09-SDI-722         | 0.105                   | 0.080                   | 0.103                   | 2.000     | 1.500     | 0.250     |
| 10SI                  | 10-SDI-722         | 0.115                   | 0.087                   | 0.113                   | 2.000     | 1.500     | 0.312     |
| 15SI                  | 15-SDI-722         | 0.137                   | 0.105                   | 0.135                   | 2.000     | 1.500     | 0.312     |
| 20SI                  | 20-SDI-722         | 0.162                   | 0.125                   | 0.160                   | 2.000     | 1.500     | 0.312     |
| 25SI                  | 25-SDI-722         | 0.187                   | 0.142                   | 0.183                   | 2.000     | 1.500     | 0.312     |
| 27SI                  | 27-SDI-722         | 0.210                   | 0.163                   | 0.206                   | 2.000     | 1.500     | 0.312     |
| 30SI                  | 30-SDI-722         | 0.232                   | 0.180                   | 0.228                   | 2.000     | 1.500     | 0.312     |
| 40SI                  | 40-SDI-722         | 0.279                   | 0.215                   | 0.275                   | 2.500     | 1.500     | 0.375     |
| 45SI                  | 45-SDI-722         | 0.328                   | 0.257                   | 0.324                   | 2.500     | 1.500     | 0.375     |
| 50SI                  | 50-SDI-722         | 0.370                   | 0.286                   | 0.366                   | 2.500     | 1.500     | 0.375     |
| 55SI                  | 55-SDI-722         | 0.470                   | 0.374                   | 0.464                   | 2.500     | 1.500     | 0.375     |
| 60SI                  | 60-SDI-722         | 0.555                   | 0.433                   | 0.549                   | 3.500     | 2.000     | 0.500     |
| 70SI                  | 70-SDI-722         | 0.651                   | 0.512                   | 0.645                   | 3.500     | 2.000     | 0.500     |
| 80SI                  | 80-SDI-722         | 0.735                   | 0.571                   | 0.729                   | 3.500     | 2.000     | 0.500     |
| 90SI                  | 90-SDI-722         | 0.835                   | 0.657                   | 0.829                   | 3.500     | 2.000     | 0.500     |
| 100SI                 | 100-SDI-722        | 0.927                   | 0.730                   | 0.921                   | 4.000     | 2.000     | 0.500     |
| 110SI                 | 110-SDI-722        | 1.002                   | 0.766                   | 0.996                   | 4.000     | 2.000     | 0.500     |

<sup>a</sup> The dimensions in this table are rounded. Therefore the general formula for converting inches into mm cannot be used.

## 6 Driver bit torque test

### 6.1 Driver bit torque test apparatus

The torque test apparatus shall be capable of maintaining alignment of the driver bit axis and torque test fixture configuration axis, ensuring non-rotation of the torque test fixture, applying a specified end load and apply torque only, and avoiding applying a bending moment on the driver bit. The apparatus shall not resist any tendency of the driver bit to cam out of the torque test fixture configuration during the test.