

INTERNATIONAL
STANDARD

ISO
8608

First edition
1995-09-01

**Mechanical vibration — Road surface
profiles — Reporting of measured data**

*Vibrations mécaniques — Profils de routes — Méthode de présentation
des résultats de mesures*

STANDARDSISO.COM : Click to view the full PDF of ISO 8608:1995



Reference number
ISO 8608:1995(E)

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

International Standard ISO 8608 was prepared by Technical Committee ISO/TC 108, *Mechanical vibration and shock*, Subcommittee SC 2, *Measurement and evaluation of mechanical vibration and shock as applied to machines, vehicles and structures*.

Annexes A, B, C, D and E of this International Standard are for information only.

© ISO 1995

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the publisher.

International Organization for Standardization
Case Postale 56 • CH-1211 Genève 20 • Switzerland

Printed in Switzerland

Introduction

The purpose of this International Standard is to facilitate the compilation and comparison of measured vertical road profile data from various sources. It therefore specifies a uniform method of reporting data from one-track and multiple-track measurements.

It specifies how measurements shall be reported, but not how the measurements shall be made. The measuring equipment may influence the results of the measurement; therefore certain characteristics of the measuring system shall be reported.

Annex A is an example of a report which meets the minimum requirements of this International Standard.

Annex B gives means of approximately characterizing specific road profiles in order to facilitate the division of road profiles into general classifications. A general classification is also given. A curve-fitting method is suggested for characterizing spectral data.

Annex C provides general guidance for the use of road profile statistical data for simulation studies and for related studies such as evaluation of comfort, suspensions and road profiles.

Annex D discusses the processing of the Power Spectral Density (PSD) with the Fast Fourier Transform (FFT) technique. A discussion on the statistical precision is also given.

This page intentionally left blank

STANDARDSISO.COM : Click to view the full PDF of ISO 8608:1995

Mechanical vibration — Road surface profiles — Reporting of measured data

1 Scope

This International Standard specifies a uniform method of reporting measured vertical road profile data for either one-track or multiple-track measurements.

It applies to the reporting of measured vertical profile data taken on roads, streets and highways, and on off-road terrain. It does not apply to rail-track data. Measurement and processing equipment and methods are not included.

2 Normative references

The following standards contain provisions which, through reference in this text, constitute provisions of this International Standard. At the time of publication, the editions indicated were valid. All standards are subject to revision, and parties to agreements based on this International Standard are encouraged to investigate the possibility of applying the most recent editions of the standards indicated below. Members of IEC and ISO maintain registers of currently valid International Standards.

ISO 2041:1990, *Vibration and shock — Vocabulary*.

IEC 1260:—¹⁾, *Electroacoustics — Octave-band and fractional-octave-band filters*.

3 Definitions

For the purposes of this International Standard, the definitions given in ISO 2041 and the following definitions apply.

3.1 spatial frequency: Reciprocal of the wavelength. It is expressed in cycles per metre.

3.2 Power Spectral Density (PSD): The limiting mean-square value of a signal per unit frequency bandwidth. For a one-sided spectrum, the area located between the graphic plot and the horizontal axis in a linear plot should be equal to the variance (σ^2) of the original signal for the evaluated frequency range. This leads to a doubling of the spectral amplitude when the calculation process is only estimating the spectrum for positive frequencies.

3.3 displacement PSD: PSD of the vertical road profile displacement.

3.4 velocity PSD: PSD of the rate of change of the vertical road profile displacement per unit distance travelled (slope of the vertical road profile).

3.5 acceleration PSD: PSD of the rate of change of the slope of the vertical road profile per unit distance travelled.

3.6 decolouring: Procedure to eliminate the influence of the transfer function of the measuring system on the PSD, i.e. the raw PSD should be decoloured before any further processing by dividing it by the square of the modulus of the measuring equipment transfer function.

3.7 smoothing: An averaging process in which a data block is shifted and averaged.

NOTE 1 In this International Standard "unsmoothed PSD" means the PSD as calculated from the measured data, i.e. with the bandwidths used in or following from the calculations and which are different from those indicated in table 2. The term "smoothed PSD" is the PSD which is obtained after using the averaging process described in 5.1.2.

1) To be published. (Revision of IEC 225:1966)

4 Symbols

See table 1.

Table 1 — Symbols

Symbol	Description	Unit
B_e	Frequency resolution	cycles/m
f	Time frequency	Hz
$G_d(.)$	Displacement PSD	m^3
$G_v(.)$	Velocity PSD	m
$G_a(.)$	Acceleration PSD	m^{-1}
$G_1(.)$	PSD of track 1	—
$G_2(.)$	PSD of track 2	—
$G_{12}(.)$	Cross spectrum between tracks 1 and 2	—
l	Wheelbase	m
n	Spatial frequency	cycles/m
s	Track width	m
t	Time	s
v	Vehicle speed	m/s
y^2	Coherence function	—
λ	Wavelength	m
ω	Angular frequency ($= 2\pi f$)	rad/s
Ω	Angular spatial frequency ($= 2\pi n$)	rad/m

NOTE — The indication (.) means that the parameter of the function can be spatial frequency (n) or angular spatial frequency (Ω).

5 Uniform method of reporting

5.1 One-track data

5.1.1 Description of the road profile

The road profile shall be described by one or both of the following two methods, with preference for the first, the displacement PSD.

The reporting of the non-smoothed data is always required.

5.1.1.1 First method — Displacement PSD: $G_d(.)$

The road profile shall be described by the PSD of its vertical displacement. The report shall include the displacement PSD *versus* spatial frequency, both on logarithmic axes. The dimensions are metres cubed *versus* reciprocal metres.

Two scales shall be given on the ordinate, one for $G_d(n)$ and one for $G_d(\Omega)$. Both n and Ω scales shall be indicated in the abscissa. The grid, however, shall only be drawn for $G_d(n)$ and n .

5.1.1.2 Second method — Acceleration PSD: $G_a(.)$

The acceleration PSD is an allowed alternative method of reporting data.

In this case, the road profile shall be described as the PSD of its acceleration in terms of the rate of change of the slope of the road surface per unit distance travelled. The dimension of the PSD shall be in reciprocal metres.

The scales shall be logarithmic on both axes. Two scales shall be given on the ordinate, one for $G_a(n)$ and one for $G_a(\Omega)$. On the abscissa both n and Ω shall be indicated. The grid, however, shall only be drawn for $G_a(n)$ and n .

The relationship between the two reporting methods is given by

$$G_a(n) = (2\pi n)^4 \cdot G_d(n)$$

$$G_a(\Omega) = \Omega^4 \cdot G_d(\Omega)$$

5.1.1.3 Spatial frequency range

The reported PSD shall be restricted between the limits allowed by the measuring equipment. For the report the user may select any spatial frequency range appropriate to his particular road surface, problem and product.

NOTES

2 Figure C.1 gives the relationship between the vehicle speed, the spatial frequency and the time frequency. Knowledge of the frequency and speed characteristics for a given class of vehicles makes it possible to choose the useful limits for that class of vehicle (for example, on- or off-road vehicles).

3 For the lower limit, the spatial frequency need not in general be measured lower than 0,01 cycles/m for on-road vehicles and 0,05 cycles/m for off-road vehicles.

4 The enveloping effect of the tyre acts as a low-pass filter for the road vibration input to the vehicle. This effect depends on the size and construction of the tyre. For general on-road measurements, this results in a recommended upper limit of 10 cycles/m. Of course for suspension vibration purposes, the interesting upper limit depends on the maximum allowed speed on the particular road. For noise purposes, the interesting upper limit may be much higher, and may go as high as 1 000 cycles/m.

5 Due to the tyre width there is also an enveloping effect in the lateral direction. This means that for vibration purposes the mean of the footprint is usually measured. The width depends on the problem (for example, vibration, noise) and the product (for example, motorcycle tyres, truck

tyres). For general on-road measurements not intended for a specific product, a track of about 100 mm wide is often used for vibration purposes. For noise purposes, a point measurement is often used.

The measured surface depends on the measuring equipment, which has a certain smoothing effect. This equipment is to be reported (see 5.3.4.2.1).

6 For off-road measurements, care should be taken when interpreting the high frequencies. For soft (for example, sandy) surfaces, short undulations could be flattened by the wheel load and filtered out. For hard (for example, stone) surfaces, however, only the enveloping effect of the tyre acts as a filter. In this situation the surface is to be described accurately in the data sheet (see 5.3.4.3.2).

7 Annex B gives recommended methods for the characterization of the road profile and for the fitting of the measured data.

5.1.2 Presentation of the smoothed power spectral density

When the PSDs are calculated with a constant bandwidth method, their representation in a log-log diagram will give an appearance or visual impression at high frequencies which over-emphasizes the fluctuations of the PSD generated by the real power distribution and by the statistical noise.

For this reason, the PSD shall also be represented in a smoothed form, i.e. by the mean PSD in the following frequency bands:

- octave bandwidth from the lowest calculated frequency (except zero) up to a centre frequency of 0,031 2 cycles/m (0,196 3 rad/m);
- third-octave bands from the last octave band up to a centre frequency of 0,25 cycles/m (1,570 8 rad/m);
- the rest, twentieth-octave bands up to the highest calculated frequency.

The centre frequencies to be used for the calculation of the smoothed PSD are given in table 2.

The mean PSD in a defined band should be calculated in the following way:

$$G_s(i) = \frac{[(n_L + 0,5) \cdot B_e - n_l(i)] G(n_l)}{n_h(i) - n_l(i)}$$

$$+ \frac{\sum_{j=n_l+1}^{n_h-1} G(j) \cdot B_e}{n_h(i) - n_l(i)}$$

$$+ \frac{[n_h(i) - (n_H - 0,5) \cdot B_e] \cdot G(n_H)}{n_h(i) - n_l(i)}$$

where

$G_s(i)$ is smoothed PSD in smoothing band i ;

$$n_H = \text{INT} \left(\frac{n_h(i)}{B_e} + 0,5 \right) \quad (n_h: \text{see table 2});$$

$$n_L = \text{INT} \left(\frac{n_l(i)}{B_e} + 0,5 \right) \quad (n_l: \text{see table 2}).$$

The other symbols are as defined in table 1.

The first and the third terms of the right side of the equation calculate respectively the parts of the original band n_L and n_H , in the calculated smoothed band i .

If this scheme cannot be followed, due to the calculations, the differences shall be noted in the report.

The same rules shall be followed when the smoothing is to be done in angular spatial frequency.

The same rules shall be followed for analog computation.

A small and easy supplementary calculation following the processing of the smoothed PSD leads to the characterization of the road profile as described in annex B.

5.2 Multiple-track data

The multiple-track road profile data shall be described as the PSD curves of each track as described in 5.1, and their relationship curves expressed as their coherence function

$$y^2 = \frac{G_{12}(.)^2}{G_1(.) \cdot G_2(.)}$$

When more than two tracks are measured, the most travelled track near the edge of the road shall be taken as the reference track for the calculation of coherence functions.

The curve shall be smoothed as described in 5.1.2.

5.3 Report

The report shall contain one or more curve sheets and general information.

5.3.1 One-track data curve sheet

The curve sheet for one-track data shall contain the non-smoothed PSD and the smoothed PSD. When

the information is given on one sheet, the separate curves should be carefully differentiated.

The PSD curve sheet shall also include the information given in 5.3.3.1.3, 5.3.3.1.4, 5.3.3.1.5, 5.3.4.3.1 and 5.3.4.3.2.

It is also recommended to indicate on the data sheet the road profile characterization described in annex B, i.e. the general and octave band characterization of the road and the fitted PSD (for examples see figures A.2 and A.4).

5.3.2 Multiple-track data curve sheet

For multiple-track data, the sheets of each PSD shall be reported as described in 5.3.1, together with a similar curve sheet for their coherence function. This sheet shall contain the smoothed coherence curve. The track width shall be indicated on this sheet.

When the information is given on one sheet, the separate curves should be carefully differentiated.

5.3.3 Parameters of analysis

5.3.3.1 For all forms of spatial analysis, the following information shall be reported.

5.3.3.1.1 The analysis method used, analog or digital.

5.3.3.1.2 Pre-processing filters shall be reported in terms of cut-off spatial frequency, slope (dB/octave) and type of filter (for example Butterworth). In the case of the digital analysis, this includes the anti-aliasing filter.

5.3.3.1.3 The resolution bandwidth: in the case of a relative constant bandwidth analysis, it is sufficient to state the proportion octave bandwidth only.

5.3.3.1.4 The real distance travelled of the data, in metres, analysed and reported.

In order to quantify wavelengths of 100 m with a statistical precision of 0,6 at a spatial frequency resolution of $0,01 \text{ m}^{-1}$, the distance travelled shall be at least 1 000 m.

In some cases it may be impossible or perhaps of no interest to reach this limit, for example for short roads or for the study of special forms of surfaces. In this case a remark in the report is required. For a discussion of statistical precision, see annex D.

5.3.3.1.5 The statistical precision of spectral estimates of the data: in the case of a relative constant bandwidth analysis, the statistical precision of the narrowest bandwidth shall be reported. The statistical precision shall be stated as $\pm \text{ %}$ value, calculated for a 95 % confidence level (i.e. the statistical precision shall be stated as 1,96 times the normalized standard error) on the basis of random error.

5.3.3.2 For analog spectral analyses, the following information shall be reported, in addition to that specified in 5.3.3.1.

5.3.3.2.1 The class of bandwidth filters in accordance with IEC 1260.

5.3.3.2.2 The slopes (dB/octave) and type of constant bandwidth filter.

5.3.3.3 For digital spectral analyses, the following information shall be reported, in addition to that specified in 5.3.3.1.

5.3.3.3.1 The specific method used (such as Fast Fourier Transform, Mean Lagged Product, Continuous Digital Filter).

5.3.3.3.2 The sampling spatial frequency.

5.3.3.3.3 The sampling window function and correction factor used.

5.3.3.3.4 The reported resolution bandwidth, if it is different from the analysis bandwidth (for example when frequency-smoothing is used).

5.3.4 Test conditions

5.3.4.1 The date of the measurement shall be reported.

5.3.4.2 The instrumentation used shall be reported as follows.

5.3.4.2.1 Short description of the measuring system.

a) Mechanical design.

b) Scanning device

— in the case of a contacting device (for example, a wheel): description of the design (for example, a soft wheel), mass, tyre pressure, tyre dimensions, effective diameter, nominal test load and dimensions of the contact area under nominal test load;

- in the case of a non-contacting device (for example, a radar system): resolution, dimensions of the effective measured area, etc.
- c) The capability of the equipment to take into account slope bias and transverse slope effects over long distances and long wavelengths.

5.3.4.2.2 A flowchart showing transducers, telemetry, tape recorder, filters, etc.

5.3.4.2.3 The instrumentation and calibration chain of the measuring system should be carefully reported. Details of the design, the guaranteed transfer function and the accuracy should be given, either in the report or in a source reference.

5.3.4.2.4 The cut-off frequencies of any filter used in conjunction with the recording of the data.

5.3.4.3 The road or terrain description shall be reported as follows.

5.3.4.3.1 Definition of the road: country, road number, location, village, direction and, if possible, a small map. Also traffic density [annual average daily traffic (AADT), when possible], typical vehicle speed and other relevant descriptive information shall be reported.

5.3.4.3.2 The road profile shall be reported with respect to at least the type of surface (concrete pavement, compacted soil, cobblestone, etc.) and the surface condition (new pavement, rutted road, poorly maintained, etc.), the grade (longitudinal slope), the cross-fall (lateral slope) and the curve radius (if any). In the case of off-road measurements, the cone penetration resistance of the soil should be reported together with a reference or a description of the measurement method used (see, for instance, reference [13]).

5.3.4.3.3 Definition of the measured track: distance from the measured track to the near side of the road. A sketch of the road, with indication of the tracks reserved for bicycles, parking and traffic is recommended. All unusual facts should be indicated.

5.3.4.3.4 A photograph of the road shall be included. It shall be taken from a height of 1,4 m (approximately the height of the eyes of the driver of a passenger car). The photograph shall also show a two-dimensional scale indication and the position of the measured tracks.

5.3.4.3.5 If two- or multiple-track data are given, they shall be described as in 5.3.4.3.3. The distance between the tracks shall also be given.

Table 2 — Centre frequencies and cut-off frequencies for PSD smoothing, expressed in spatial frequency n

a) Octave bandwidth

EXP	n_l m^{-1}	n_c m^{-1}	n_h m^{-1}
- 9	0,001 4	0,002 0	0,002 8
- 8	0,002 8	0,003 9	0,005 5
- 7	0,005 5	0,007 8	0,011 0
- 6	0,011 0	0,015 6	0,022 1
- 5	0,022 1	0,031 2	0,044 2

b) Third-octave bandwidth

EXP	n_l m^{-1}	n_c m^{-1}	n_h m^{-1}
- 4,333	0,044 2	0,049 6	0,055 7
- 4	0,055 7	0,062 5	0,070 2
- 3,667	0,070 2	0,078 7	0,088 4
- 3,333	0,088 4	0,099 2	0,111 4
- 3	0,111 4	0,125 0	0,140 3
- 2,667	0,140 3	0,157 5	0,176 8
- 2,333	0,176 8	0,198 4	0,222 7
- 2	0,222 7	0,250 0	0,280 6

NOTES

8 n_l = lower cut-off frequency

n_c = centre frequency

n_h = upper cut-off frequency

$n_c = 2^{EXP}$

9 A small overlap exists between the lowest twelfth-octave bandwidth and the highest third-octave bandwidth. This overlap maintains the values 0,5; 1; 2; 4 as centre frequencies in the twelfth-octave bands. This makes it convenient to calculate the road characterization (see B.3) immediately from the twelfth-octave band smoothing.

c) Twelfth-octave bandwidth

EXP	n_l m^{-1}	n_c m^{-1}	n_h m^{-1}
- 1,833	0,272 6	0,280 6	0,288 8
- 1,750	0,288 8	0,297 3	0,306 0
- 1,667	0,306 0	0,315 0	0,324 2
- 1,583	0,324 2	0,333 7	0,343 5
- 1,500	0,343 5	0,353 6	0,363 9
- 1,417	0,363 9	0,374 6	0,385 6
- 1,333	0,385 6	0,396 9	0,408 5
- 1,250	0,408 5	0,420 4	0,432 8
- 1,167	0,432 8	0,445 4	0,458 5
- 1,083	0,458 5	0,471 9	0,485 8
- 1	0,485 8	0,5	0,514 7
- 0,917	0,514 7	0,529 7	0,545 3
- 0,833	0,545 3	0,561 2	0,577 7
- 0,750	0,577 7	0,594 6	0,612 0
- 0,667	0,612 0	0,630 0	0,648 4
- 0,583	0,648 4	0,667 4	0,687 0
- 0,500	0,687 0	0,707 1	0,727 8
- 0,417	0,727 8	0,749 2	0,771 1
- 0,333	0,771 1	0,793 7	0,817 0
- 0,250	0,817 0	0,840 9	0,865 5
- 0,167	0,865 5	0,890 9	0,917 0
- 0,083	0,917 0	0,943 9	0,971 5
0	0,971 5	1	1,029 3
0,083	1,029 3	1,059 5	1,090 5
0,167	1,090 5	1,122 5	1,155 4
0,250	1,155 4	1,189 2	1,224 1
0,333	1,224 1	1,259 9	1,296 8
0,417	1,296 8	1,334 8	1,374 0
0,500	1,374 0	1,414 2	1,455 7
0,583	1,455 7	1,498 3	1,542 2
0,667	1,542 2	1,587 4	1,633 9
0,750	1,633 9	1,681 8	1,731 1
0,833	1,731 1	1,781 8	1,834 0
0,917	1,834 0	1,887 7	1,943 1
1	1,943 1	2	2,058 6
1,083	2,058 6	2,118 9	2,181 0
1,167	2,181 0	2,244 9	2,310 7
1,250	2,310 7	2,378 4	2,448 1
1,333	2,448 1	2,519 8	2,593 7
1,417	2,593 7	2,669 7	2,747 9
1,500	2,747 9	2,828 4	2,911 3
1,583	2,911 3	2,996 6	3,084 4
1,667	3,084 4	3,174 8	3,267 8
1,750	3,267 8	3,363 6	3,462 1
1,833	3,462 1	3,563 6	3,668 0
1,917	3,668 0	3,775 5	3,886 1
2	3,886 1	4	4,117 2
2,083	4,117 2	4,237 9	4,362 0
2,167	4,362 0	4,489 8	4,621 4
2,250	4,621 4	4,756 8	4,896 2
2,333	4,896 2	5,039 7	5,187 4
2,417	5,187 4	5,339 4	5,495 8
2,500	5,495 8	5,656 9	5,822 6
2,583	5,822 6	5,993 2	6,168 8
2,667	6,168 8	6,349 6	6,535 7
2,750	6,535 7	6,727 2	6,924 3
2,833	6,924 3	7,127 2	7,336 0
2,917	7,336 0	7,551 0	7,772 3
3	7,772 3	8	8,234 4

Annex A

(informative)

Example of a report

This annex contains fictitious data arranged to form an example for two-track reporting which meets the minimum requirements of this International Standard. However, the photograph is omitted.

NOTES

- 10 The numbers in parentheses refer to the subclauses in this International Standard.
- 11 The parts of figure A.2 and figure A.4 placed in a double frame are the recommended characterizations of the road profile described in annex B. They are not required, but recommended.
- 12 The format of the data sheets is not standardized.

A.1 Parameters of analysis

Analysis (5.3.3.1.1, 5.3.3.3.1): FFT

anti-aliasing filter (5.3.3.1.2): 48 dB/octave

Butterworth: 0,5 cycles/m low-pass

Sampling spatial frequency (5.3.3.3.2):

1,4 cycles/m


Sampling window function (5.3.3.3.3): Hanning

Correction factor (PSD) (5.3.3.3.3): $1,63^2$

A.2 Test conditions

Measuring system (5.3.4.2.1, 5.3.4.2.3, 5.3.4.2.4): see Verschoore, R. *Het gebruik van de wegsimulator en de analoge rekenmachine in het onderzoek van voertuigsuspensies*. Gent, 1973.

Flow chart (5.3.4.2.2):

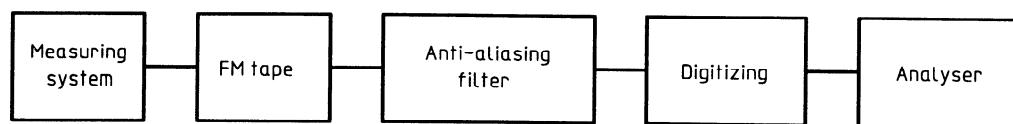

A.3 Road description

Road definition (5.3.4.3.1) (see figure A.1):

traffic: AADT, 4 200 vehicles/day

typical vehicle speed: 90 km/h

Road profile (5.3.4.3.2):

concrete pavement, 10 years old

grade 0 %

slope 0,06 %

no curve

Photograph (5.3.4.3.4) (omitted in this example)

A.4 Road characterization

See figures A.1 to A.4.

STANDARDSISO.COM : Click to view the full PDF of ISO 8608:1995

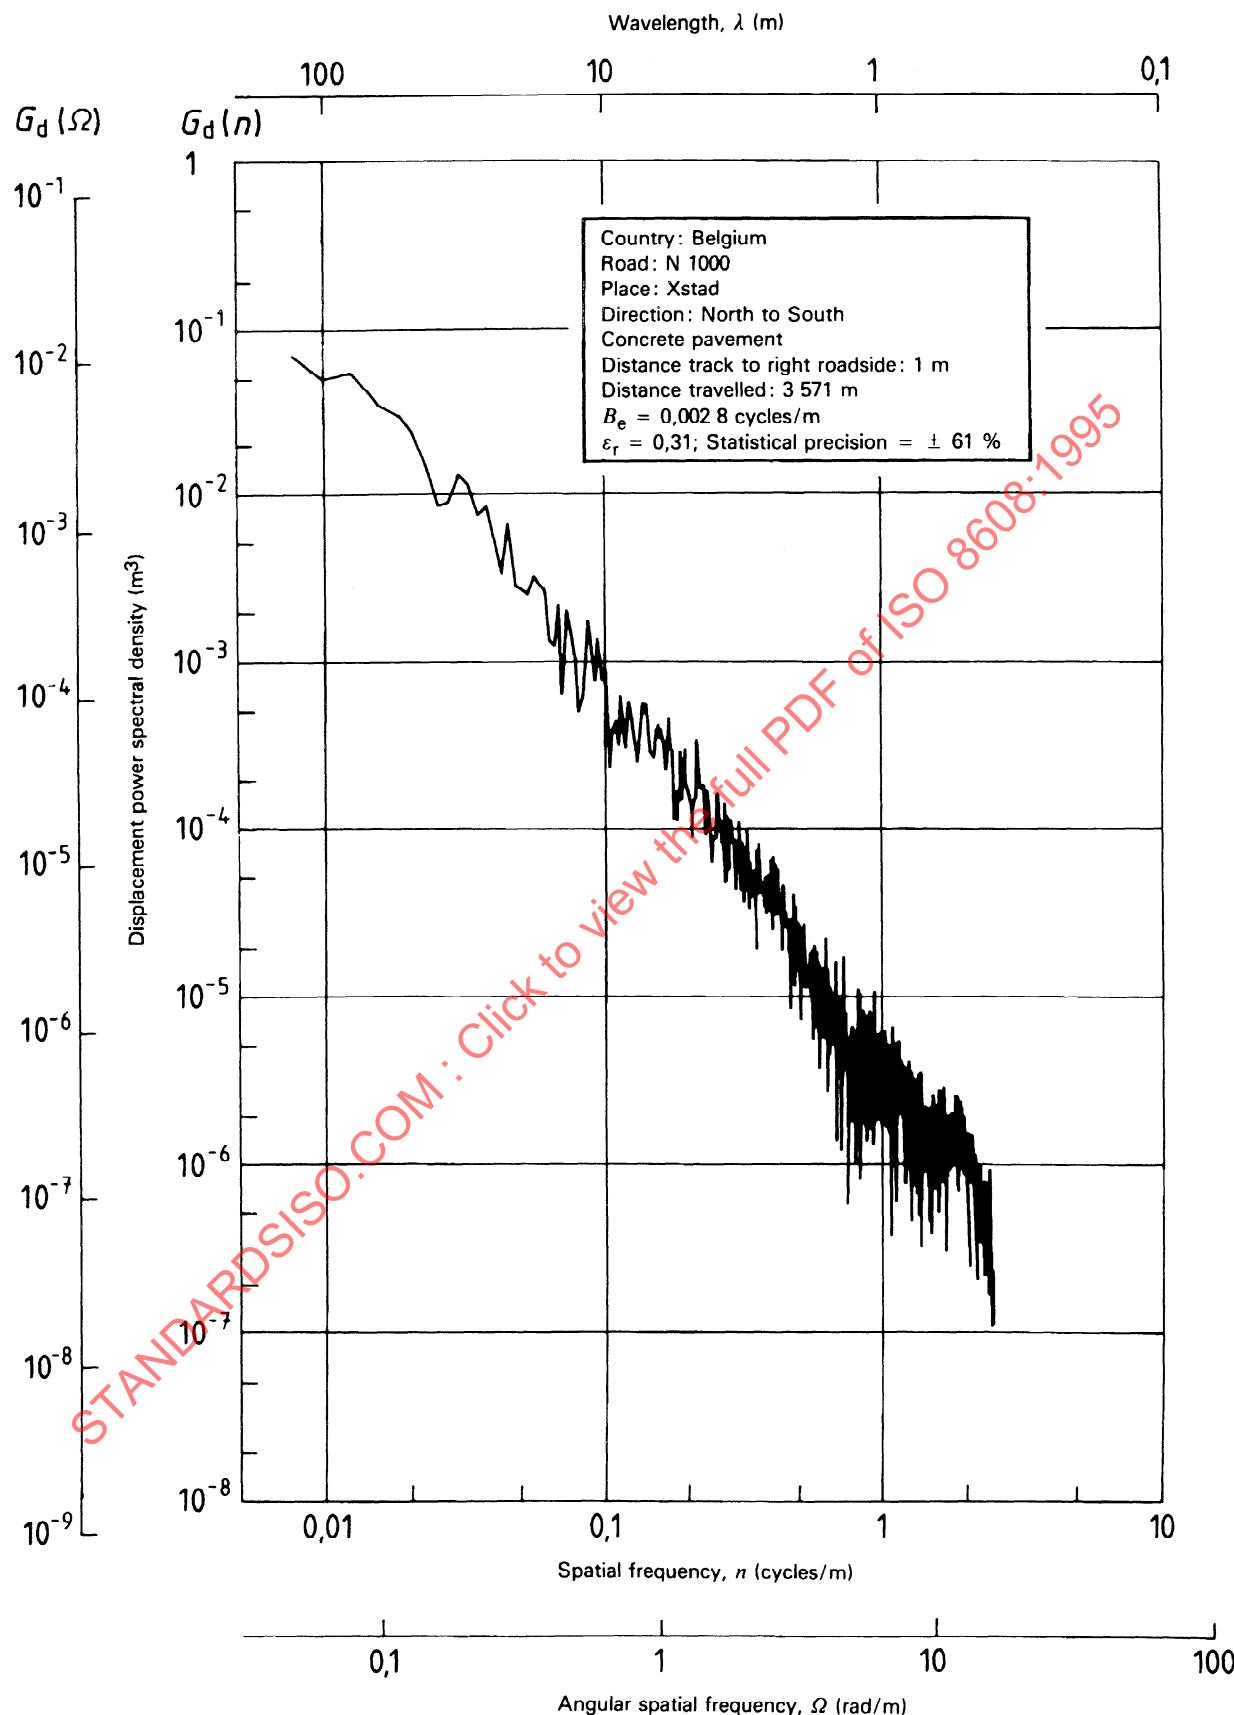


Figure A.1 — Non-smoothed PSD of track 1

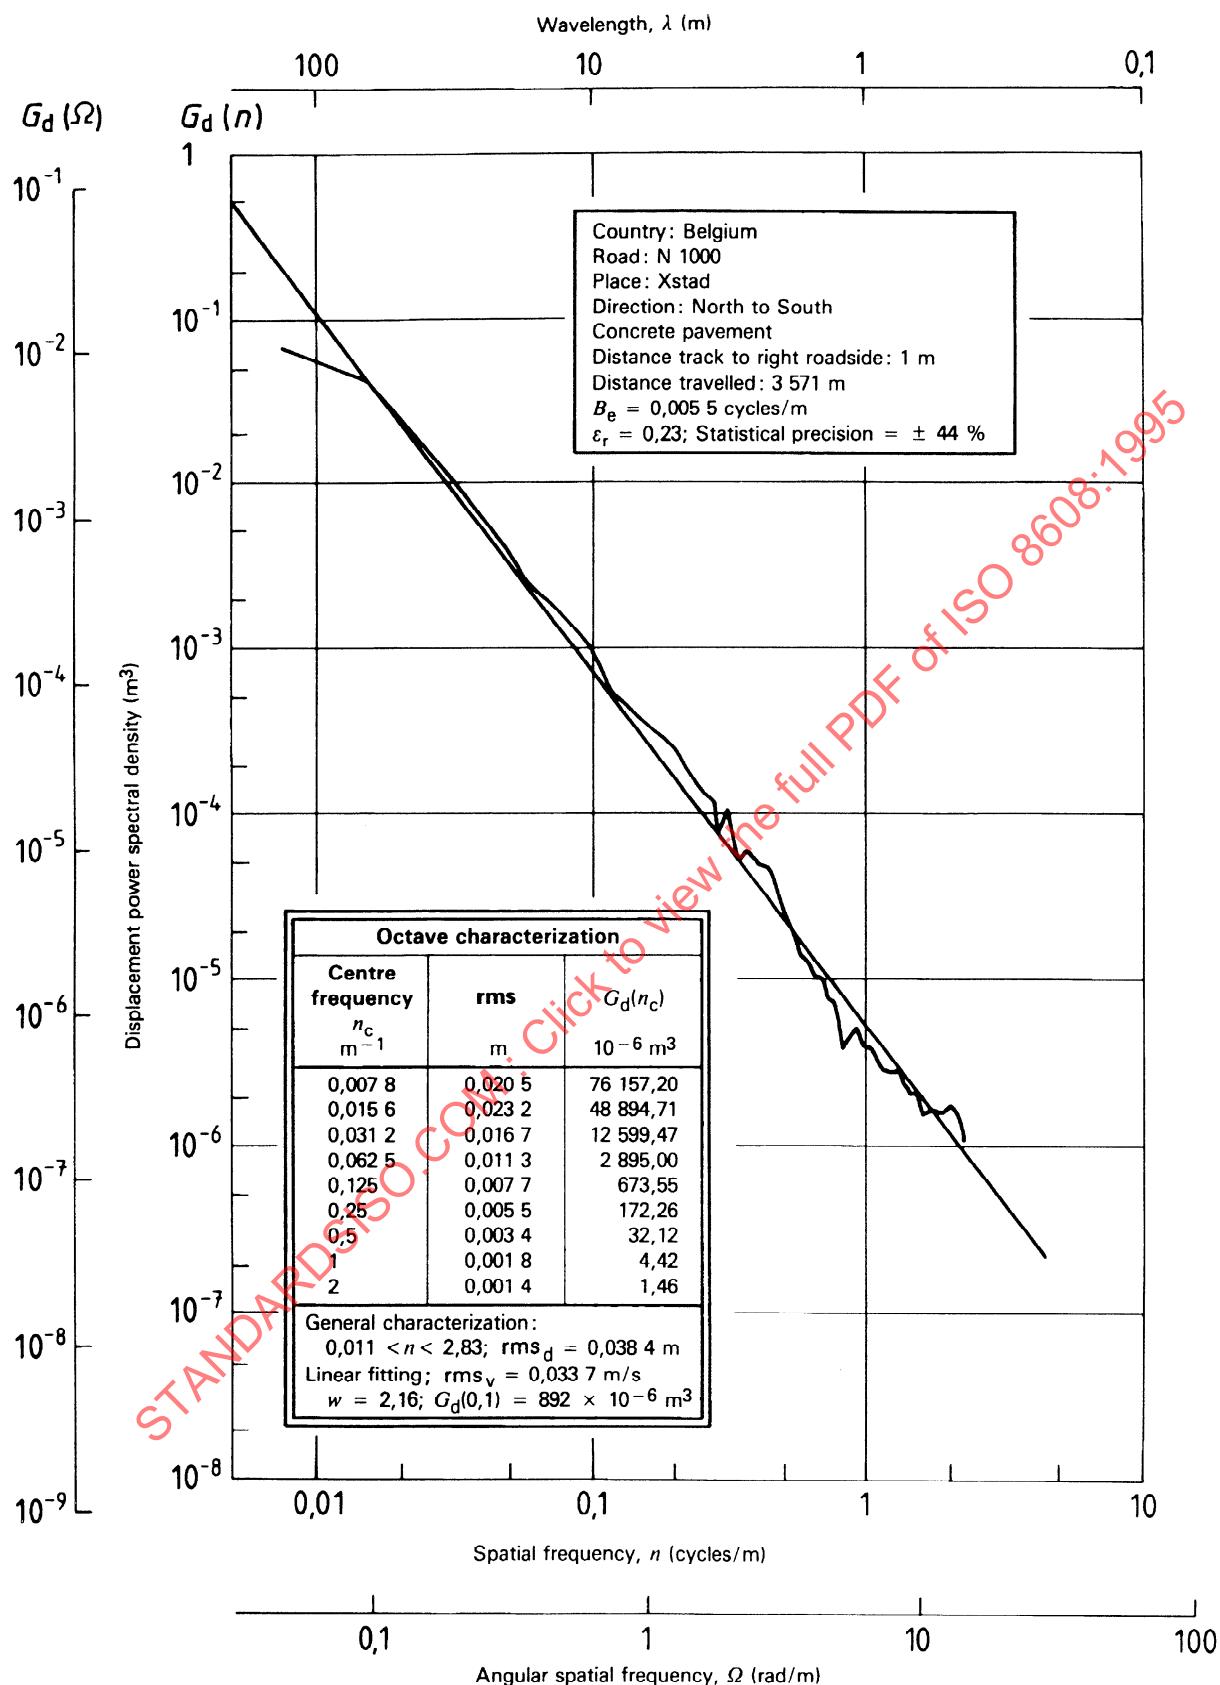


Figure A.2 — Smoothed PSD of track 1 (characterization: see annex B)

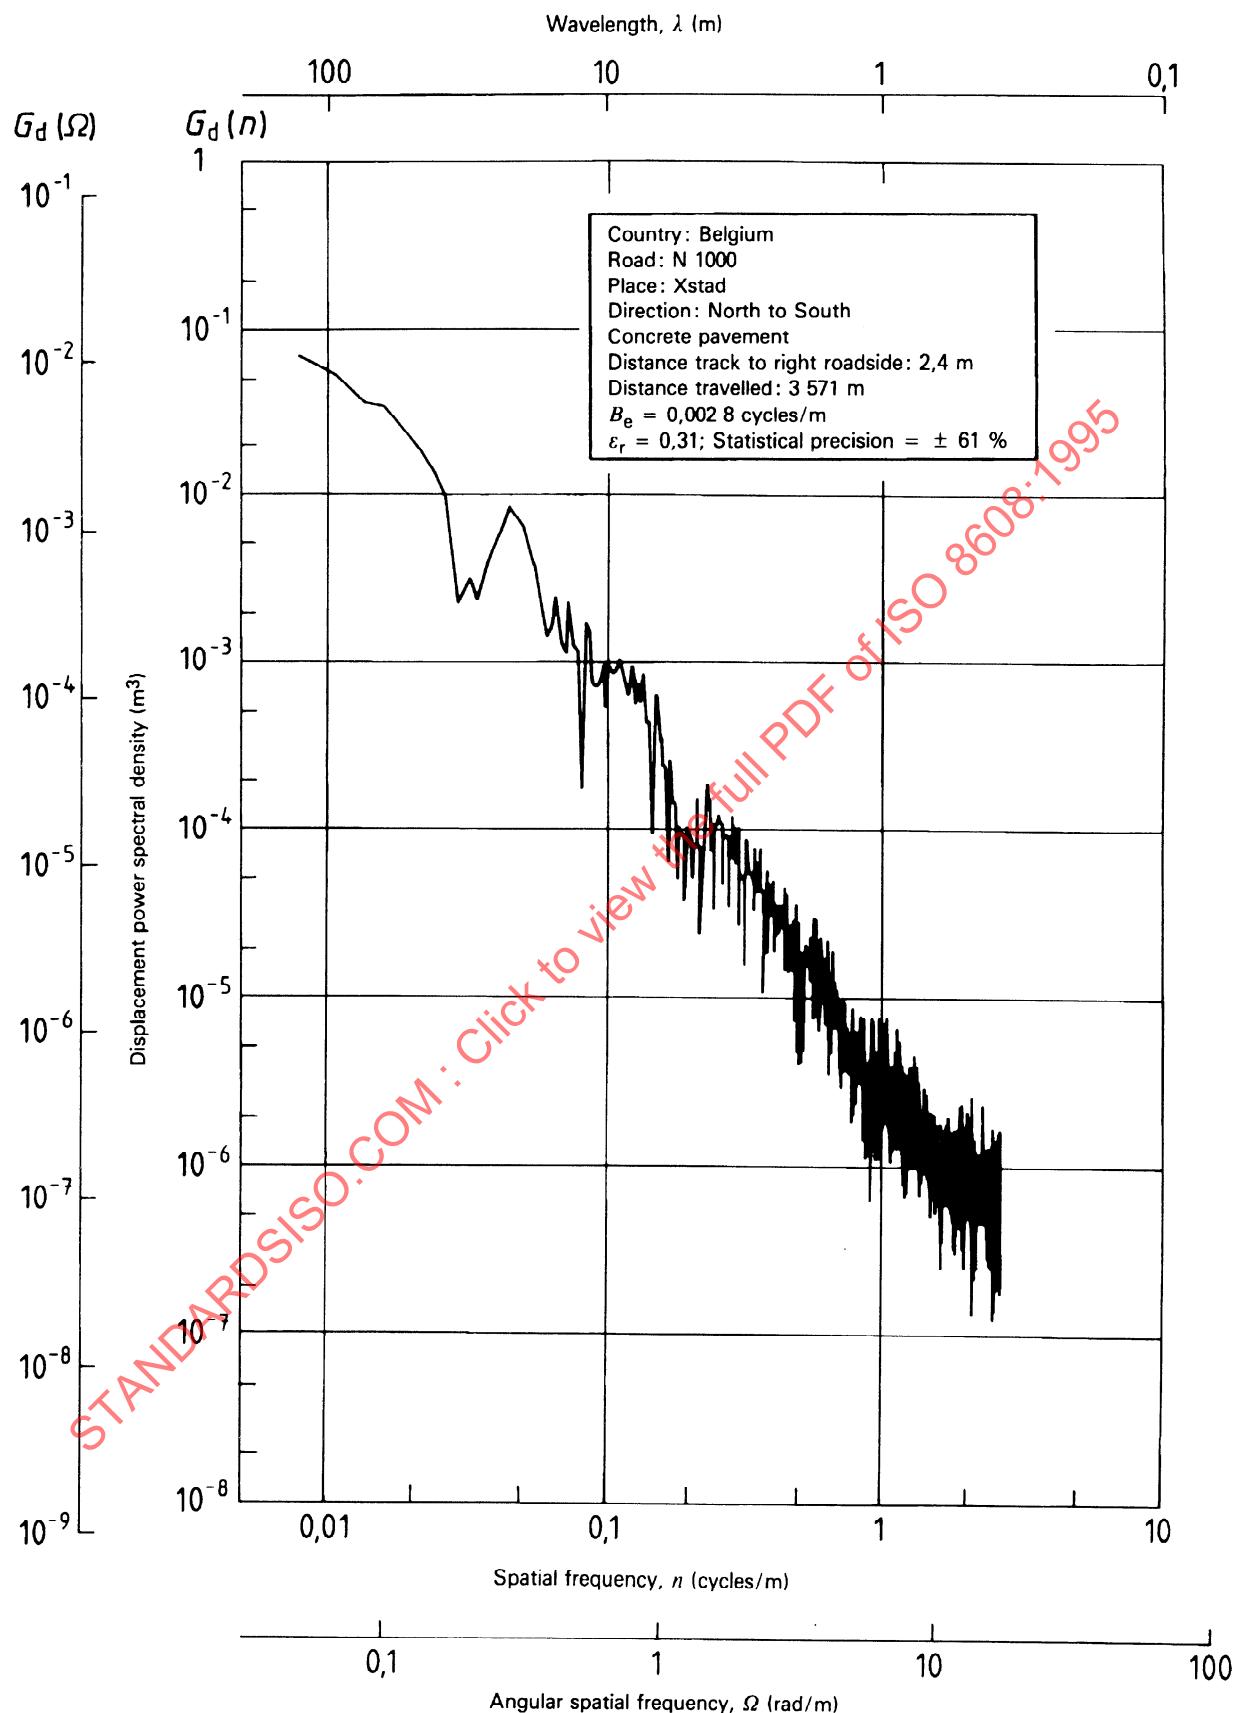


Figure A.3 — Non-smoothed PSD of track 2

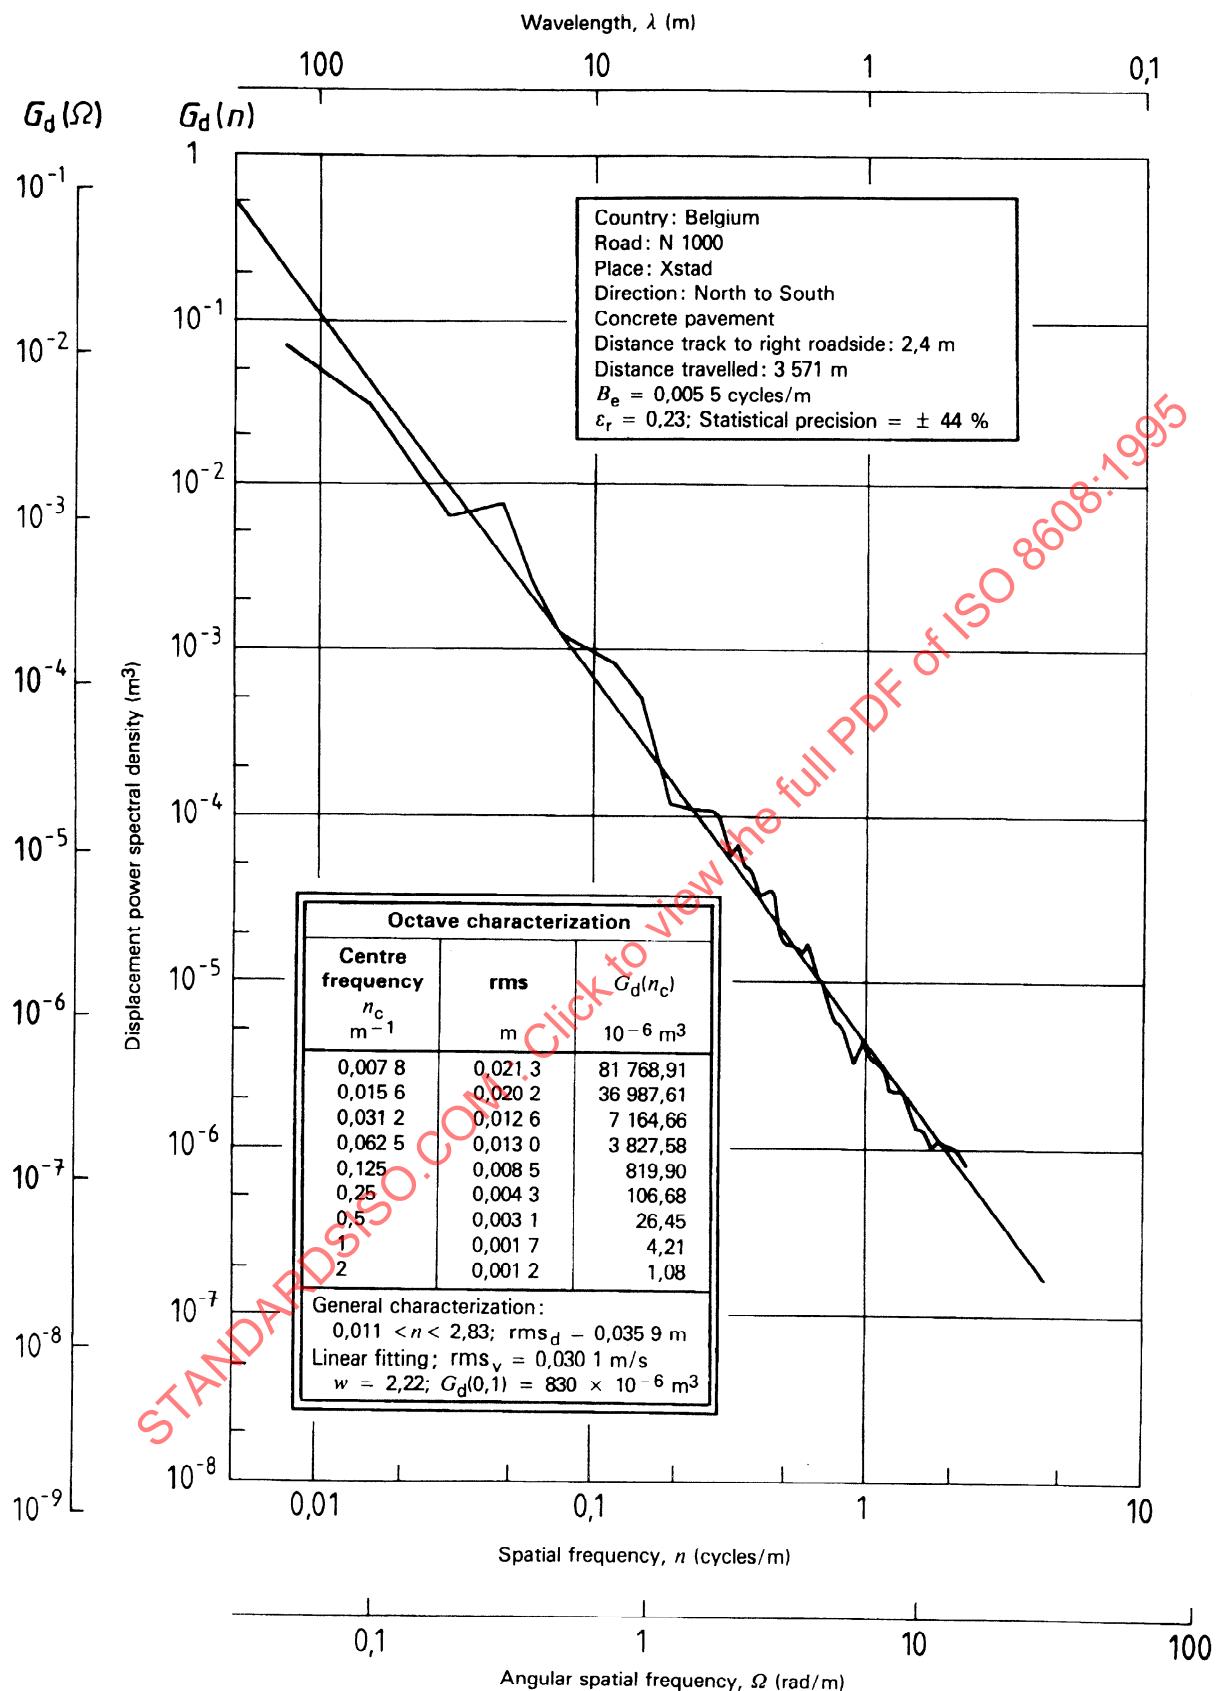


Figure A.4 — Smoothed PSD of track 2 (characterization: see annex B)

Annex B

(informative)

Road profile characterization and PSD fitting

This annex gives means of approximately characterizing specific road profiles in order to facilitate the division of road profiles into general classifications. A general classification is also given. A curve-fitting method is suggested for characterizing spectral data.

B.1 Symbols

See table B.1

Table B.1 — Symbols

Symbol	Description	Unit
n	Spatial frequency	cycles/m
n_0	Reference spatial frequency (= 0,1 cycles/m)	cycles/m
$G_d (.)$	Displacement PSD	m^3
$G_a (.)$	Acceleration PSD	m^{-1}
w	Exponent of fitted PSD calculated on $G_d (.)$	—
w'	Exponent of fitted PSD calculated on $G_a (.)$	—
Ω	Angular spatial frequency	rad/m
Ω_0	Reference angular spatial frequency (= 1 rad/m)	rad/m

B.2 General characterization of the road profile

The r.m.s. value between $n = 0,011$ cycles/m ($\Omega = 0,063$ rad/m) and $n = 2,83$ cycles/m ($\Omega = 17,77$ rad/m), calculated from the displacement PSD, shall be reported. These limits are band limits for the octave bands to be calculated in 5.1.2 and B.3. These limits were chosen in relation to the frequency data existing in the literature.

However, for off-road data, special studies and limited distances travelled, this spatial frequency range may be reduced. In that case the spatial frequency range shall be reported.

B.3 Characterization in octave bands

In order to obtain surveyable and classifiable data, the spectrum should be divided into octave bands and the r.m.s. values, calculated from the displacement PSD, should be noted for each band. The centre frequencies are given in table B.2.

The characterizations described in B.2 and B.3 can be calculated with a small and easy supplementary calculation following the processing of the smoothed PSD.

B.4 Fitted PSD

The smoothed form of the PSD may be fitted by a straight line on the smoothed data (5.1.2) by the least-mean-square method in the spatial frequency range 0,011 cycles/m to 2,83 cycles/m. This fitting may be represented on the general presentation plot. The equation of the fitting shall be reported.

The general form of the fitted PSD will be

$$G_d(n) = G_d(n_0) \cdot (n/n_0)^{-w}$$

or

$$G_d(\Omega) = G_d(\Omega_0) \cdot (\Omega/\Omega_0)^{-w}$$

where

n_0 (= 0,1 cycles/m) is the reference spatial frequency;

Ω_0 (= 1 rad/m) is the reference angular spatial frequency;

w is the exponent of the fitted PSD.

When the fitting is calculated on the acceleration PSD the exponent will be $w' = w - 4$.

NOTE 13 In this annex only a one-straight line fitting is proposed. In the literature a two or more straight line fitting is often used, but the standardization of a method which guarantees a unique solution is practically impossible.

Table B.2 — Centre frequencies and cut-off frequencies for PSD characterization in octaves**a) Spatial frequency units, n**

EXP	Spatial frequencies, cycles/m			Centre wavelength m
	Lower cut-off	Centre frequency ¹⁾	Upper cut-off	
- 9	0,001 4	0,002 0	0,002 8	512
- 8	0,002 8	0,003 9	0,005 5	256
- 7	0,005 5	0,007 8	0,011 0	128
- 6	0,011 0	0,015 6	0,022 1	64
- 5	0,022 1	0,031 2	0,044 2	32
- 4	0,044 2	0,062 5	0,088 4	16
- 3	0,088 4	0,125	0,176 8	8
- 2	0,176 8	0,25	0,353 6	4
- 1	0,353 6	0,5	0,707 1	2
0	0,707 1	1	1,414 2	1
1	1,414 2	2	2,828 4	0,5
2	2,828 4	4	5,656 9	0,25
3	5,656 9	8	11,313 7	0,125

1) Centre frequency = 2^{EXP} **b) Angular spatial frequency units, Ω**

EXP	Angular spatial frequencies, rad/m			Centre wavelength m
	Lower cut-off	Centre frequency ¹⁾	Upper cut-off	
- 6,35	0,008 7	0,012 3	0,017 4	512
- 5,35	0,017 4	0,024 5	0,034 7	256
- 4,35	0,034 7	0,049 1	0,069 4	128
- 3,35	0,069 4	0,098 2	0,138 8	64
- 2,35	0,138 8	0,196 3	0,277 7	32
- 1,35	0,277 7	0,392 7	0,555 4	16
- 0,35	0,555 4	0,785 4	1,110 7	8
0,65	1,110 7	1,570 8	2,221 4	4
1,65	2,221 4	3,141 6	4,442 9	2
2,65	4,442 9	6,283 2	8,885 8	1
3,65	8,885 8	12,566 4	17,771 6	0,5
4,65	17,771 6	25,132 8	35,543 1	0,25
5,65	35,543 1	50,265 6	71,086 3	0,125

1) Centre frequency = 2^{EXP}

Annex C

(informative)

General guidance for the use of the statistical road profile description

This annex provides general guidance for the use of road profile statistical data for simulation studies and for related studies such as evaluation of comfort, suspensions and road profiles.

C.1 Symbols

See table C.1.

C.2 Relationship between time frequency and spatial frequency

Figure C.1 gives the relationship between the vehicle speed, the spatial frequency and the time frequency. Knowledge of the resonance frequencies and the speed range for a given class of vehicle makes it possible to choose the useful limits for that class of vehicle.

Table C.1 — Symbols

Symbol	Description	Unit
f	Time frequency	Hz
l	Wheelbase	m
$G_d(.)$	Displacement PSD	m^3
$G_v(.)$	Velocity PSD	m
$G_a(.)$	Acceleration PSD	m^{-1}
n	Spatial frequency	cycles/m
n_c	Centre spatial frequency of a frequency band	cycles/m
n_0	Reference spatial frequency (= 0,1 cycles/m)	cycles/m
R	Tyre radius	m
T	Time constant of a filter	s
v	Vehicle speed	m/s
w	Exponent of the fitted PSD calculated on $G_d(.)$	—
Δt	Time delay for four-track (two-axle) simulation	s
λ	Wavelength	m
ω	Angular frequency (= $2\pi f$)	rad/s
Ω	Angular spatial frequency	rad/m
Ω_c	Centre angular spatial frequency of a frequency band	rad/m
Ω_0	Reference angular spatial frequency (= 1 rad/m)	rad/m

NOTE — The indication (.) means that the parameter of the function can be spatial frequency (n) or angular spatial frequency (Ω).

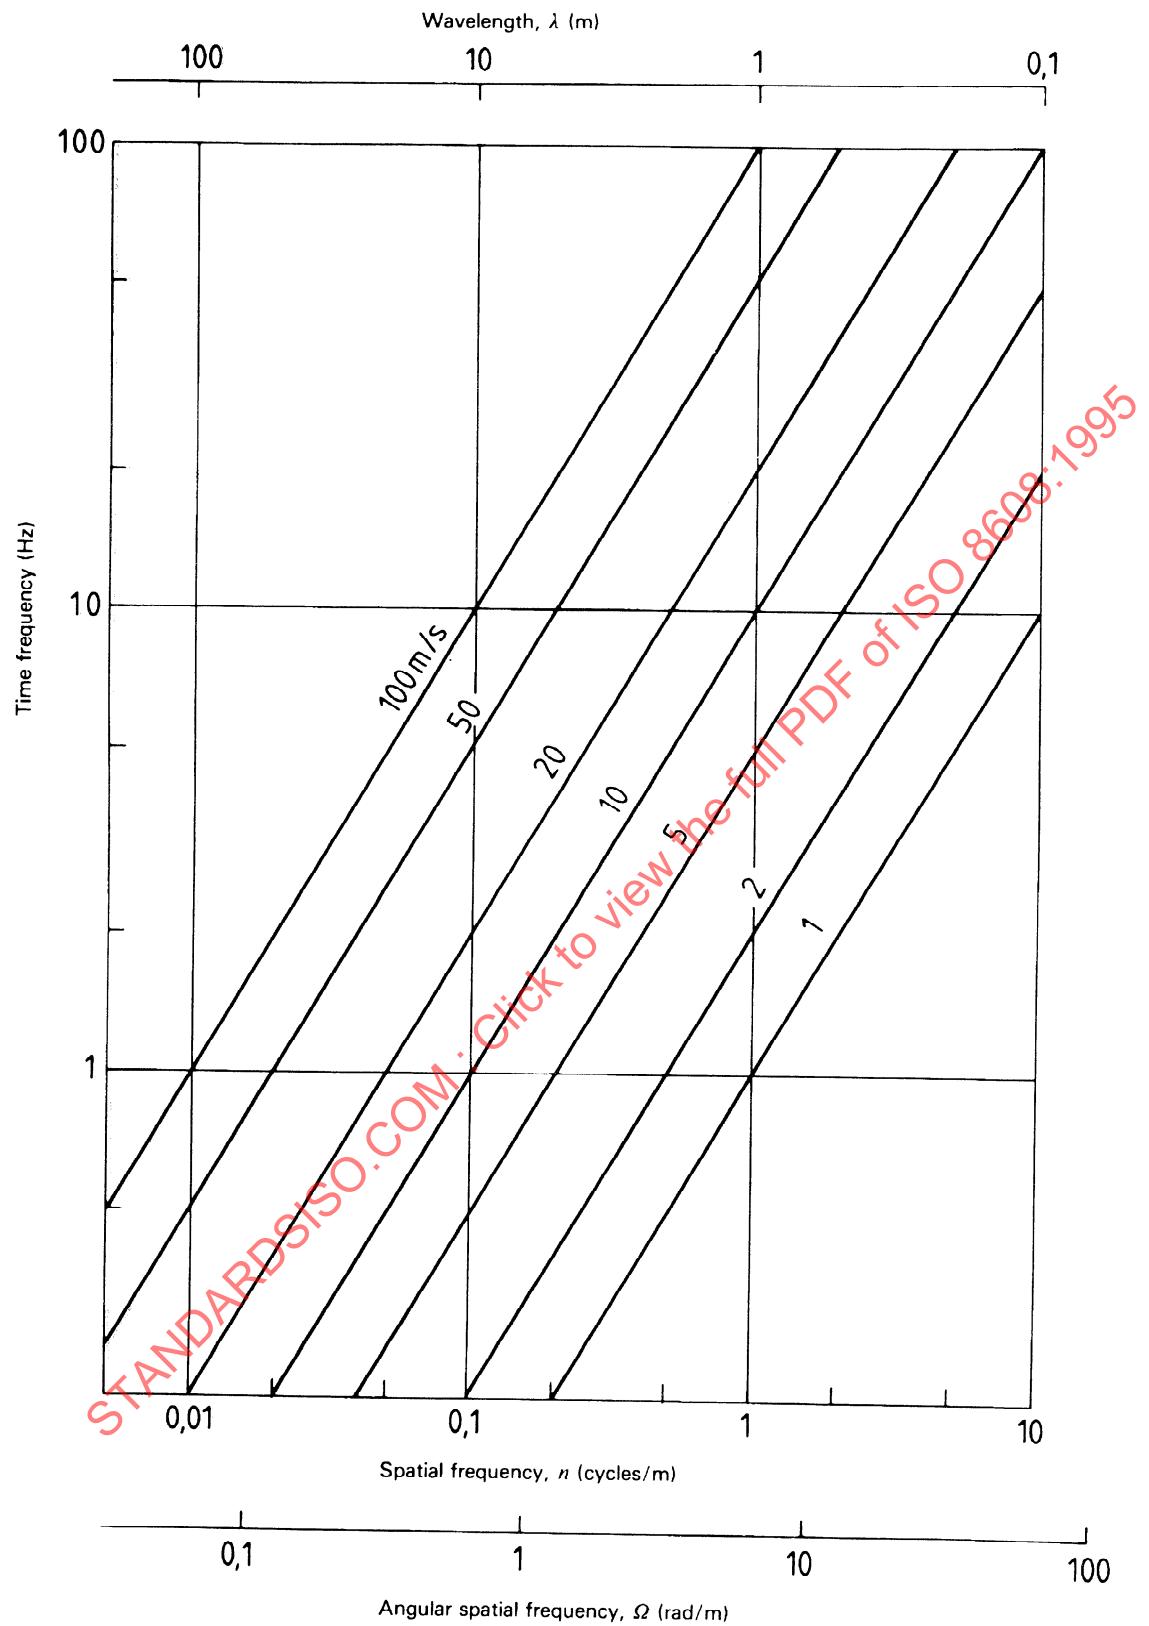


Figure C.1 — Relationship between time frequency and spatial frequency as a function of vehicle speed

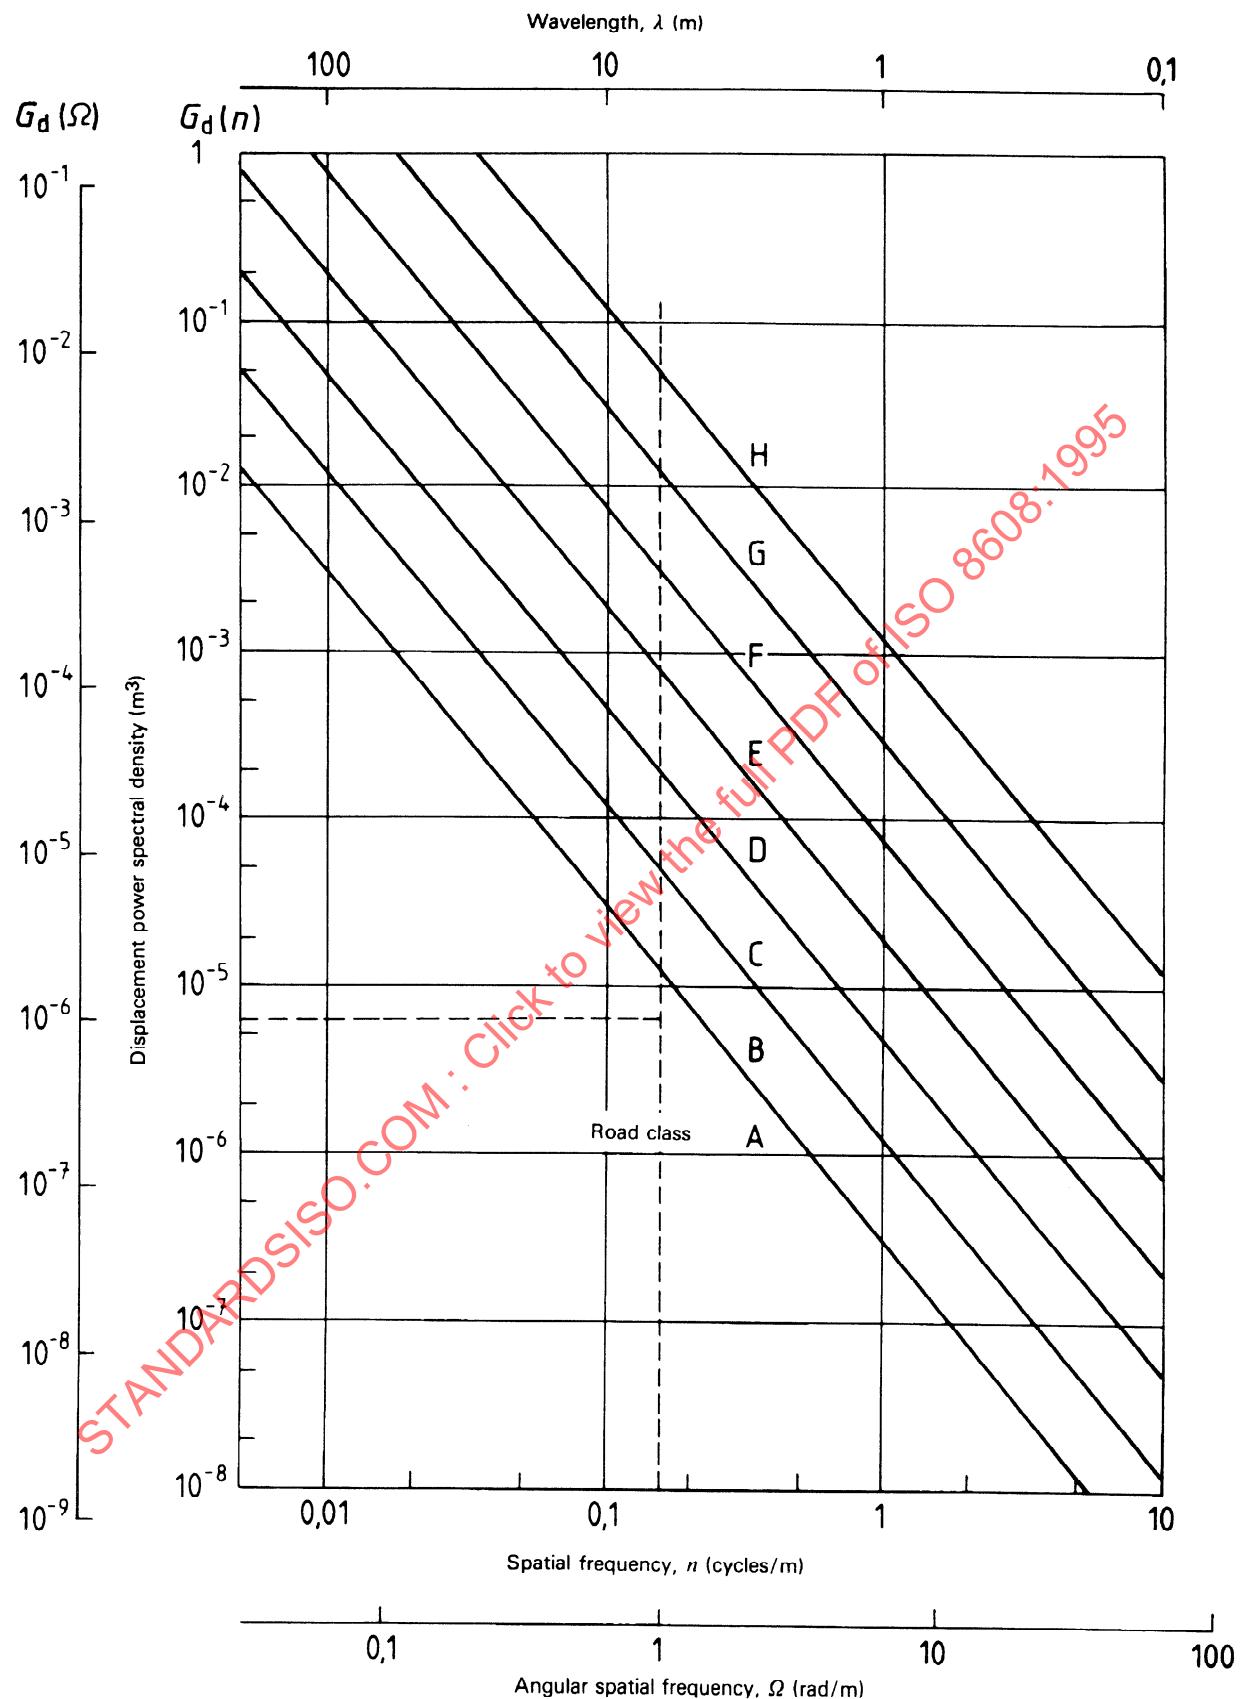


Figure C.2 — Classification of roads

The general expression for this relationship is

$$f = n \cdot v$$

or

$$\omega = \Omega \cdot v$$

C.3 Velocity PSD

For simulation studies it is often convenient to use the velocity PSD, in terms of change of the vertical ordinate of the road surface per unit distance travelled. The relationship between the displacement PSD and the velocity PSD is given by

$$G_v(n) = G_d(n) \cdot (2\pi n)^2$$

$$G_v(\Omega) = G_d(\Omega) \cdot \Omega^2$$

When $w = 2$ in the following expression (see annex B)

$$G_d(n) = G_d(n_0) \cdot (n/n_0)^{-w}$$

then

$$G_v(n) = G_v(n_0) = \text{constant}$$

$$G_v(\Omega) = G_v(\Omega_0) = \text{constant}$$

C.4 Classification of roads

An estimate of the degree of roughness of the road can be made by the $G_d(n_0)$ value of the fitted PSD (see B.4). Table C.2 gives the power spectral densities for different classes of roads. In figure C.2 the class limits are graphed on the displacement PSD. This classification is made by assuming a constant-velocity PSD, which means $w = 2$.

However, due to the fact that the PSD is not always a straight line, more information is given by the power spectral density or the r.m.s. displacement in the different octave bands. This makes it possible to classify the road for every octave band in an appropriate class. It may give some information for the repair need and method. It is also possible to classify the road for an appropriate band of speeds. For example, for highways, when assuming that the velocities are between 70 km/h and 120 km/h, the band between 0,022 1 cycles/m and 1,414 2 cycles/m (0,138 8 rad/m and 8,885 8 rad/m) is the most significant.

Table C.3 gives the mean values and limits of $G_d(n_c)$ and $G_d(\Omega_c)$ for the different classes of road in the different octave bands.

Table C.4 gives the mean values and limits of r.m.s. displacement for the different classes of road in the different octave bands.

The following relationships are used:

$$\begin{aligned} G_d(n_0) &= 2\pi G_d(\Omega_0) \cdot [\Omega_0/(2\pi n_0)]^2 \\ &= 16 \cdot G_d(\Omega_0) \\ G_v(n) &= G_d(n_0) \cdot (2\pi n_0)^2 \\ G_v(\Omega) &= G_d(\Omega_0) \cdot \Omega^2 \end{aligned}$$

NOTE 14 The words "limit" and "limits" as used in this annex refer to the mathematical meaning of the words in connection with the word "mean". In other words, a range of values has a mean value and limits which denote the extremes of the range of values. The word "limit", as used in this annex, is not to be construed to mean the limit of acceptability of a road surface.

C.5 General guidance for road simulation

The statistical road profile description can be used for computer and laboratory road simulation. However, it may only be used for the determination of output PSDs. Because no information is given about phase shift, there is no guarantee as to the magnitude distribution of the road profile.

C.5.1 One-track (one-axle) simulation

For simulation purposes, it is convenient to describe the road profile as a constant-velocity PSD ($w = 2$).

The advantage of this description is a very easy simulation of the displacement by integrating white noise. The use of any other characteristic may require much effort and, due to the approximation methods to be applied, may result in inaccuracies which cause an unavoidable dispersion in the results of comparison tests. Account should be taken of the influence of the transfer function of the reproducing device.

C.5.2 Two-track (one-axle) simulation

In two-track simulation, the two tracks are simulated as in C.5.1. For the relationship between the two tracks it is convenient to assume that the road surface possesses the property of isotropy, i.e. that all profiles of a given stretch of road, irrespective of orientation and location, have the same properties, and to accept the coherence function resulting from this assumption.

C.5.3 Two- or multiple-axle track simulation

In two- or multiple-axle track simulation, the front tracks are simulated in accordance with C.5.2. For the following wheels it could be assumed that each rear wheel travels over the same profile as the corresponding front wheel. Consequently the rear wheel experiences, after a certain delay, the same imposed displacement as the corresponding front wheel.

The delay, Δt , in seconds, is given by

$$\Delta t = l/v$$

where

- l is the corresponding wheelbase, in metres;
- v is the speed of the vehicle, in metres per second.

NOTES

15 When simulation is to be done by means of a hydraulic simulator, the difference in vertical stiffness between a rolling and a non-rolling tyre should be taken into account. This difference can be reduced by using an adapted tyre

pressure and a special profiled plate between the simulator and tyre.

16 For computer simulation, the stiffness of a rolling tyre should be taken into account.

17 In order to avoid too large a displacement in the low time frequency range, it is recommended to limit the lowest frequency to a value related to the lowest frequency of interest.

18 For the study of the reactions from pot-holes or other typical road forms, for example concrete joints, these specific forms can be superposed on the normal spectrum or studied separately. However, also in this case, the influence of the enveloping effect of the tyre has to be considered.

For vertical displacement magnitudes which are smaller than $R/10$, a passive low-pass network with a time constant $T = R(12v)$ can be used. This expresses that in a pot-hole the vertical displacement of the wheel centre reaches 95 % of its nominal value after the distance of $R/4$, i.e. the time of $R/(4v)$. For displacement magnitudes greater than $R/10$, no correction is needed.

19 On unpaved terrain, the passage of the front wheel may modify the track profile such that the profile for the following wheel is not necessarily the same as the profile for the front wheel.

Table C.2 — Road classification

Road classification is based on $G_d(n_0)$, $G_d(\Omega_0)$, $G_v(n)$ and $G_v(\Omega)$ values.

NOTES

- 1 Fit exponent $w = 2$ is assumed (see B.4).
- 2 The mean values for road classes A and H are only for simulation purposes.

a) Spatial frequency units, n

Road class	Degree of roughness			
	$G_d(n_0)$ 1) 10^{-6} m^3			$G_v(n)$ 10^{-6} m
	Lower limit	Geometric mean	Upper limit	Geometric mean
A	—	16	32	6,3
B	32	64	128	25,3
C	128	256	512	101,1
D	512	1 024	2 048	404,3
E	2 048	4 096	8 192	1 617,0
F	8 192	16 384	32 768	6 468,1
G	32 768	65 536	131 072	25 872,6
H	131 072	262 144	—	103 490,3

1) $n_0 = 0,1$ cycles/m

b) Angular spatial frequency units, Ω

Road class	Degree of roughness			
	$G_d(\Omega_0)$ 1) 10^{-6} m^3			$G_v(\Omega)$ 10^{-6} m
	Lower limit	Geometric mean	Upper limit	Geometric mean
A	—	1	2	1
B	2	4	8	4
C	8	16	32	16
D	32	64	128	64
E	128	256	512	256
F	512	1 024	2 048	1 024
G	2 048	4 096	8 192	4 096
H	8 192	16 384	—	16 384

1) $\Omega_0 = 1$ rad/m

Table C.3 — Geometric mean and limits of the displacement PSD for different classes of roads as a function of the octave bands

NOTE — The mean values for road classes A and H are only for simulation purposes.

a) Spatial frequency units, n

Road class	Mean and limits $G_d(n_c)$	Octave centre spatial frequency, n_c cycles/m								
		0,007 8	0,015 6	0,031 2	0,062 5	0,125	0,25	0,5	1	2
A	Mean	2 621	655	164	41,0	10,2	2,56	0,64	0,16	0,04
	Upper	5 243	1 311	328	81,9	20,5	5,12	1,28	0,32	0,08
B	Lower	5 243	1 311	328	81,9	20,5	5,12	1,28	0,32	0,08
	Mean	10 486	2 621	655	163,8	41,0	10,24	2,56	0,64	0,16
	Upper	20 972	5 243	1 311	327,7	81,9	20,48	5,12	1,28	0,32
C	Lower	20 972	5 243	1 311	327,7	81,9	20,48	5,12	1,28	0,32
	Mean	41 943	10 486	2 621	655,4	163,8	40,96	10,24	2,56	0,64
	Upper	83 886	20 972	5 243	1 310,7	327,7	81,92	20,48	5,12	1,28
D	Lower	83 886	20 972	5 243	1 310,7	327,7	81,92	20,48	5,12	1,28
	Mean	167 772	41 943	10 486	2 621,4	655,4	163,84	40,96	10,24	2,56
	Upper	335 544	83 886	20 972	5 242,9	1 310,7	327,68	81,92	20,48	5,12
E	Lower	335 544	83 886	20 972	5 242,9	1 310,7	327,68	81,92	20,48	5,12
	Mean	671 089	167 772	41 943	10 485,8	2 621,4	655,36	163,84	40,96	10,24
	Upper	1 342 177	335 544	83 886	20 971,5	5 242,9	1 310,72	327,68	81,92	20,48
F	Lower	1 342 177	335 544	83 886	20 971,5	5 242,9	1 310,72	327,68	81,92	20,48
	Mean	2 684 354	671 089	167 772	41 943,0	10 485,8	2 621,44	655,36	163,84	40,96
	Upper	5 368 709	1 342 177	335 544	83 886,1	20 971,5	5 242,88	1 310,72	327,68	81,92
G	Lower	5 368 709	1 342 177	335 544	83 886,1	20 971,5	5 242,88	1 310,72	327,68	81,92
	Mean	10 737 417	2 684 354	671 089	167 772,1	41 943,0	10 485,76	2 621,44	655,36	163,84
	Upper	21 474 834	5 368 709	1 342 177	335 544,3	83 886,1	20 971,52	5 242,88	1 310,72	327,68
H	Lower	21 474 834	5 368 709	1 342 177	335 544,3	83 886,1	20 971,52	5 242,88	1 310,72	327,68
	Mean	42 949 668	10 737 417	2 684 354	671 088,6	167 772,1	41 943,04	10 485,76	2 621,44	655,36

b) Angular spatial frequency units, Ω

Road class	Mean and limits $G_d(\Omega_c)$	Octave centre angular spatial frequency, Ω_c								
		rad/m								
10^{-6} m^3	0,049 1	0,098 2	0,196 3	0,392 7	0,785 4	1,570 8	3,141 6	6,283 2	12,566 4	25,132 7
A	Mean	415	104	25,94	6,48	1,621	0,405	0,101 3	0,025 3	0,006 33
	Upper	830	208	51,88	12,97	3,242	0,811	0,202 6	0,050 7	0,012 67
B	Lower	830	208	51,88	12,97	3,242	0,811	0,202 6	0,050 7	0,012 67
	Mean	1 660	415	103,75	25,94	6,485	1,621	0,405 3	0,101 3	0,025 33
	Upper	3 320	830	207,51	51,88	12,969	3,242	0,810 6	0,202 6	0,050 66
C	Lower	3 320	830	207,51	51,88	12,969	3,242	0,810 6	0,202 6	0,050 66
	Mean	6 640	1 660	415,01	103,75	25,938	6,485	1,621 1	0,405 3	0,101 32
	Upper	13 280	3 320	830,02	207,51	51,876	12,969	3,242 3	0,810 6	0,202 64
D	Lower	13 280	3 320	830,02	207,51	51,876	12,969	3,242 3	0,810 6	0,202 64
	Mean	26 561	6 640	1 660,05	415,01	103,753	25,938	6,484 6	1,621 1	0,405 28
	Upper	53 121	13 280	3 320,09	830,02	207,506	51,876	12,969 1	3,242 3	0,810 57
E	Lower	53 121	13 280	3 320,09	830,02	207,506	51,876	12,969 1	3,242 3	0,810 57
	Mean	106 243	26 561	6 640,18	1 660,05	415,012	103,753	25,938 2	6,484 6	1,621 14
	Upper	212 486	53 121	13 280,37	3 320,09	830,023	207,506	51,876 4	12,969 1	3,242 28
F	Lower	212 486	53 121	13 280,37	3 320,09	830,023	207,506	51,876 4	12,969 1	3,242 28
	Mean	424 972	106 243	26 560,74	6 640,19	1 660,046	415,012	103,752 9	25,938 2	6,484 56
	Upper	849 944	212 486	53 121,48	13 280,37	3 320,093	830,023	207,505 8	51,876 4	12,969 11
G	Lower	849 944	212 486	53 121,48	13 280,37	3 320,093	830,023	207,505 8	51,876 4	12,969 11
	Mean	1 699 888	424 972	106 242,95	26 560,74	6 640,186	1 660,046	415,011 5	103,752 9	25,938 22
	Upper	3 399 775	849 944	212 485,91	53 121,48	13 280,371	3 320,092	830,023 0	207,505 8	51,876 45
H	Lower	3 399 775	849 944	212 485,91	53 121,48	13 280,371	3 320,092	830,023 0	207,505 8	51,876 45
	Mean	6 799 550	1 699 888	424 971,81	106 242,97	26 560,742	6 640,184	1 660,046 0	415,011 6	103,752 90

STANDARDSISO.COM : Click to view the full PDF of ISO 8608:1995

Table C.4 — Geometric mean and limits of the r.m.s. displacement for the roughness for different classes of roads as a function of the octave bands

NOTE — The mean values for road classes A and H are only for simulation purposes.

a) Spatial frequency units, n

Road class	Mean and limits r.m.s. displacement 10^{-3} m	Octave centre spatial frequency, n_c cycles/m								
		0,007 8	0,016	0,031	0,062	0,125	0,25	0,5	1	2
A	Mean	4	3	2	1,3	1,0	0,7	0,48	0,34	0,24
	Upper	5	4	3	1,9	1,3	1,0	0,67	0,48	0,34
B	Lower	5	4	3	1,9	1,3	1,0	0,67	0,48	0,34
	Mean	8	5	4	2,7	1,9	1,3	0,95	0,67	0,48
	Upper	11	8	5	3,8	2,7	1,9	1,35	0,95	0,67
C	Lower	11	8	5	3,8	2,7	1,9	1,35	0,95	0,67
	Mean	15	11	8	5,4	3,8	2,7	1,90	1,35	0,95
	Upper	22	15	11	7,6	5,4	3,8	2,69	1,90	1,35
D	Lower	22	15	11	7,6	5,4	3,8	2,69	1,90	1,35
	Mean	30	22	15	10,8	7,6	5,4	3,81	2,69	1,90
	Upper	43	30	22	15,2	10,8	7,6	5,38	3,81	2,69
E	Lower	43	30	22	15,2	10,8	7,6	5,38	3,81	2,69
	Mean	61	43	30	21,5	15,2	10,8	7,61	5,38	3,81
	Upper	86	61	43	30,4	21,5	15,2	10,76	7,61	5,38
F	Lower	86	61	43	30,4	21,5	15,2	10,76	7,61	5,38
	Mean	122	86	61	43,1	30,4	21,5	15,22	10,76	7,61
	Upper	172	122	86	60,9	43,1	30,4	21,53	15,22	10,76
G	Lower	172	122	86	60,9	43,1	30,4	21,53	15,22	10,76
	Mean	244	172	122	86,1	60,9	43,1	30,44	21,53	15,22
	Upper	344	244	172	121,8	86,1	60,9	43,05	30,44	21,53
H	Lower	344	244	172	121,8	86,1	60,9	43,05	30,44	21,53
	Mean	487	344	244	172,2	121,8	86,1	60,89	43,05	21,53

b) Angular spatial frequency units, Ω

Road class	Mean and limits r.m.s. displacement 10^{-3} m	Octave centre angular spatial frequency, Ω_c rad/m									
		0,049 1	0,098	0,196	0,393	0,785	1,571	3,14	6,28	12,57	25,13
A	Mean Upper	3,8 5,4	2,7 3,8	1,9 2,7	1,34 1,90	0,95 1,34	0,67 0,95	0,47 0,67	0,34 0,47	0,24 0,34	0,17 0,24
B	Lower Mean Upper	5,4 7,6 10,7	3,8 5,4 7,6	2,7 3,8 5,4	1,90 2,68 3,80	1,34 1,90 2,68	0,95 1,34 1,90	0,67 0,95 1,34	0,47 0,67 0,95	0,34 0,47 0,67	0,24 0,34 0,47
C	Lower Mean Upper	10,7 15,2 21,5	7,6 10,7 15,2	5,4 7,6 10,7	3,80 5,37 7,59	2,68 3,80 5,37	1,90 2,68 3,80	1,34 1,90 2,68	0,95 1,34 1,90	0,67 0,95 1,34	0,47 0,67 0,95
D	Lower Mean Upper	21,5 30,4 42,9	15,2 21,5 30,4	10,7 15,2 21,5	7,59 10,74 15,18	5,37 7,59 10,74	3,80 5,37 7,59	2,68 3,80 5,37	1,90 2,68 3,80	1,34 1,90 2,68	0,95 1,34 1,90
E	Lower Mean Upper	42,9 60,7 85,9	30,4 42,9 60,7	21,5 30,4 42,9	15,18 21,47 30,36	10,74 15,18 21,47	7,59 10,74 15,18	5,37 7,59 10,74	3,80 5,37 7,59	2,68 3,80 5,37	1,90 2,68 3,80
F	Lower Mean Upper	85,9 121,5 171,8	60,7 85,9 121,5	42,9 60,7 85,9	30,36 42,94 60,73	21,47 30,36 42,94	15,18 21,47 30,36	10,74 15,18 21,47	7,59 10,74 15,18	5,37 7,59 10,74	3,80 5,37 7,59
G	Lower Mean Upper	171,8 242,9 343,5	121,5 171,8 242,9	85,9 121,5 171,8	60,73 85,88 121,45	42,94 60,73 85,88	30,36 42,94 60,73	21,47 30,36 42,94	15,18 21,47 30,36	10,74 15,18 21,47	7,59 10,74 15,18
H	Lower Mean	343,5 485,8	242,9 343,5	171,8 242,9	121,45 171,76	85,88 121,45	60,73 85,88	42,94 60,73	30,36 42,94	21,47 30,36	15,18 21,47