RATIONALE

THIS DOCUMENT HAS BEEN REAFFIRMED TO COMPLY WITH THE SAE 5-YEAR REVIEW POLICY.

NOTICE

THIS DOCUMENT HAS BEEN TAKEN DIRECTLY FROM U.S. MILITARY SPECIFICATION AN115651 THRU AN115700 REV. 3, NOTICE 1 AND CONTAINS ONLY MINOR EDITORIAL AND FORMAT CHANGES REQUIRED TO BRING IT INTO CONFORMANCE WITH THE PUBLISHING REQUIREMENTS OF SAE TECHNICAL STANDARDS. THE INITIAL RELEASE OF THIS DOCUMENT IS INTENDED TO REPLACE AN115651 THRU AN115700 REV. 3, NOTICE 1. ANY PART NUMBERS ESTABLISHED BY THE ORIGINAL SPECIFICATION REMAIN UNCHANGED.

THE ORIGINAL MILITARY SPECIFICATION WAS ADOPTED AS AN SAE STANDARD UNDER THE PROVISIONS OF THE SAE TECHNICAL STANDARDS BOARD (TSB) RULES AND REGULATIONS (TSB 001) PERTAINING TO ACCELERATED ADOPTION OF GOVERNMENT SPECIFICATIONS AND STANDARDS. TSB RULES PROVIDE FOR (A) THE PUBLICATION OF PORTIONS OF UNREVISED GOVERNMENT SPECIFICATIONS AND STANDARDS WITHOUT CONSENSUS VOTING AT THE SAE COMMITTEE LEVEL, AND (B) THE USE OF THE EXISTING GOVERNMENT SPECIFICATION OR STANDARD FORMAT.

UNDER DEPARTMENT OF DEFENSE POLICIES AND PROCEDURES, ANY QUALIFICATION REQUIREMENTS AND ADOF
ADOF

Circk to view the full Pr

SAENORM. COM. ASSOCIATED QUALIFIED PRODUCTS LISTS ARE MANDATORY FOR DOD CONTRACTS. ANY REQUIREMENT RELATING TO QUALIFIED PRODUCTS LISTS (QPL'S) HAS NOT BEEN ADOPTED BY SAE AND IS NOT PART OF THIS TECHNICAL REPORT.

THIRD ANGLE PROJECTION

REAFFIRMED 2007-06

SSUED

PREPARED BY COMMITTEE E-25



AEROSPACE STANDARD

SCREW - FLAT FILLISTER HEAD, DRILLED SHANK, .250-28


AS115651 THRU AS115700

SHEET 1 OF 3

Copyright 2007 SAE International

All rights reserved. No part of this publication may be reproduced, stored in a retrieval system or transmitted, in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without the prior written permission of SAE.

TO PLACE A DOCUMENT ORDER: Tel: 877-606-7323 (inside USA and Canada)

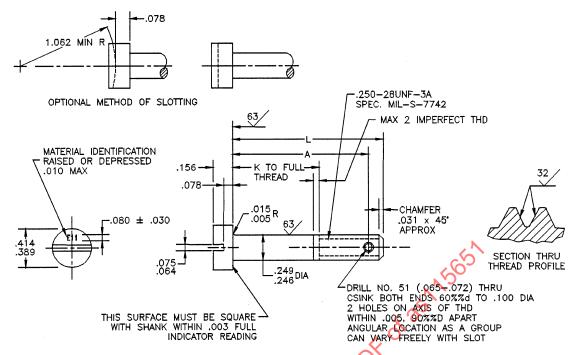

L	А	K +.000 060	PART NO.	L	А	K +.000 060	PART NO.	L	А	K +.000 060	PART NO.
.562 .625 .688	.452 .515 .578	(a) (a) (a)	AN115655 AN115656 AN115657	1.312 1.375 1.438	1.202 1.265 1.328	.688 .750 .812	AN115667 AN115668 AN115669	2.375 2.500 2.625	2.265 2.390 2.515	1.750 1.875 2.000	AN115679 AN115680 AN115681
.750 .812 .875	.640 .702 .765	.125 .188 .250	AN115658 AN115659 AN115660	1.500 1.562 1.625	1.390 1.452 1.515	.875 .938 1.000	AN115670 AN115671 AN115672	2.750 2.875 3.000	2.640 2.765 2.890	2.125 2.250 2.375	AN115682 AN115683 AN115684
.938 1.000 1.062	.828 .890 .952	.312 .375 .438	AN115661 AN115662 AN115663	1.688 1.750 1.875	1.578 1.640 1.765	1.062 1.125 1.250	AN115673 AN115674 AN115675				
1.125 1.188 1.250	1.015 1.078 1.140	.500 .562 .625	AN115664 AN115665 AN115666	2.000 2.125 2.250	1.890 2.015 2.140	1.375 1.500 1.625	AN115676 AN115677 AN115678				

(a) THREAD TO HEAD, MAXIMUM TWO IMPERFECT THREADS.

NOTE:

- (1) THE RUNOUT FOR STRAIGHTNESS OF SHANK SHALL NOT EXCEED .003 FIR PER INCH OF SCREW LENGTH.
- (2) THE CONCENTRICITY OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN .006 FIR. (3) THE CONCENTRICITY OF THE SHANK IN RELATION TO THE HEAD SHALL BE WITHIN .010 FIR.

MATERIAL: STEEL AMS 6322

HARDNESS: ROCKWELL C26-32

FINISH: CADMIUM PLATE AMS 2400

SURFACE ROUGHNESS: AS 107

MANUFACTURING SPECIFICATION: AMS 7452

	AEROSPACE STANDARD	AS115651 THRU	
SAE Aerospace An SAE International Group	SCREW - FLAT FILLISTER HEAD, DRILLED SHANK, .250-28	AS115700 SHEET 2 OF 3	