



SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

REV. C	RATIONALE THIS NONCURRENT STANDARD HAS BEEN STABILIZED.		FEDERAL SUPPLY CLASS 5305	
AS115951 THRU AS116000	STABILIZED NOTICE THIS DOCUMENT HAS BEEN DECLARED "STABILIZED" BY THE SAE E-25 GENERAL STANDARDS FOR AEROSPACE AND PROPULSION SYSTEMS COMMITTEE AND WILL NO LONGER BE SUBJECTED TO PERIODIC REVIEWS FOR CURRENCY. USERS ARE RESPONSIBLE FOR VERIFYING REFERENCES AND CONTINUED SUITABILITY OF TECHNICAL REQUIREMENTS. NEWER TECHNOLOGY MAY EXIST.			
SAE values your input. To provide feedback on this Technical Report, please visit http://www.sae.org/technical/standards/AS115951C			THIRD ANGLE PROJECTION 	
CUSTODIAN: E-25		PROCUREMENT SPECIFICATION: SEE NOTE 3		
		AEROSPACE STANDARD		AS115951 THRU AS116000 SHEET 1 OF 4
		SCREW - FLAT FILLISTER, DRILLED HEAD, CADMIUM PLATED, STEEL UNS G87400, 125 KSI MIN .3125-18 UNC-3A		
		REV. C		

SAENORM.COM : Click to view the full PDF of as115951c

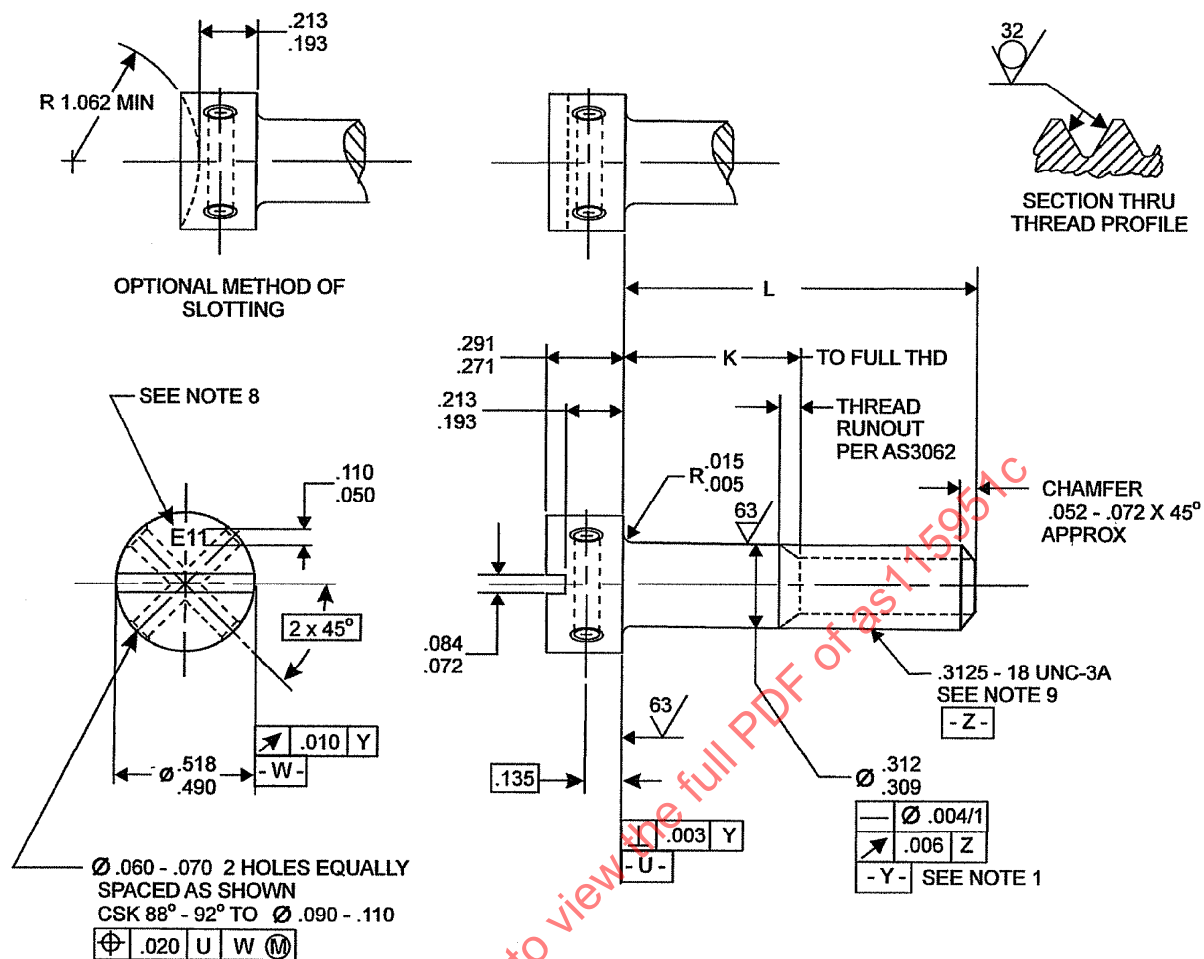

SAENORM.COM : Click to view the full PDF of AS115951C

	AEROSPACE STANDARD		AS115951 THRU AS116000 SHEET 2 OF 4	REV. C
	SCREW - FLAT FILLISTER, DRILLED HEAD, CADMIUM PLATED, STEEL UNS G87400, 125 KSI MIN .3125-18 UNC-3A			

TABLE 1 – PART NUMBERS AND DIMENSIONS

PART NUMBER	L	K	PART NUMBER	L	K
AN115955	0.365 - 0.385	(a)	AN115972	1.428 - 1.448	0.522 - 0.562
AN115956	0.428 - 0.448	(a)	AN115973	1.490 - 1.510	0.565 - 0.625
AN115957	0.490 - 0.510	(a)	AN115974	1.552 - 1.572	0.628 - 0.688
AN115958	0.552 - 0.572	(a)	AN115975	1.615 - 1.635	0.690 - 0.750
AN115959	0.615 - 0.635	(a)	AN115976	1.678 - 1.698	0.752 - 0.812
AN115960	0.678 - 0.698	(a)	AN115977	1.740 - 1.760	0.815 - 0.875
AN115961	0.740 - 0.760	(a)	AN115978	1.802 - 1.822	0.878 - 0.938
AN115962	0.802 - 0.822	(a)	AN115979	1.865 - 1.885	0.940 - 1.000
AN115963	0.865 - 0.885	(a)	AN115980	1.990 - 2.010	1.065 - 1.125
AN115964	0.928 - 0.948	(a)	AN115981	2.115 - 2.135	1.190 - 1.250
AN115965	0.990 - 1.010	0.065 - 0.125	AN115982	2.240 - 2.260	1.315 - 1.375
AN115966	1.052 - 1.072	0.128 - 0.188	AN115983	2.365 - 2.385	1.440 - 1.500
AN115967	1.115 - 1.135	0.190 - 0.250	AN115984	2.490 - 2.510	1.565 - 1.625
AN115968	1.178 - 1.198	0.252 - 0.312	AN115985	2.615 - 2.635	1.690 - 1.750
AN115969	1.240 - 1.260	0.315 - 0.375	AN115986	2.740 - 2.760	1.815 - 1.875
AN115970	1.302 - 1.322	0.378 - 0.438	AN115987	2.865 - 2.885	1.940 - 2.000
AN115971	1.365 - 1.385	0.460 - 0.500	AN115988	2.990 - 3.010	2.065 - 2.125

(a) THREAD TO HEAD PER AS3062

NOTES

NOTICE

THIS DOCUMENT REFERENCES PARTS WHICH CONTAIN CADMIUM AS A PLATING MATERIAL. CONSULT LOCAL OFFICIALS IF YOU HAVE QUESTIONS CONCERNING CADMIUM'S USE.

- FOR PART NUMBERS AN115955 THRU AN115971 THE THREAD PD (DATUM Z) SHALL REPLACE DATUM Y.
- MATERIAL: STEEL PER AMS6322 (UNS G87400)
- PROCUREMENT SPECIFICATION: AS7452
- HARDNESS: 26-32 HRC.
- MAGNETIC PARTICLE INSPECTION PER ASTM E 1444. ACCEPTANCE CRITERIA PER AS7452.
- FINISH: CADMIUM PLATE PER AMS2400
- SURFACE TEXTURE: SYMBOLS PER ASME Y14.36M. REQUIREMENTS PER ASME B46.1. UNLESS OTHERWISE SPECIFIED, SURFACES TO BE 125 MICROINCHES Ra.
- MARK MATERIAL CODE "E11" AS SHOWN PER AS269 AND MANUFACTURER'S IDENTIFICATION RAISED OR DEPRESSED .010 MAX PER AS478 CLASS A.
- THREADS PER MIL-S-7742.
- BREAK SHARP EDGES .003 TO .015 UNLESS OTHERWISE SPECIFIED.
- DIMENSIONS ARE IN INCHES.
- DIMENSIONING AND TOLERANCING PER ANSI Y14-5M-1982 (ASME PUBLICATION).
- DO NOT USE UNASSIGNED PART NUMBERS.

	AEROSPACE STANDARD	AS115951 THRU AS116000 SHEET 3 OF 4	REV. C
	SCREW - FLAT FILLISTER, DRILLED HEAD, CADMIUM PLATED, STEEL UNS G87400, 125 KSI MIN .3125-18 UNC-3A		