

RATIONALE

NEW PART STANDARD

REV.

SAE AS5234


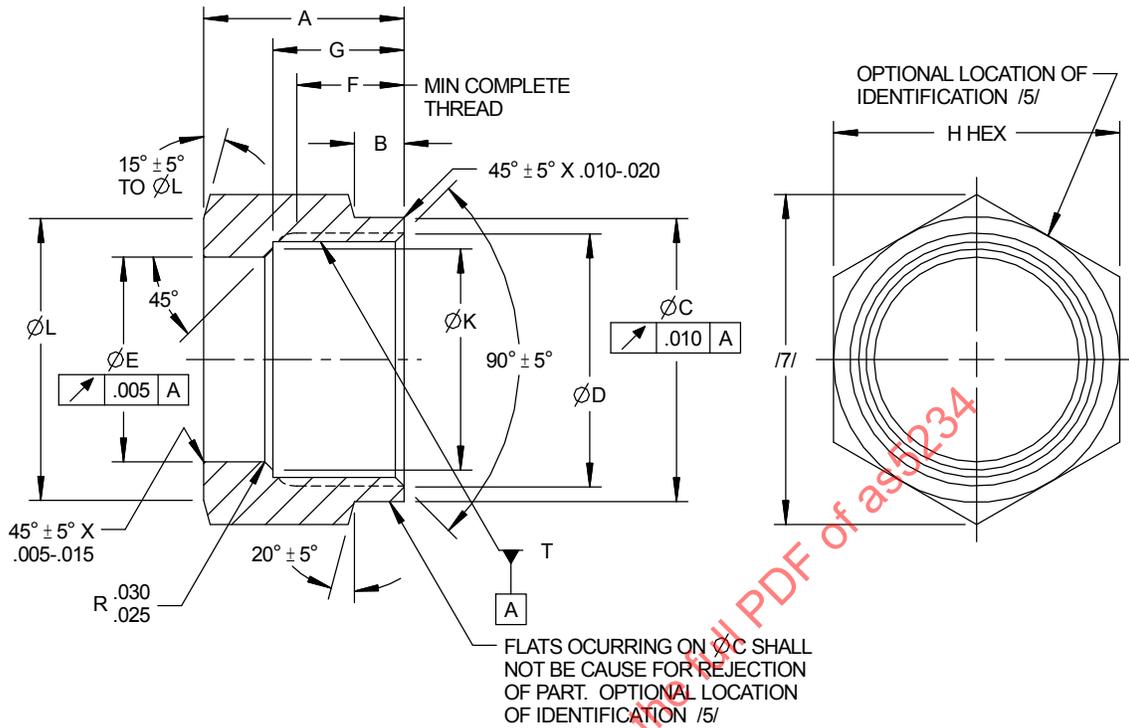


FIGURE 1 - NUT, FLARELESS

SAENORM.COM : Click to view the PDF of as5234

SAE values your input. To provide feedback on this Technical Report, please visit <http://www.sae.org/technical/standards/AS5234>

THIRD ANGLE PROJECTION

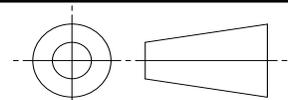

CUSTODIAN: G-3/G-3B

PROCUREMENT SPECIFICATION: /4/ AS18280

**SAE Aerospace**  
An SAE International Group

**AEROSPACE STANDARD**

NUT, COUPLING  
FLARELESS

**SAE AS5234**  
SHEET 1 OF 4

REV.

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

TABLE 1A - DIMENSIONS A - F

BASIC NO. AS5234 /14/ SIZE CODE	(NOMINAL TUBE SIZE)	T THREAD PER AS8879 CLASS 3B						
			A	B	C ±.005	D ±.016	E +.005 -.000	F
02	.125	.3125-24 UNJF	.530	.140	.365	.328	.171	.360
03	.188	.3750-24 UNJF	.580	.100	.427	.391	.232	.366
04	.250	.4375-20 UNJF	.720	.180	.552	.453	.300	.431
05	.312	.5000-20 UNJF	.760	.180	.615	.516	.366	.444
06	.375	.5625-18 UNJF	.800	.180	.677	.578	.425	.422
08	.500	.7500-16 UNJF	.860	.180	.865	.766	.552	.516
10	.625	.8750-14 UNJF	.980	.220	.990	.891	.690	.578
12	.750	1.0625-12 UNJ	1.000	.240	1.240	1.078	.826	.562
14	.875	1.1875-12 UNJ	1.050	.250	1.358	1.204	.950	.562
16	1.000	1.3125-12 UNJ	1.050	.260	1.490	1.328	1.074	.562
20	1.250	1.6250-12 UNJ	1.050	.260	1.990	1.641	1.330	.562
24	1.500	1.8750-12 UNJ	1.030	.220	2.236	1.891	1.580	.562
32	2.000	2.5000-12 UNJ	1.120	.220	2.865	2.562	2.080	.562

TABLE 1B - DIMENSIONS G - L AND WEIGHTS

BASIC NO. AS5234 /14/ SIZE CODE	G	H	K	L	LB/EA	LB/EA	LB/EA	LB/EA
					APPROX REF AL	APPROX REF STEEL	APPROX REF TI	APPROX REF CRES
02	.425	.365-.377	-	.355	.00326	.00943	.00533	.00963
03	.429	.428-.440	-	.418	.00468	.0135	.00764	.00138
04	.547	.552-.565	-	.542	.0108	.0312	.0177	.0319
05	.562	.615-.630	-	.605	.0133	.0384	.0217	.0395
06	.578	.678-.691	-	.668	.0162	.0469	.0265	.0479
08	.609	.865-.878	-	.855	.0258	.0744	.0421	.0760
10	.687	.990-1.003	-	.980	.0352	.102	.0574	.104
12	.687	1.238-1.253	-	1.228	.0606	.175	.0989	.179
14	.687	1.363-1.380	-	1.353	.0723	.210	.119	.214
16	.687	1.488-1.505	-	1.478	.0815	.235	.133	.240
20	.678	1.988-2.005	1.482	1.978	.171	.493	.279	.503
24	.678	2.234-2.260	1.731	2.224	.195	.564	.319	.576
32	.687	2.859-2.885	2.295	2.849	.314	.907	.513	.926

NOTES:

NOTICE

THIS DOCUMENT REFERENCES A PART WHICH CONTAINS CADMIUM AS A PLATING MATERIAL. CONSULT LOCAL OFFICIALS IF YOU HAVE QUESTIONS CONCERNING CADMIUM'S USE.

/1/ MATERIAL:

- a. DASH AS CODE LETTER - TYPE 4130 CARBON STEEL BAR PER AMS6370. /2/
- b. CODE LETTER J - TYPE 304 CORROSION RESISTANT STEEL BAR PER AMS5639.
- c. CODE LETTER K - TYPE 316 CORROSION RESISTANT STEEL BAR PER AMS5648.
- d. CODE LETTER R - TYPE 321 CORROSION RESISTANT STEEL BAR PER AMS5645.
- e. CODE LETTER T - TYPE 6AL-4V TITANIUM ALLOY BAR PER AMS4928.
- f. CODE LETTER V - TYPE 15-5PH CORROSION RESISTANT STEEL BAR PER AMS5659. /2/
- g. CODE LETTER W - TYPE 7075-T73 ALUMINUM ALLOY BAR PER AMS-QQ-A-225/9 OR TYPE 7075-T7351 ALUMINUM ALLOY BAR PER AMS4124. /2/

2. HEAT TREATMENT:

- a. DASH AS MATERIAL CODE - SEE HARDNESS REQUIREMENT PER PROCUREMENT SPECIFICATION.
- b. MATERIAL CODE LETTER J, K, R AND T - NONE
- c. MATERIAL CODE LETTER V - HEAT TREAT TO CONDITION H-1075 PER AMS2759/3
- d. MATERIAL CODE LETTER W - SEE ELECTRICAL CONDUCTIVITY AND HARDNESS REQUIREMENT PER PROCUREMENT SPECIFICATION.

3. FINISH:

- a. DASH AS MATERIAL CODE - CADMIUM PLATE PER AMS-QQ-P-416, TYPE II, CLASS 2 AND COAT WITH A LIGHT FILM OF OIL PER PROCUREMENT SPECIFICATION.
- b. MATERIAL CODE LETTER J, K AND R - PASSIVATE PER AMS2700, TYPE 6 OR 7.
- c. MATERIAL CODE LETTER T - ANODIZE PER AMS2488 OR FLUORIDE PHOSPHATE CONVERSION COAT PER AMS2486.
- d. MATERIAL CODE LETTER V:
  - (1) V CODE PARTS TO BE PASSIVATED ONLY WILL HAVE NO FINISH CODE LETTER AFTER THE SIZE CODE IN THE PART NUMBER. THE FINISH WILL BE: PASSIVATE PER AMS2700, TYPE 2 OR 8.
  - (2) V CODE PARTS TO BE CADMIUM PLATED ONLY WILL HAVE THE FINISH CODE LETTER "P" AFTER THE SIZE CODE IN THE PART NUMBER. THE FINISH WILL BE: CADMIUM PLATE PER AMS-QQ-P-416, TYPE II, CLASS 2.
- e. MATERIAL CODE LETTER W - ANODIZE PER AMS2472 OR PER MIL-A-8625, TYPE II, CLASS 2 DYED BROWN, SIMILAR TO COLOR 10080 OF FED-STD-595.

SAE-NORM.COM : Click to view the full PDF of AS5234

 An SAE International Group	<b>AEROSPACE STANDARD</b>	<b>SAE AS5234</b> SHEET 3 OF 4	<b>REV.</b>
	NUT, COUPLING FLARELESS		