

NOTICE

THIS DOCUMENT HAS BEEN TAKEN DIRECTLY FROM U.S. MILITARY SPECIFICATION MIL-C-85049/1A AND CONTAINS ONLY MINOR EDITORIAL AND FORMAT CHANGES REQUIRED TO BRING IT INTO CONFORMANCE WITH THE PUBLISHING REQUIREMENTS OF SAE TECHNICAL STANDARDS. THE INITIAL RELEASE OF THIS DOCUMENT IS INTENDED TO REPLACE MIL-C-85049/1A. ANY PART NUMBERS ESTABLISHED BY THE ORIGINAL SPECIFICATION REMAIN UNCHANGED.

THE ORIGINAL MILITARY SPECIFICATION WAS ADOPTED AS AN SAE STANDARD UNDER THE PROVISIONS OF THE SAE TECHNICAL STANDARDS BOARD (TSB) RULES AND REGULATIONS (TSB 001) PERTAINING TO ACCELERATED ADOPTION OF GOVERNMENT SPECIFICATIONS AND STANDARDS. TSB RULES PROVIDE FOR (A) THE PUBLICATION OF PORTIONS OF UNREVISED GOVERNMENT SPECIFICATIONS AND STANDARDS WITHOUT CONSENSUS VOTING AT THE SAE COMMITTEE LEVEL, AND (B) THE USE OF THE EXISTING GOVERNMENT SPECIFICATION OR STANDARD FORMAT.


UNDER DEPARTMENT OF DEFENSE POLICIES AND PROCEDURES, ANY QUALIFICATION REQUIREMENTS AND ASSOCIATED QUALIFIED PRODUCTS LISTS ARE MANDATORY FOR DOD CONTRACTS. ANY REQUIREMENT RELATING TO QUALIFIED PRODUCTS LISTS (QPL'S) HAS NOT BEEN ADOPTED BY SAE AND IS NOT PART OF THIS SAE TECHNICAL DOCUMENT.

AS85049/1

SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user." SAE reviews each technical report at least every five years at which time it may be reaffirmed, revised, or cancelled. SAE invites your written comments and suggestions.

SAENORM.COM : Click to view the full PDF of as85049-1

THIRD ANGLE PROJECTION



ISSUED 2001-07

PREPARED BY SAE SUBCOMMITTEE AE-8C1



AEROSPACE STANDARD

CONNECTOR ACCESSORIES, ELECTRICAL, BACKSHELL, ENVIRONMENTAL, CABLE SEALING, STRAIGHT, GROUNDING (WITHOUT STRAIN RELIEF), CATEGORY 1C (FOR MIL-C-5015 SOLDER TYPE, V THREAD OF MS310X CLASSES A, B, C OR K CONNECTORS)

AS85049/1
SHEET 1 OF 6

AS85049/1

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DODISS) SPECIFIED IN THE SOLICITATION: MIL-C-85049.

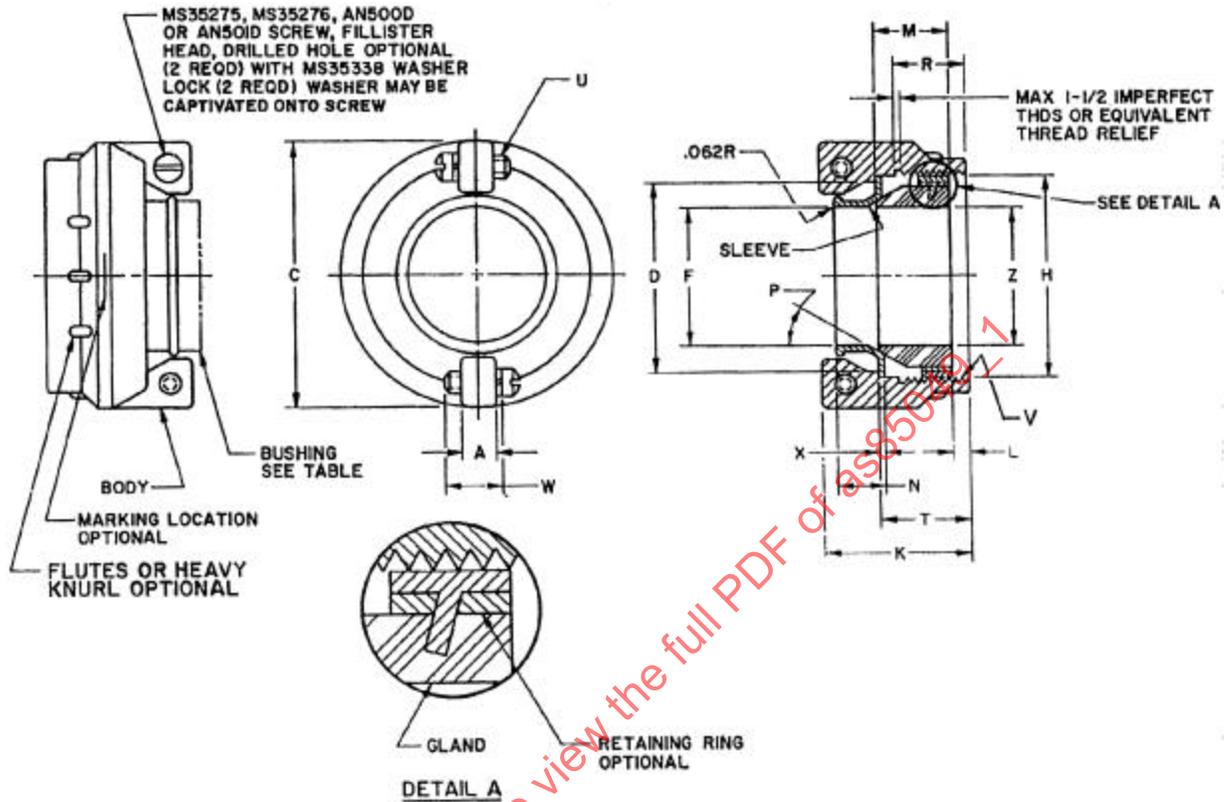


FIGURE 1. CONFIGURATION AND DIMENSIONS.

SAENORM.COM : Click to view the full PDF of AS85049

AS85049/1

TABLE I. DIMENSIONS.

Dash No.	Connector Shell Size (Ref) 1/	A +.031 -.016	C Max	D +.000 -.020 Dia Gland	F +.020 -.000 Dia	H +.000 -.020 Dia	K Max	L Min	M +.031	N	P +2°	R Min	T	U Thread	MS35338 Washer, Lock Dash Number
-3B	8S and 10S	.188	.812	.389	.231	.441	1.031	.156	.473	.254	20°	.531	.641	6-32UNC-2A	136
-4B	10SL, 12S and 12		.937	.510	.315	.560									136
-6B	14S and 14		1.062	.627	.440	.676									136
-8B	16S and 16		1.188	.744	.515	.800									136
-10B	18		1.312	.870	.614	.926									136
-12B	20 and 22	.250	1.562	1.037	.738	1.107	1.219	.625	.320	30°	.719	8-32UNC-2A	137		
-16B	24 and 28		1.750	1.286	.926	1.357							137		
-20B	32	.312	2.250	1.590	1.200	1.670	1.547	.940	.406	35°	.562	.797	10-32UNF-2A	138	
-24B	36		2.375	1.844	1.363	1.920								138	
-28B	40		2.625	2.083	1.611	2.162								138	
-32B	44	.375	2.812	2.332	1.865	2.412	1.734	.188	1.047	.500	.781	1.172	1.234	138	
-40B	48		3.312	2.832	2.365	2.912								1.781	138

Dash No.	Fillister Head Screw				V Thread	W Min	X	Z Dia Approx (Gland)		Bushing (Ref)	Max Cable Dia
	AN500D Dash Number	MS35275 Dash Number	AN501D Dash Number	MS35276 Dash Number				Free	Closed		
	-3B	6-5	227								
-4B	6-5	227			.625-24 UNEF-2B	.312	.094	MS3420-4A	.302		
-6B	6-5	227			.750-20 UNEF-2B	.438	.230	MS3420-6A	.428		
-8B	6-5	227			.875-20 UNEF-2B	.531	.312	MS3420-8A	.515		
-10B	6-5	227			1.000-20 UNEF-2B	.625	.375	MS3420-10A	.614		
-12B	8-6	243			1.188-18 UNEF-2B	.344	.032 +.012 -.003	.750	.445	MS3420-12A	.738
-16B	8-6	243			1.438-18 UNEF-2B			.938	.594	MS3420-16A	.926
-20B			10-7	262	1.750-18 UNS-2B	.406	.051 ±.006	1.250	.922	MS3420-20A	1.200
-24B			10-7	262	2.000-18 UNS-2B			1.375	.922	MS3420-24A	1.363
-28B			10-7	262	2.250-16 UN-2B			1.625	1.180	MS3420-28A	1.611
-32B			10-7	262	2.500-16 UN-2B			.064 ±.006	1.875	1.375	MS3420-32A
-40B			10-7	262	3.000-16 UN-2B	2.375	1.875				

1/ Clamp mates with connector shell size listed in the column.

AS85049/1

INCH	mm	INCH	mm	INCH	mm
0.003	0.08	0.531	13.49	1.219	30.96
0.006	0.15	0.537	13.64	1.234	31.34
0.010	0.25	0.560	14.22	1.250	31.75
0.012	0.30	0.562	14.27	1.286	32.66
0.013	0.33	0.594	15.09	1.312	33.32
0.016	0.41	0.614	15.60	1.344	34.14
0.020	0.51	0.625	15.88	1.357	34.47
0.025	0.64	0.627	15.93	1.363	34.62
0.027	0.68	0.641	16.28	1.375	34.92
0.032	0.81	0.662	16.81	1.438	36.53
0.051	1.30	0.672	17.07	1.547	39.29
0.062	1.57	0.676	17.17	1.562	39.67
0.064	1.63	0.719	18.26	1.590	40.39
0.094	2.39	0.738	18.75	1.611	40.92
0.156	3.96	0.744	18.90	1.625	41.28
0.188	4.78	0.750	19.05	1.670	42.42
0.209	5.30	0.781	19.84	1.734	44.04
0.219	5.56	0.797	20.24	1.750	44.45
0.230	5.84	0.800	20.32	1.781	45.24
0.231	5.87	0.812	20.62	1.844	46.84
0.254	6.45	0.870	22.10	1.865	47.37
0.281	7.14	0.875	22.23	1.875	47.63
0.302	7.67	0.922	23.41	1.920	48.77
0.312	7.92	0.926	23.52	2.000	50.8
0.315	8.00	0.937	23.80	2.083	52.91
0.320	8.13	0.940	23.88	2.162	54.91
0.344	8.74	0.969	24.61	2.250	57.15
0.375	9.53	1.000	25.4	2.332	59.23
0.389	9.88	1.016	25.81	2.365	60.07
0.406	10.31	1.031	26.19	2.375	60.33
0.428	10.87	1.037	26.34	2.412	61.26
0.438	11.13	1.047	26.59	2.500	63.5
0.440	11.18	1.062	26.97	2.625	66.68
0.441	11.20	1.094	27.79	2.812	71.42
0.445	11.30	1.107	28.12	2.832	71.93
0.473	12.01	1.172	29.77	2.912	73.96
0.510	12.95	1.180	29.97	3.000	76.2
0.515	13.08	1.200	30.48	3.312	84.12

AEROSPACE STANDARD

CONNECTOR ACCESSORIES, ELECTRICAL, BACKSHELL,
ENVIRONMENTAL, CABLE SEALING, STRAIGHT, GROUNDING
(WITHOUT STRAIN RELIEF), CATEGORY 1C (FOR MIL-C-5015 SOLDER
TYPE, V THREAD OF MS310X CLASSES A, B, C OR K CONNECTORS)

AS85049/1
SHEET 4 OF 6