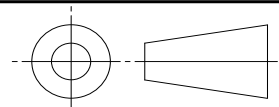


SAE Technical Standards Board Rules provide that: "This report is published by SAE to advance the state of technical and engineering sciences. The use of this report is entirely voluntary, and its applicability and suitability for any particular use, including any patent infringement arising therefrom, is the sole responsibility of the user."

SAE reviews each technical report at least every five years at which time it may be revised, reaffirmed, stabilized, or cancelled. SAE invites your written comments and suggestions.

REV. B	FEDERAL SUPPLY CLASS 5310	
	<p>RATIONALE</p> <p>AS9356B HAS BEEN REAFFIRMED TO COMPLY WITH THE SAE FIVE-YEAR REVIEW POLICY.</p> <p>THE INITIAL SAE PUBLICATION OF THIS DOCUMENT WAS TAKEN DIRECTLY FROM U.S. MILITARY STANDARD MS9356F. THIS SAE STANDARD RETAINS THE SAME PART NUMBERS ESTABLISHED BY THE ORIGINAL MILITARY DOCUMENT.</p> <p>ANY REQUIREMENTS ASSOCIATED WITH QUALIFIED PRODUCTS LISTS (QPL) MAY CONTINUE TO BE MANDATORY FOR DOD CONTRACTS. REQUIREMENTS RELATING TO QPL'S HAVE NOT BEEN ADOPTED BY THE SAE FOR THIS STANDARD AND ARE NOT PART OF THIS SAE DOCUMENT.</p>	
SAE AS9356	<p>SAENORM.COM : Click to view the full PDF of as9356b</p>	
<p>SAE values your input. To provide feedback on this Technical Report, please visit http://www.sae.org/technical/standards/AS9356B</p>		<p>THIRD ANGLE PROJECTION</p> 
CUSTODIAN: E-25		PROCUREMENT SPECIFICATION: NONE
<p>SAE Aerospace An SAE International Group</p>	<p>AEROSPACE STANDARD</p> <p>NUT, PLAIN, HEXAGON, UNS S66286</p>	<p>SAE AS9356 SHEET 1 OF 3</p>
		<p>REV. B</p>

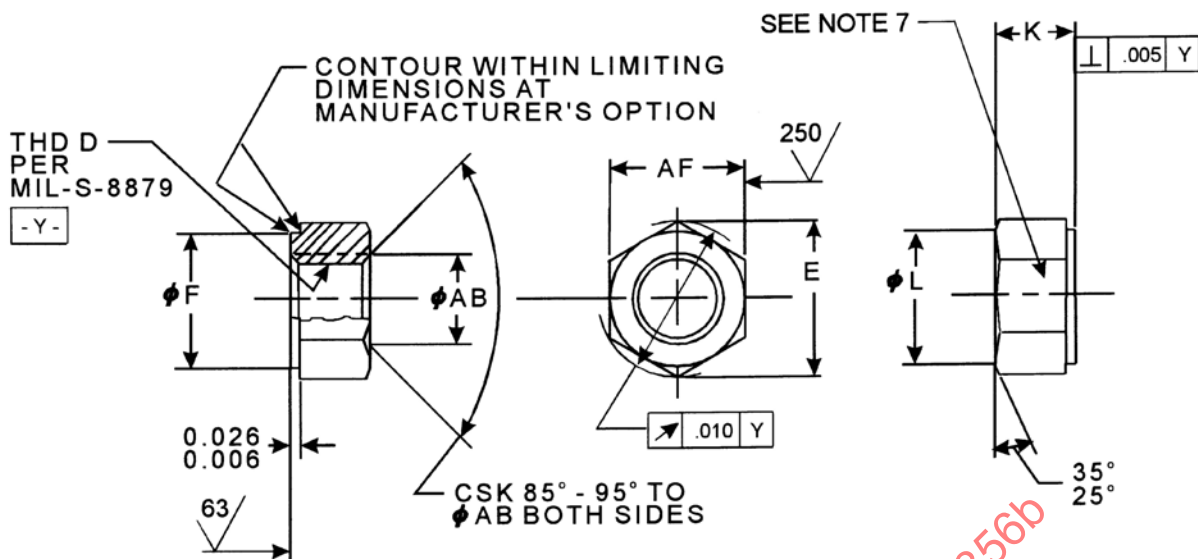


FIGURE 1

TABLE 1 - PART NUMBERS AND DIMENSIONS

PART NUMBER	D NOMINAL THREAD UNJF-3B	AF	E MIN	F MIN	AB	K	L MIN	APPROX. MASS LB/100
MS9356-04	.1120-48	0.243 - 0.251	0.268	0.240	0.112 - 0.132	0.126 - 0.146	0.240	.18
MS9356-06	.1380-40	0.305 - 0.313	0.339	0.302	0.138 - 0.158	0.126 - 0.146	0.302	.28
MS9356-08	.1640-36	0.336 - 0.345	0.375	0.334	0.164 - 0.194	0.126 - 0.146	0.334	.33
MS9356-09	.1900-32	0.367 - 0.376	0.410	0.365	0.190 - 0.220	0.146 - 0.166	0.365	.43
MS9356-10	.2500-28	0.429 - 0.439	0.481	0.428	0.250 - 0.280	0.209 - 0.229	0.428	.77
MS9356-11	.3125-24	0.492 - 0.502	0.552	0.490	0.312 - 0.342	0.256 - 0.276	0.490	1.13
MS9356-12	.3750-24	0.553 - 0.564	0.623	0.552	0.375 - 0.405	0.318 - 0.338	0.552	1.68
MS9356-13	.4375-20	0.678 - 0.690	0.765	0.678	0.438 - 0.468	0.365 - 0.385	0.678	2.87
MS9356-14	.5000-20	0.741 - 0.752	0.836	0.740	0.500 - 0.535	0.428 - 0.448	0.740	3.97
MS9356-15	.5625-18	0.865 - 0.877	0.978	0.865	0.562 - 0.597	0.474 - 0.494	0.865	6.19
MS9356-16	.6250-18	0.928 - 0.940	1.049	0.928	0.625 - 0.660	0.537 - 0.557	0.928	7.70
MS9356-17	.7500-16	1.052 - 1.064	1.192	1.052	0.750 - 0.785	0.646 - 0.666	1.052	10.95
MS9356-18	.8750-14	1.239 - 1.252	1.405	1.240	0.875 - 0.910	0.756 - 0.776	1.240	17.93
MS9356-19	1.0000-12	1.427 - 1.440	1.619	1.428	1.000 - 1.035	0.865 - 0.885	1.428	27.40